



ELECTRONICS, INC.
44 FARRAND STREET
BLOOMFIELD, NJ 07003
(973) 748-5089
<http://www.nteinc.com>

NTE156A Silicon General Purpose Rectifier


Features:

- Low Cost
- High Current Capability
- Low Leakage
- Low Forward Voltage
- High Surge Capability

Maximum Ratings and Electrical Characteristics: (Note 1)

Peak Reverse Voltage, V_{RRM}	1000V
Maximum RMS Voltage, $V_{R(RMS)}$	700V
Maximum DC Blocking Voltage, V_R	1000V
Maximum Average Forward Rectified Current, I_O	3A
Peak Forward Surge Current (8.3ms superimposed), I_{FSM}	200A
Maximum Forward Voltage ($I_O = 3A$), V_F	1.2V
Maximum DC Reverse Current ($V_R = 1000V$), I_R	5μA
Typical Junction Capacitance ($V_R = 4V$), C_J	70pF
Operating Temperature Range, T_{opr}	-65° to +175°C
Storage Temperature Range, T_{stg}	-65° to +175°C

Note 1. Ratings at +25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz resistive or inductive load. For capacitive load, derate current by 20%.

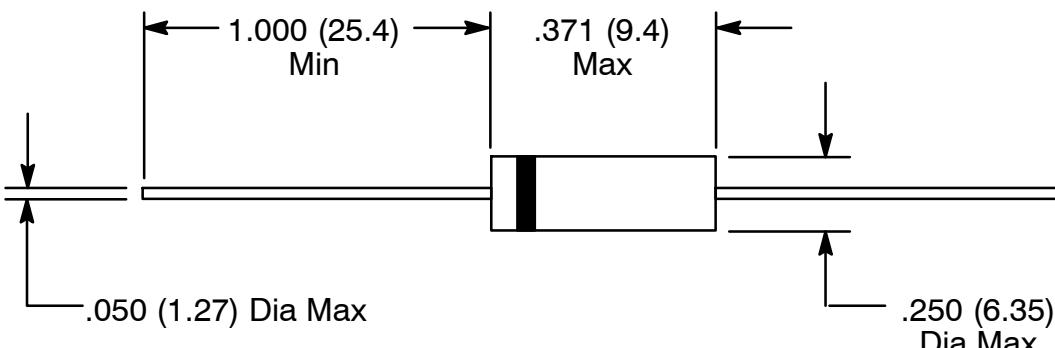

Color Band Denotes Cathode

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [nte](#) manufacturer:

Other Similar products are found below :

[747](#) [797](#) [868](#) [1724](#) [NEH680M50FE](#) [NEHH1.0M450CB](#) [NTE48](#) [NTE526A](#) [228A](#) [231](#) [954](#) [2023](#) [510](#) [R04-11A30-120](#) [04-SLPE3750A](#)
[5615](#) [591](#) [7056](#) [7448](#) [NEH.10M50AA](#) [NEH2.2M63AA](#) [NEH330M35DD](#) [NEH33M10AA](#) [NEV.22M100AA](#) [NTE528](#) [NTE542](#) [NTE74154](#)
[04-SCBW25L-BK](#) [04-SCBW32L-BK](#) [04-SCW10C-BK](#) [04-SCBW19L-GR](#) [04-SCW19L-WH](#) [04-SCW19L-OR](#) [04-SCW38L-WH](#) [04-SCBW50L-OR](#) [04-SCBW50L-GR](#) [04-SCW10C-GR](#) [04-SCW10C-OR](#) [04-SCBW32L-GR](#) [04-SCBW32L-WH](#) [04-SCBW32L-OR](#) [04-SCBW6C-WH](#) [04-SCBW6C-GR](#) [04-SCBW6C-OR](#) [04-SCBW25L-GR](#) [04-SCBW25L-WH](#) [04-ESNF-500L](#) [04-SL.625-R-5](#) [04-SCW5C-WH](#) [04-ESNF-1000L](#)