



ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089
<http://www.nteinc.com>

NTE178MP Silicon Diode, Matched Pair 225 Volts/400 Milliamperes

Description:

The NTE178MP is a matched pair of silicon diodes rated at 225 volts and 400 milliamps.

Features:

- High temperature soldering Guaranteed +350°C/10 seconds/.375", (9.5mm) lead length at 5 lbs., (2.3kg) tension
- Glass passivated junction

Mechanical Data:


Polarity: Color band denotes cathode

Mounting Position: Any

Maximum Ratings and Electrical Characteristics: ($T_A = +25^\circ\text{C}$ unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.)

Maximum Recurrent Peak Reverse Voltage	225V
Maximum RMS Voltage	156V
Maximum DC Blocking Voltage	225V
Minimum Avalanche Breakdown Voltage ($T_A = +100^\circ\text{C}$)	275V
Maximum Average Forward Rectified Current (.375", (9.5mm) Lead Length)	
$T_A = +25^\circ\text{C}$	400mA
$T_A = +150^\circ\text{C}$	150mA
Peak Forward Surge Current (8.3ms Single Half Sine-Wave Superimposed on Rated Load)	15A
Maximum Instantaneous Forward Voltage at 400mA	1.0V
Maximum DC Reverse Current at rated DC Blocking Voltage	
$T_A = +25^\circ\text{C}$	0.2µA
$T_A = +100^\circ\text{C}$	15µA
Typical Junction Capacitance (Note 1)	15pF
Operating Junction Temperature Range, T_J	-65° to +175°C
Storage Temperature Range, T_{stg}	-65° to +200°C

Note 1. Measured at 1.0MHz and applied reverse voltage of 4.0 V_{DC}

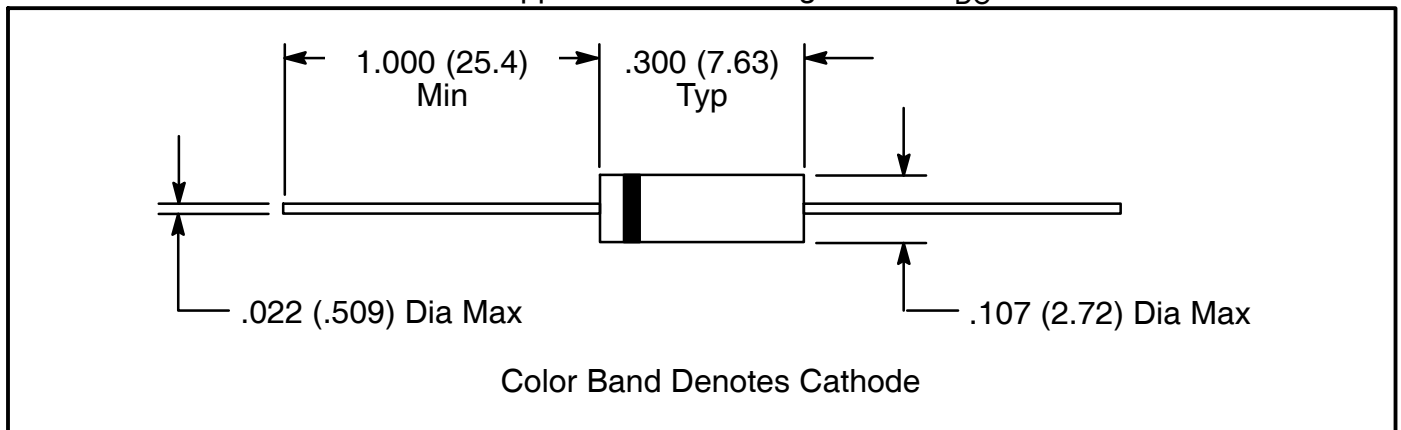

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Diodes - General Purpose, Power, Switching category](#):

Click to view products by [NTE manufacturer](#):

Other Similar products are found below :

[RD0306T-H](#) [BAV17-TR](#) [BAV19-TR](#) [1N3611](#) [NTE156A](#) [NTE571](#) [NTE574](#) [NTE5804](#) [NTE5806](#) [NTE6244](#) [1SS181-TP](#) [1SS193,LF](#)
[1SS400CST2RA](#) [SDAA13](#) [SHN2D02FUTW1T1G](#) [LS4151GS08](#) [1N4449](#) [1N456A](#) [1N4934-E3/73](#) [1N914B](#) [1N914BTR](#) [RFUH20TB3S](#)
[BAW56DWQ-7-F](#) [BAW75-TAP](#) [MM230L-CAA](#) [IDW40E65D1](#) [JAN1N3600](#) [LL4151-GS18](#) [053684A](#) [SMMSD4148T3G](#) [707803H](#)
[NSVDAN222T1G](#) [SP000010217](#) [CDSZC01100-HF](#) [BAV199E6433HTMA1](#) [BAV70M3T5G](#) [SMBT2001T1G](#) [NTE5801](#) [NTE5800](#)
[NTE5808](#) [NTE6240](#) [NTE6248](#) [BAS28-7](#) [BAW56HDW-13](#) [BAS28 TR](#) [VS-HFA04SD60STR-M3](#) [NSVM1MA152WKT1G](#) [BAV99TQ-13-F](#)
[BAS21DWA-7](#) [P600K](#)