



ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089

NTE180 (PNP) & NTE181 (NPN) Silicon Power Transistor High Power Audio Amplifier

Description:

The NTE180 (PNP) and NTE181 (NPN) are silicon complementary transistors in a TO3 type case designed for use as output devices in complementary audio amplifiers to 100 watts music power per channel.

Features:

- High DC Current Gain: $h_{FE} = 25 - 100 @ I_C = 7.5A$
- Excellent Safe Operating Area

Absolute Maximum Ratings:

Collector–Emitter Voltage, V_{CER}	100V
Collector–Base Voltage, V_{CB}	100V
Collector–Emitter Voltage, V_{CEO}	90V
Emitter–Base Voltage, V_{EB}	4V
Collector Current, I_C	30A
Base Current, I_B	7.5A
Total Device Dissipation ($T_C = +25^\circ C$), P_D	200W
Derate Above $25^\circ C$	1.14W/ $^\circ C$
Operating Junction Temperature Range, T_J	-65° to $+200^\circ C$
Storage Temperature Range, T_{stg}	-65° to $+200^\circ C$
Thermal Resistance, Junction–to–Case, R_{thJC}	0.875 $^\circ C/W$

Electrical Characteristics: ($T_C = +25^\circ C$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
OFF Characteristics						
Collector–Emitter Breakdown Voltage	$V_{(BR)CER}$	$I_C = 200mA, R_{BE} = 100\Omega$, Note 1	100	–	–	V
Collector–Emitter Sustaining Voltage	$V_{CEO(sus)}$	$I_C = 200mA$, Note 1	90	–	–	V
Collector–Base Cutoff Current	I_{CBO}	$V_{CB} = 100V, I_E = 0$	–	–	1.0	mA
		$V_{CB} = 100V, I_E = 0, T_C = +150^\circ C$	–	–	5.0	mA
Emitter–Base Cutoff Current	I_{EBO}	$V_{BE} = 4V, I_C = 0$	–	–	1.0	mA

Note 1. Pulse Test: Pulse Width $\leq 300\mu s$. Duty Cycle $\leq 2\%$.


Electrical Characteristics (Cont'd): ($T_C = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
ON Characteristics (Note 1)						
DC Current Gain	h_{FE}	$I_C = 7.5\text{A}, V_{CE} = 2\text{V}$	25	–	100	
Base–Emitter ON Voltage	$V_{BE(on)}$	$I_C = 7.5\text{A}, V_{CE} = 2\text{V}$	–	–	1.3	V
Collector–Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 7.5\text{A}, I_B = 750\text{mA}$	–	–	0.8	V
Base–Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = 7.5\text{A}, I_B = 750\text{mA}$	–	–	1.3	V
Dynamic Characteristics						
Current Gain–Bandwidth Product	f_T	$I_C = 1\text{A}, V_{CE} = 10\text{V}, f = 1\text{MHz}$	2.0	–	–	MHz

Note 1. Pulse Test: Pulse Width $\leq 300\mu\text{s}$. Duty Cycle $\leq 2\%$.

Note 2. NTE181MP is a matched pair of NTE181 with their DC Current Gain (h_{FE}) matched to within 10% of each other.

Note 3. NTE180MCP is a matched complementary pair containing 1 each of NTE180 (PNP) and NTE181 (NPN).

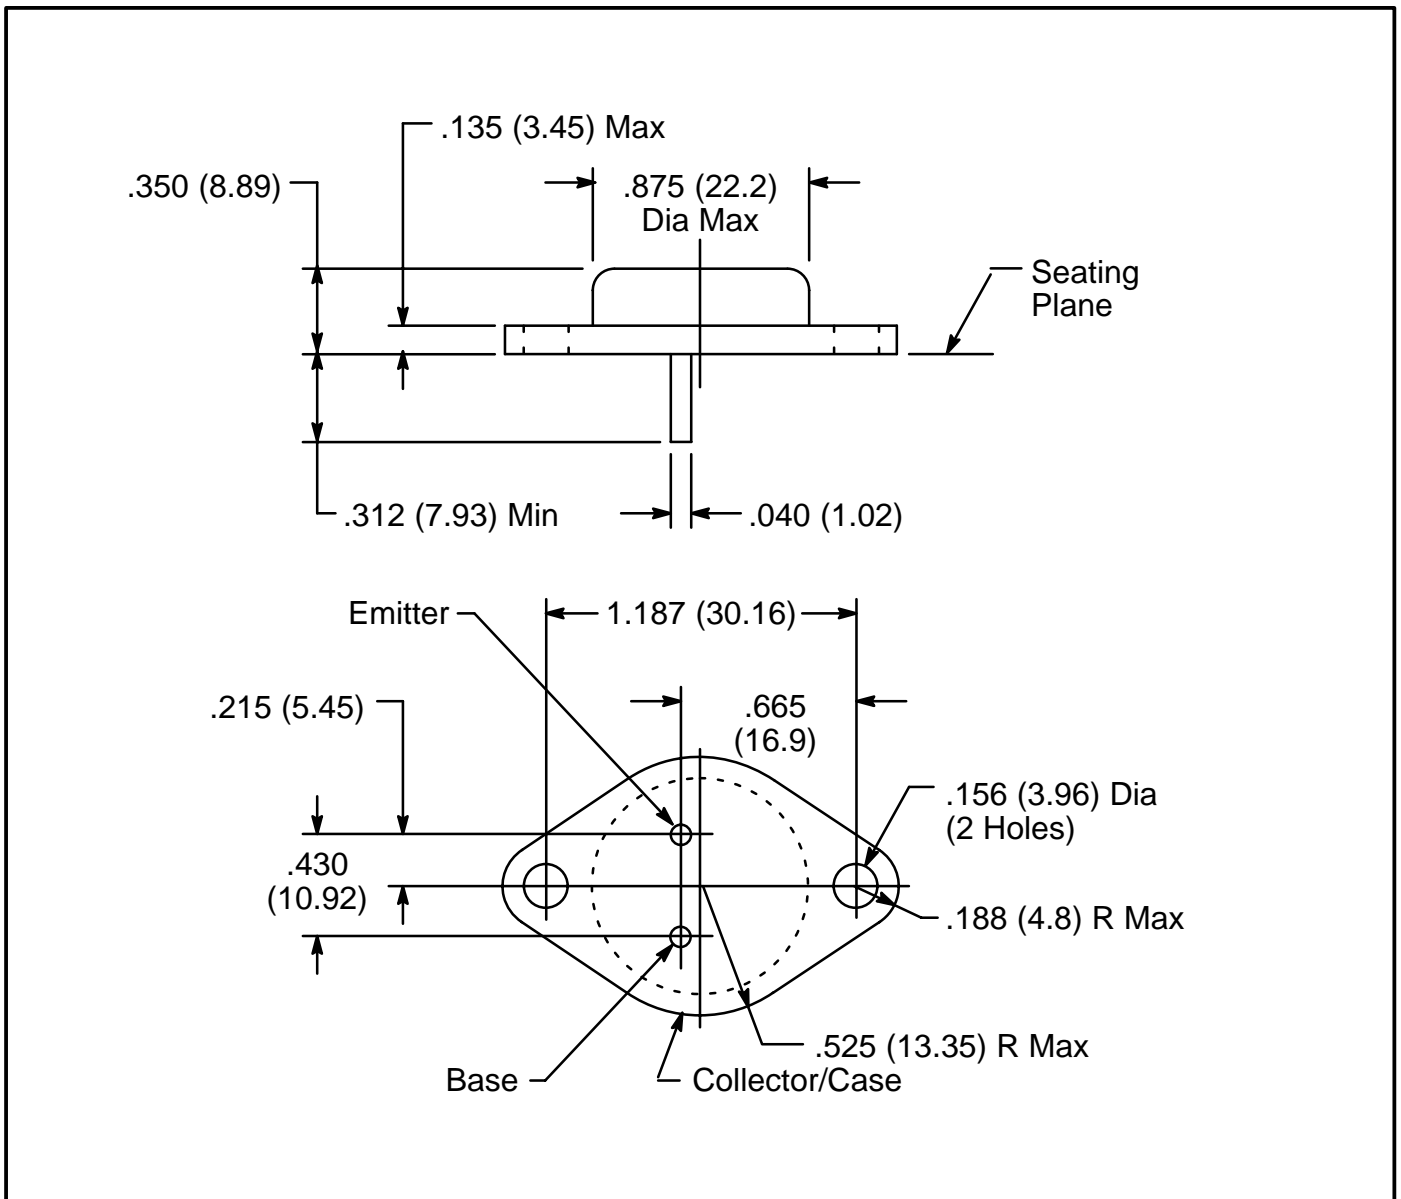

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [NTE manufacturer](#):

Other Similar products are found below :

[02-LDR1](#) [02-LDR12](#) [02-LDR13](#) [02-LDR14](#) [02-LDR15](#) [02-LDR2](#) [02-LDR20](#) [02-LDR21](#) [02-LDR22](#) [02-LDR23](#) [02-LDR3](#) [02-LDR4](#) [02-N101-1](#) [02-N103-1](#) [04-04180](#) [04-06100SS](#) [04-ACC10](#) [04-ACC20](#) [04-ACC30](#) [04-ACC40](#) [04-CCL3129](#) [04-CW07-50](#) [04-CW14-50](#) [04-ES-1000](#) [04-ESNF1000-10](#) [04-ESNF-1000L](#) [04-ESNF-250L](#) [04-ESNF-375L](#) [04-MP10009](#) [04-SCBW19L-GR](#) [04-SCBW25L-BK](#) [04-SCBW25L-GR](#) [04-SCBW25L-WH](#) [04-SCBW32L-BK](#) [04-SCBW32L-GR](#) [04-SCBW32L-OR](#) [04-SCBW32L-WH](#) [04-SCBW50L-GR](#) [04-SCBW50L-OR](#) [04-SCBW6C-GR](#) [04-SCBW6C-OR](#) [04-SCBW6C-WH](#) [04-SCW10C-BK](#) [04-SCW10C-GR](#) [04-SCW10C-OR](#) [04-SCW19L-OR](#) [04-SCW5C-WH](#) [04-SL1.00-G](#) [04-SL1.00-G-10](#) [04-SL1.00-G-5](#)