



ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089
<http://www.nteinc.com>

NTE2311 Silicon NPN Transistor High Voltage, High Speed Switch TO-3P Type Package

Description:

The NTE2311 is a silicon NPN transistor in a TO-3P type case designed for use in high voltage, high speed switching applications.

Features:

- High Blocking Capability: $V_{CEX} = 1000V$
- Wide Surge Area: $I_{CSM} = 55A @ 350V$

Applications:

- Switchmode Power Supply
- DC/DC and DC/AC Converters
- Motor Control

Absolute Maximum Ratings: ($T_C = +25^\circ C$ unless otherwise specified)

Collector-Emitter Voltage, V_{CEO}	450V
Collector-Emitter Voltage ($V_{BE} = -2.5V$), V_{CEX}	1000V
Emitter-Base Voltage, V_{EBO}	7V
Collector Current ($t_p \leq 5ms$), I_C	
Continuous	15A
Peak	30A
Base Current ($t_p \leq 5ms$), I_B	
Continuous	4A
Peak	20A
Power Dissipation, P_{tot}	
$T_C = +25^\circ C$	150W
$T_C = +60^\circ C$	115W
Operating Junction Temperature Range, T_J	-65° to $+175^\circ C$
Thermal Resistance, Junction-to-Case, R_{thJC}	$1^\circ C/W$


Electrical Characteristics: ($T_J = +25^\circ C$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
OFF Characteristics						
Collector-Emitter Sustaining Voltage	$V_{CEO(sus)}$	$I_B = 0, I_C = 200mA, L = 25mH$	450	-	-	V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_C = 0, I_E = 50mA$	7	-	30	V
Collector Cutoff Current	I_{CEX}	$T_J = +25^\circ C$	$V_{CE} = V_{CEX},$ $V_{BE} = -2.5V$	-	0.2	mA
		$T_J = +125^\circ C$		-	2.0	mA
	I_{CER}	$T_J = +25^\circ C$	$V_{CE} = V_{CEX},$ $R_{BE} = 10\Omega$	-	0.5	mA
		$T_J = +125^\circ C$		-	4.0	mA

Electrical Characteristics (Cont'd): ($T_J = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit	
OFF Characteristics (Cont,d)							
Emitter Cutoff Current	I_{EBO}	$I_C = 0, V_{BE} = -5V$	-	-	1	mA	
ON Characteristics (Note 1)							
DC Current Gain	h_{FE}	$I_C = 8A_{dc}, V_{CE} = 5V_{dc}$	10	-	-	-	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 8A, I_B = 1.6A$	-	-	1.5	V	
		$I_C = 12A, I_B = 2.4A$	-	-	5.0	V	
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = 8A, I_B = 1.6A$	-	-	1.6	V	
Switching Characteristics (Switching Times on Resistive Load)							
Turn-On Time	t_{on}	$V_{CC} = 150V, I_C = 8A,$ $I_{B1} = -I_{B2} = 1.6A$	-	0.55	1.0	μs	
Storage Time	t_s		-	1.5	3.0	μs	
Fall Time	t_f		-	0.3	0.8	μs	
Switching Characteristics (Switching Times on Inductive Load)							
Storage Time	t_s	$T_J = +25^\circ\text{C}$	$V_{CC} = 300V,$ $V_{BB} = -5V,$ $L_B = 3\mu\text{H},$ $I_C = 8A,$ $I_{Bend} = 1.6A$	-	3.5	-	μs
		$T_J = +125^\circ\text{C}$		-	-	5.0	μs
Fall Time	t_f	$T_J = +25^\circ\text{C}$		-	0.08	-	μs
		$T_J = +125^\circ\text{C}$		-	-	0.4	μs

Note 1. Pulse Test: Pulse Width < 300 μs , Duty Cycle < 2%

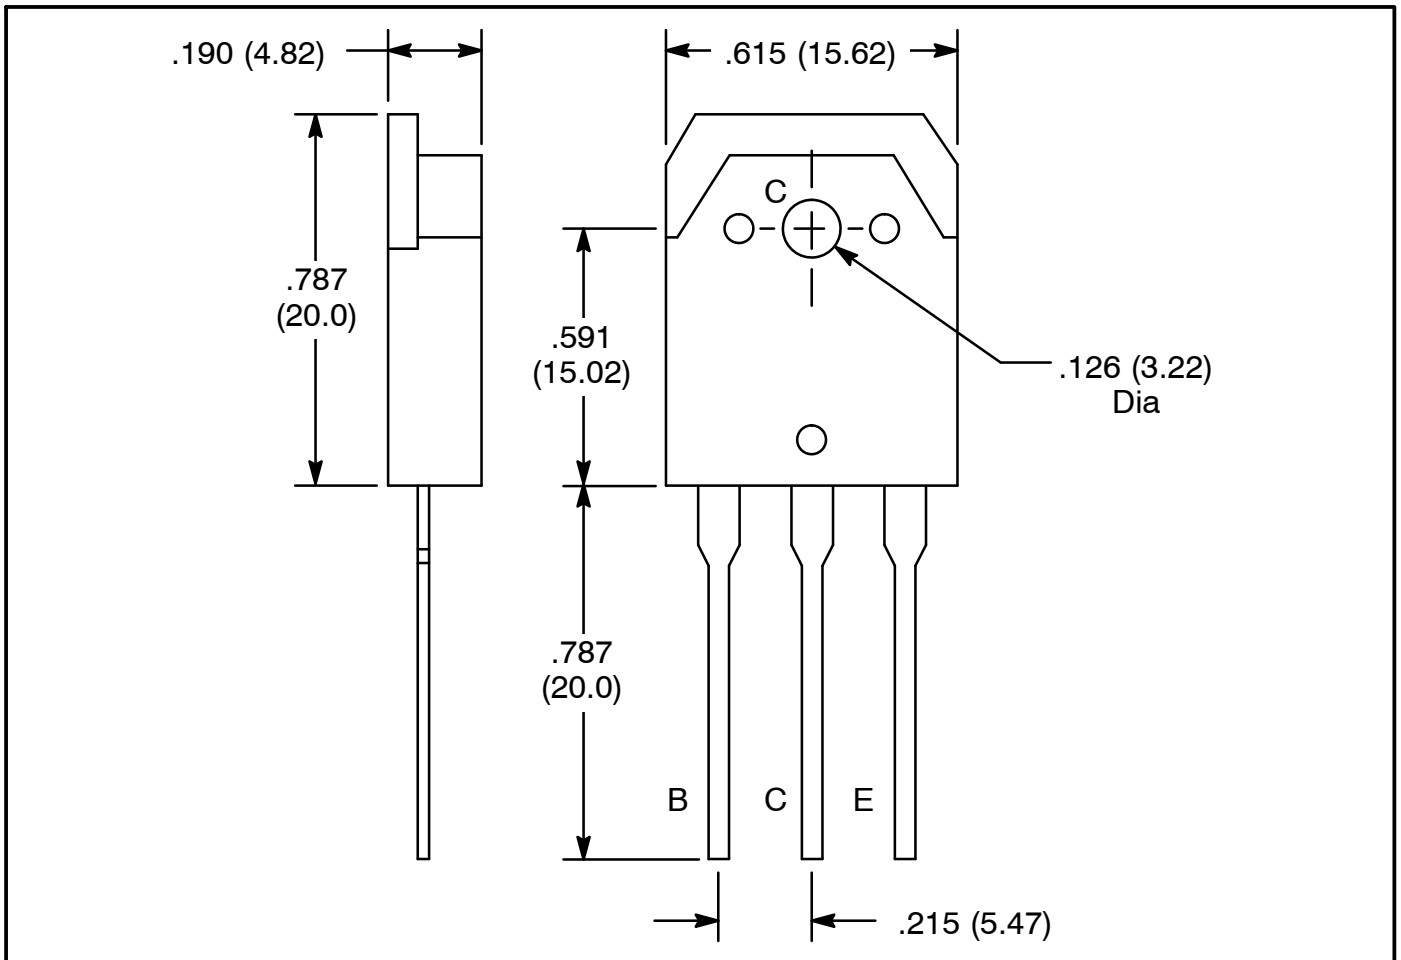

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [NTE manufacturer](#):

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-](#)
[TL-H](#) [2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)