



NTE2313 Silicon NPN Transistor High Speed Switch

Description:

The NTE2313 is a high-voltage, high-speed, glass-passivated NPN power transistor in a TO220 type package designed for use in converters, inverters, switching regulators, motor control systems, and switching applications.

Absolute Maximum Ratings:

Collector-Emitter Voltage, $V_{CEO(sus)}$	450V
Collector-Emitter Voltage, V_{CES}	1000V
Emitter-Base Voltage, V_{EBO}	5V
Collector Current, I_C		
Continuous		2A
Peak (Note 1)		3A
Base Current, I_B		
Continuous		0.75A
Peak (Note 1)		1A
Peak Reverse Base Current, $-I_{BM}$	1A
Total Power Dissipation ($T_C = +25^\circ\text{C}$), P_{tot}	50W
Derate Above 25°C		400mW/ $^\circ\text{C}$
Operating Junction Temperature Range, T_J	-65° to $+150^\circ\text{C}$
Storage Temperature range, T_{stg}	-65° to $+150^\circ\text{C}$
Thermal Resistance, Junction-to-Case, R_{thJC}	2.5 $^\circ\text{C}/\text{W}$
Thermal Resistance, Junction-to-Ambient, R_{thJA}	62.5 $^\circ\text{C}/\text{W}$
Lead Temperature (During Soldering, 1/8" from case, 5sec), T_L	+275 $^\circ\text{C}$

Note 1. Pulse Test: Pulse Width = 5ms, Duty Cycle \leq 10%.

Electrical Characteristics: ($T_C = +25^\circ\text{C}$ unless otherwise specified)


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
OFF Characteristics (Note 2)						
Collector-Emitter Sustaining Voltage	$V_{CEO(sus)}$	$I_C = 100\text{mA}$, $L = 25\text{mH}$	450	-	-	V
Collector Cutoff Current	I_{CES}	$V_{CS} = 1000\text{V}$	-	-	0.2	mA
		$V_{CS} = 1000\text{V}$, $T_C = +125^\circ\text{C}$	-	-	1.5	mA
Emitter Cutoff Current	I_{EBO}	$I_C = 0$, $V_{EB} = 5\text{V}$	-	-	1	mA

Note 2. Pulse Test: Pulse Width = 300 μs , Duty Cycle \leq 2%.

Electrical Characteristics (Cont'd): ($T_C = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
ON Characteristics (Note 2)						
DC Current Gain	h_{FE}	$I_C = 0.1\text{A}, V_{CE} = 5\text{V}$	30	50	—	
Collector-Emitter Saturation Voltage	$V_{CE(\text{sat})}$	$I_C = 0.3\text{A}, I_B = 30\text{mA}$	—	—	0.8	V
		$I_C = 1\text{A}, I_B = 200\text{mA}$	—	—	1.0	V
Base-Emitter Saturation Voltage	$V_{BE(\text{sat})}$	$I_C = 1\text{A}, I_B = 0.2\text{A}$	—	—	1.1	V
Dynamic Characteristics						
Current-Gain Bandwidth Product	f_T	$I_C = 500\text{mA}, V_{CE} = 10\text{V}, f = 1\text{MHz}$	4	—	—	MHz
Switching Characteristics						
Turn-On Time	t_{on}	$V_{CC} = 250\text{V}, I_C = 1\text{A}, I_{B1} = 0.2\text{A}, I_{B2} = 0.4\text{A}$	—	0.3	0.5	μs
Storage Time	t_s		—	2.0	3.5	μs
Fall Time	t_f		—	0.3	—	μs

Note 2. Pulse Test: Pulse Width = 300 μs , Duty Cycle $\leq 2\%$.

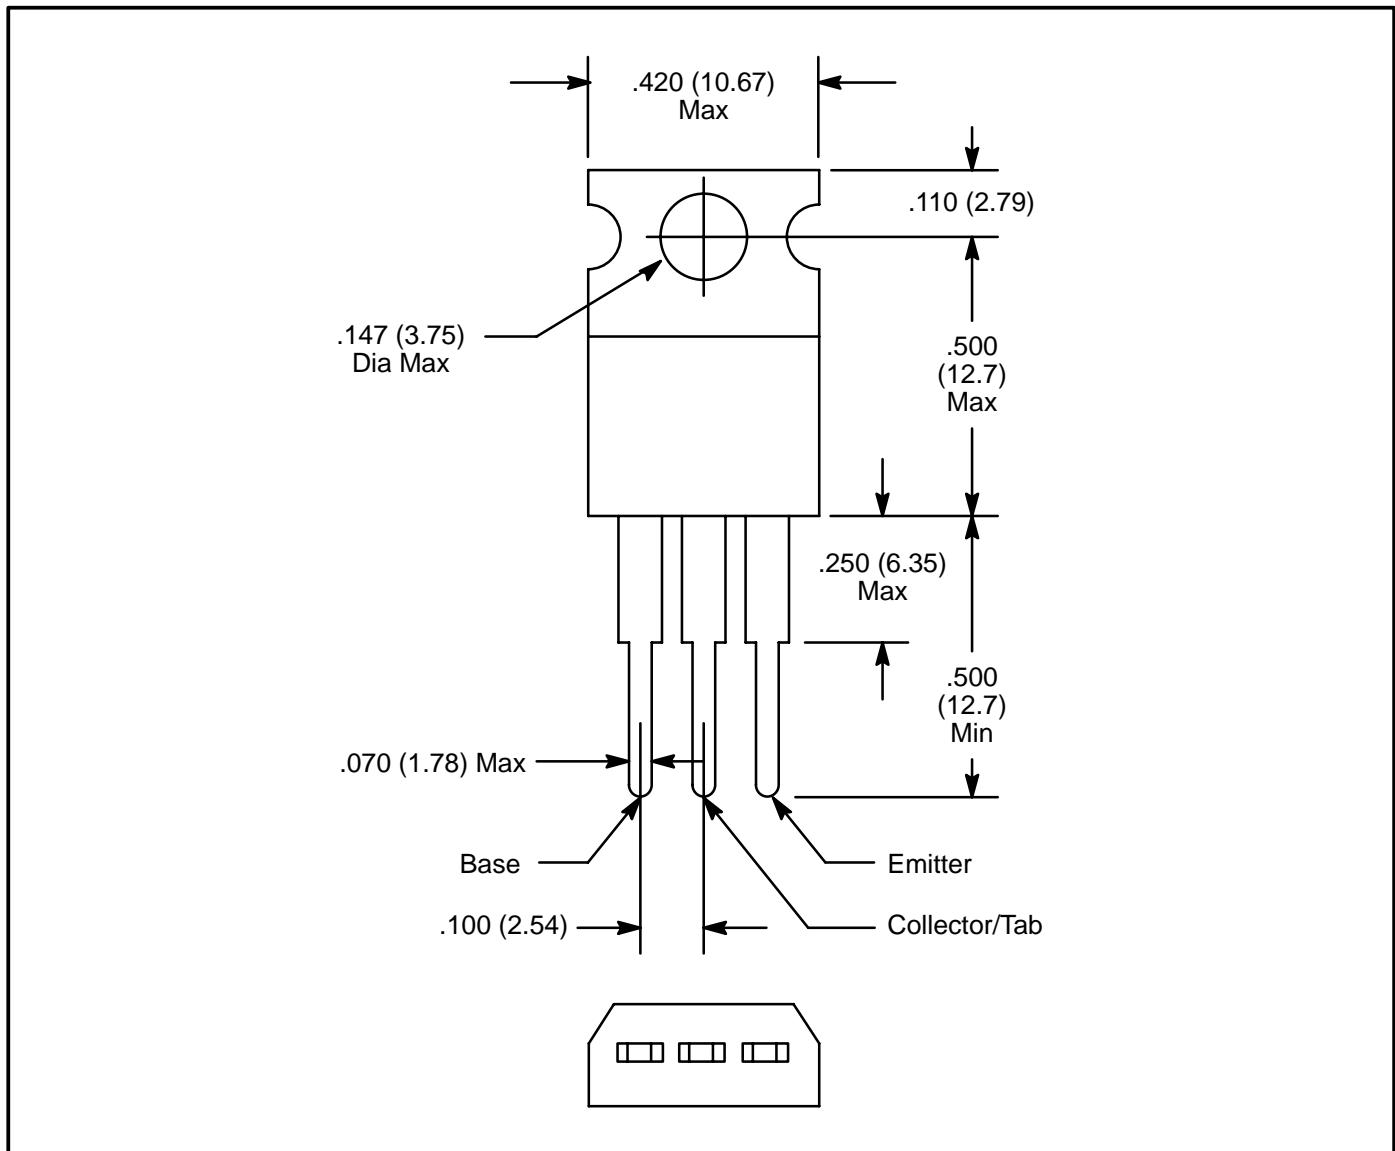

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - BJT category:

Click to view products by NTE manufacturer:

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#)
[2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)