



NTE241 (NPN) & NTE242 (PNP) **Silicon Complementary Transistors** **Audio Power Amplifier, Switch**

Description:

The NTE241 (NPN) and NTE242 (PNP) are silicon complementary transistors in a TO220 type package designed for use in power amplifier and switching circuits.

Absolute Maximum Ratings:

Collector-Emitter Voltage, V_{CEO}	80V
Collector-Base Voltage, V_{CB}	80V
Emitter-Base Voltage, V_{EB}	5V
Collector Current, I_C	4A
Base Current, I_B	1A
Total Power Dissipation ($T_C = +25^\circ\text{C}$), P_D	60W
Derate Above 25°C	320mW/ $^\circ\text{C}$
Operating Junction Temperature Range, T_J	-65° to +150° $^\circ\text{C}$
Storage Temperature Range, T_{stg}	-65° to +150° $^\circ\text{C}$
Thermal Resistance, Junction-to-Case, $R_{\Theta JC}$	3.12° $^\circ\text{C}/\text{W}$

Electrical Characteristics: ($T_C = +25^\circ\text{C}$ unless otherwise specified)



Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
OFF Characteristics						
Collector-Emitter Sustaining Voltage	$V_{CEO(sus)}$	$I_C = 100\text{mA}$, $I_B = 0$, Note 1	80	-	-	V
Collector Cutoff Current	I_{CEO}	$V_{CE} = 80\text{V}$, $I_B = 0$	-	-	1.0	mA
	I_{CEX}	$V_{CE} = 80\text{V}$, $V_{EB(off)} = 1.5\text{V}$	-	-	0.1	mA
		$V_{CE} = 80\text{V}$, $V_{EB(off)} = 1.5\text{V}$, $T_C = +125^\circ\text{C}$	-	-	2.0	mA
	I_{CBO}	$V_{CB} = 80\text{V}$, $I_E = 0$	-	-	0.1	mA
Emitter Cutoff Current	I_{EBO}	$V_{BE} = 5\text{V}$, $I_C = 0$	-	-	1.0	mA

Note 1. Pulse Test: Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$.

Electrical Characteristics (Cont'd): ($T_C = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
ON Characteristics (Note 1)						
DC Current Gain	h_{FE}	$I_C = 1.5\text{A}, V_{CE} = 2\text{V}$	20	—	80	
		$I_C = 4.0\text{A}, V_{CE} = 2\text{V}$	7	—	—	
Collector-Emitter Saturation Voltage	$V_{CE(\text{sat})}$	$I_C = 1.5\text{A}, I_B = 150\text{mA}$	—	—	0.6	V
		$I_C = 4.0\text{A}, I_B = 1\text{A}$	—	—	1.4	V
Base-Emitter ON Voltage	$V_{BE(\text{on})}$	$I_C = 1.5\text{A}, V_{CE} = 2\text{V}$	—	—	1.2	V
Dynamic Characteristics						
Small-Signal Current Gain	h_{fe}	$I_C = 100\text{mA}, V_{CE} = 2\text{V}, f = 1\text{kHz}$	25	—	—	
Current-Gain Bandwidth Product	f_T	$I_C = 1\text{A}, V_{CE} = 4\text{V}, f = 1\text{MHz}$	2.5	—	—	MHz

Note 1. Pulse Test: Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$.

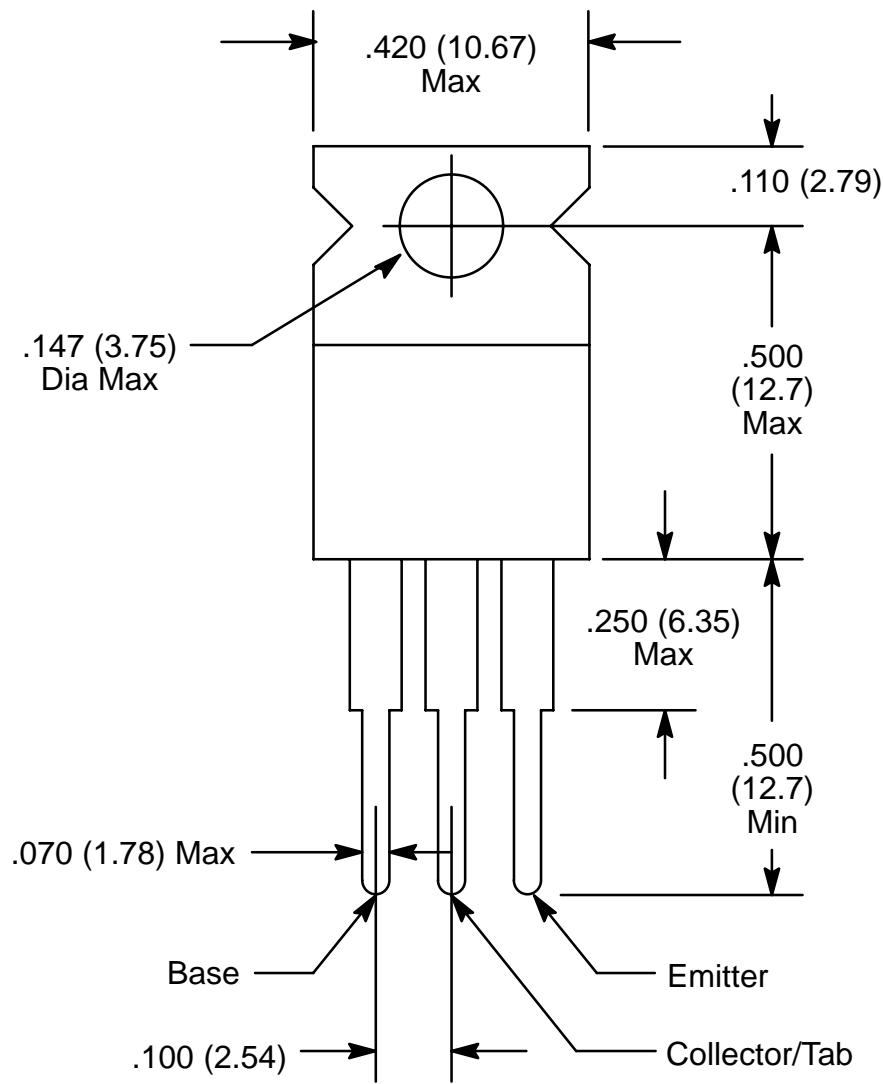

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - BJT category:

Click to view products by NTE manufacturer:

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#)
[2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)