



NTE2594 Silicon NPN Transistor High Voltage, High Current Switch

Features:

- High Breakdown Voltage, High Reliability
- Fast Switching Speed
- Wide ASO

Absolute Maximum Ratings: ($T_A = +25^\circ\text{C}$ unless otherwise specified)


Collector–Base Voltage, V_{CBO}	800V
Collector–Emitter Voltage, V_{CEO}	500V
Emitter–Base Voltage, V_{EBO}	7V
Collector Current, I_C	
Continuous	15A
Pulsed (PW $\leq 300\mu\text{s}$, Duty Cycle $\leq 10\%$)	25A
Base Current, I_B	4A
Collector Dissipation, P_C	
$T_A = +25^\circ\text{C}$	3W
$T_C = +25^\circ\text{C}$	55W
Operating Junction Temperature, T_J	+150°C
Storage Temperature Range, T_{stg}	−55° to +150°C

Electrical Characteristics: ($T_A = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector Cutoff Current	I_{CBO}	$V_{CB} = 500\text{V}$, $I_E = 0$	—	—	10	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = 5\text{V}$, $I_C = 0$	—	—	10	μA
DC Current Gain	h_{FE}	$V_{CE} = 5\text{V}$, $I_C = 1.2\text{A}$	15	—	50	
		$V_{CE} = 5\text{V}$, $I_C = 6\text{A}$	8	—	—	
Gain Bandwidth Product	f_T	$V_{CE} = 10\text{V}$, $I_C = 1.2\text{A}$	—	18	—	MHz
Output Capacitance	C_{ob}	$V_{CB} = 10\text{V}$, $f = 1\text{MHz}$	—	160	—	pF
Collector–Emitter Saturation Voltage	$V_{CE(\text{sat})}$	$I_C = 6\text{A}$, $I_B = 1.2\text{A}$	—	—	1.0	V
Base–Emitter Saturation Voltage	$V_{BE(\text{sat})}$	$I_C = 6\text{A}$, $I_B = 1.2\text{A}$	—	—	1.5	V
Collector–Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C = 1\text{mA}$, $I_E = 0$	800	—	—	V
Collector–Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 5\text{mA}$, $R_{BE} = \infty$	500	—	—	V
Emitter–Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E = 1\text{mA}$, $I_C = 0$	7	—	—	V

Electrical Characteristics (Cont'd): ($T_A = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector-Emitter Sustaining Voltage	$V_{CEX(\text{sus})}$	$I_C = 5\text{A}$, $I_{B1} = I_{B2} = 2\text{A}$, $L = 500\mu\text{H}$, Clamped	500	—	—	V
Turn-On Time	t_{on}	$5I_{B1} = -2.5I_{B2} = I_C = 7\text{A}$, $V_{CC} = 200\text{V}$, $R_L = 28.6\Omega$	—	—	0.5	μs
Storage Time	t_{stg}		—	—	3.0	μs
Fall Time	t_f		—	—	0.3	μs

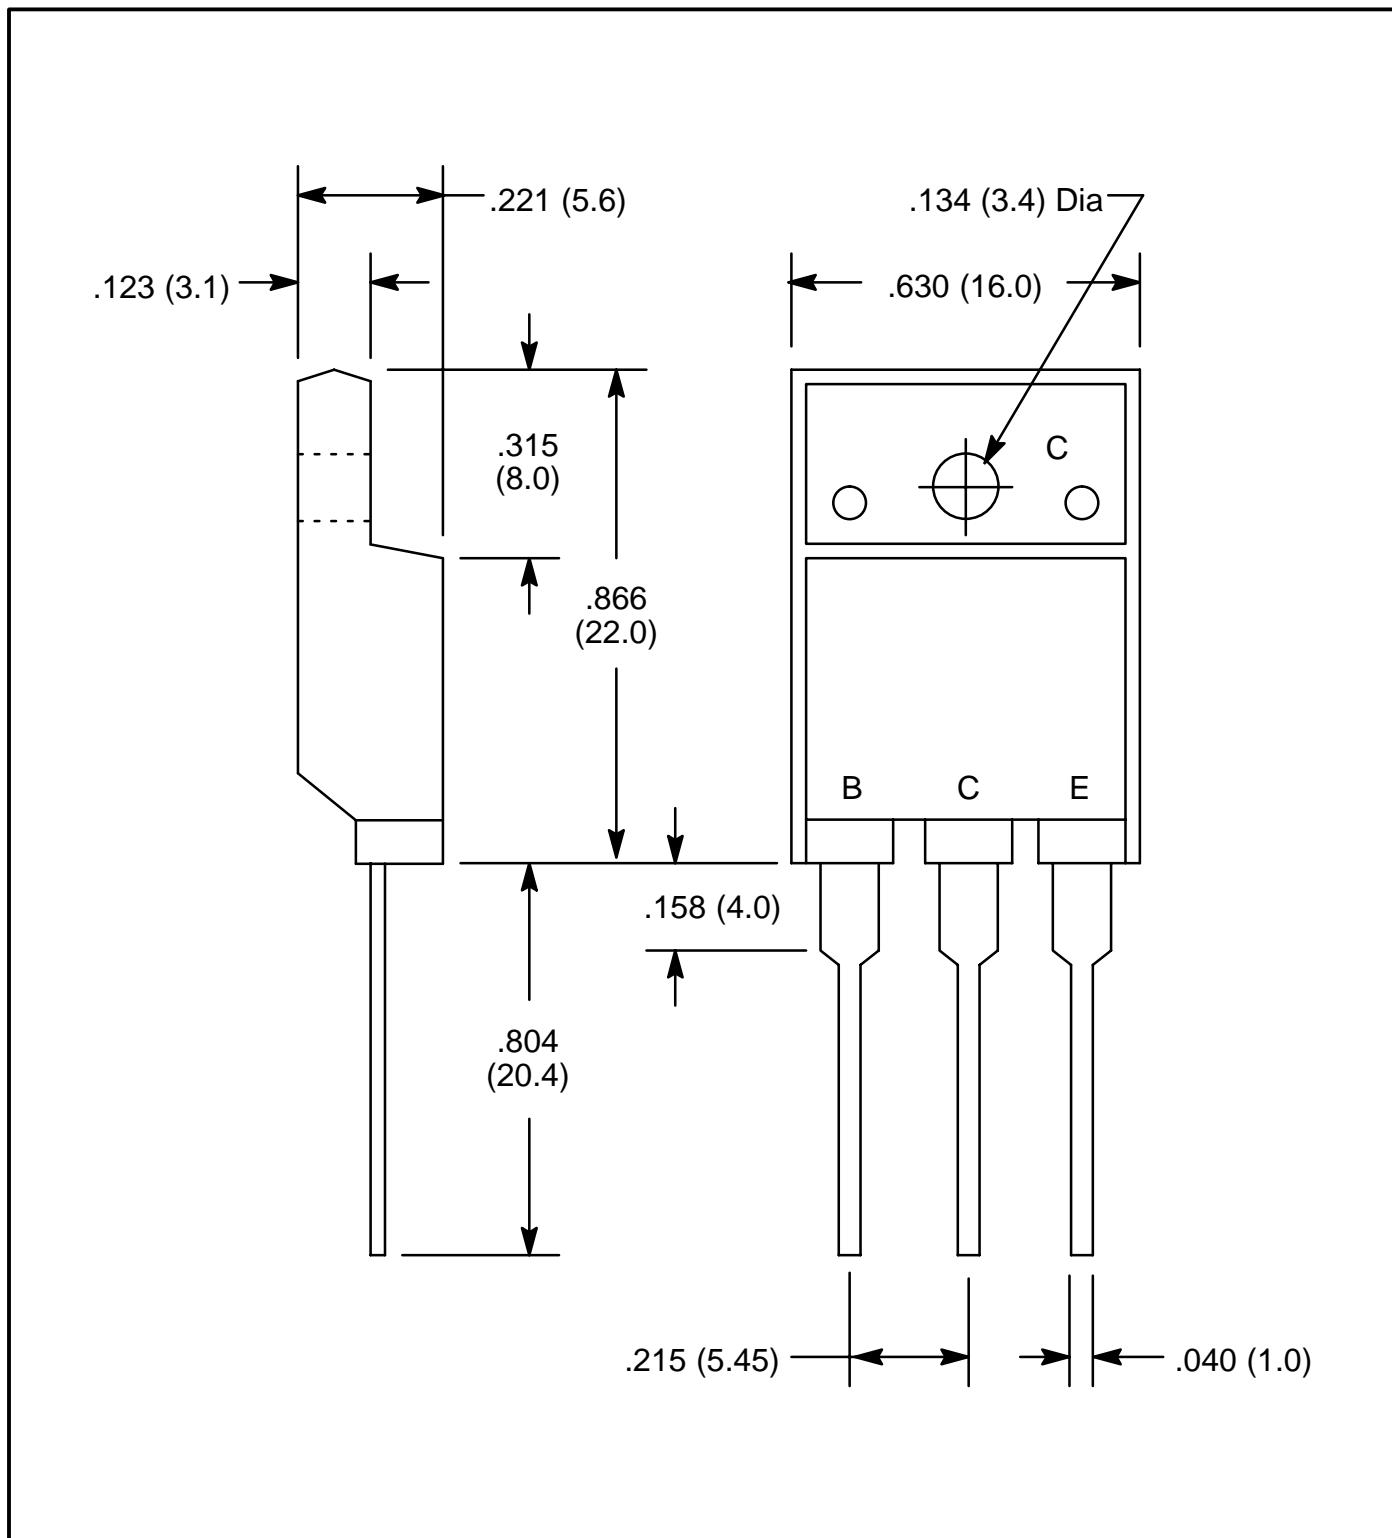

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - BJT category:

Click to view products by NTE manufacturer:

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#)
[2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)