



ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089
<http://www.nteinc.com>

NTE2673 (NPN) & NTE2674 (PNP) Silicon Complementary Transistors General Purpose Power TO220FP Type Package

Features:

- Low Collector–Emitter Saturation Voltage: $V_{CE(sat)} = 0.5V$ Typ ($I_C/I_B = 2A/0.2A$)

Absolute Maximum Ratings: ($T_A = +25^\circ C$ unless otherwise specified)

Collector–Base Voltage, V_{CBO}	60V
Collector–Emitter Voltage, V_{CEO}	50V
Emitter–Base Voltage, V_{EBO}	5V
Collector Current, I_C	
Continuous	3A
Peak (Note 1)	4.5A
Collector Power Dissipation ($T_C = +25^\circ C$, Note 2), P_D	25W
Operating Junction Temperature, T_J	+150°C
Storage Temperature Range, T_{stg}	–55° to +150°C


Note 1. Single pulse: Pulse Width = 10ms.

Note 2. Printed circuit board 1.7mm thick, collector copper plating 1cm² or larger.

Electrical Characteristics: ($T_A = +25^\circ C$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector–Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C = 50\mu A$	60	–	–	V
Collector–Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 1mA$	50	–	–	V
Emitter–Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E = 50\mu A$	5	–	–	V
Collector Cutoff Current	I_{CBO}	$V_{CE} = 40V$	–	–	1	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = 4V$	–	–	1	μA
Collector–Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 2A, I_B = 200mA, \text{Note 3}$	–	0.5	1.0	V
DC Current Transfer Ratio	h_{FE}	$I_C = 500mA, V_{CE} = 3V, \text{Note 3}$	60	–	320	
Transition Frequency	f_T	$I_E = -500mA, V_{CE} = 5V, f = 30MHz, \text{Note 3}$	–	90	–	MHz
Output Capacitance	C_{ob}	$V_{CB} = 10V, I_E = 0A, f_{test} = 1MHz$	–	40	–	pF

Note 3. Measured using pulse current.

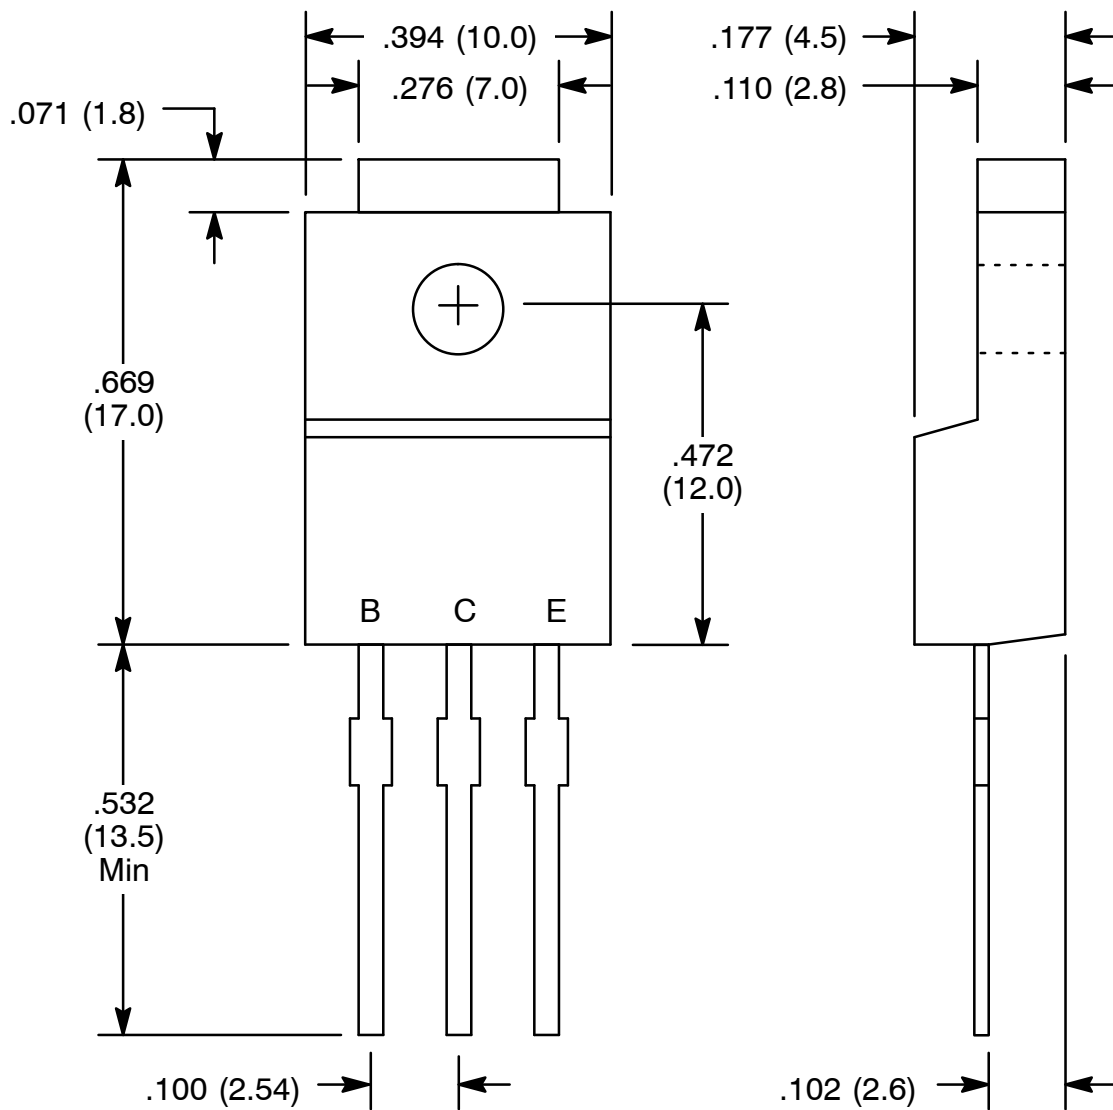

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [NTE manufacturer](#):

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-](#)
[TL-H](#) [2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)