




ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089
<http://www.nteinc.com>



NTE2916 MOSFET N-Ch, Enhancement Mode High Speed Switch TO247 Type Package

Features:

- Advanced Process Technology
- Dynamic dv/dt Rating
- +175°C Operating Temperature
- Fast Switching
- Fully Avalanche Rated
- Ease of Paralleling



Description:

The NTE2916 Power MOSFET utilizes advanced processing techniques to achieve extremely low on-resistance per silicon area. This benefit, combined with the fast switching speed and ruggedized device design provides the designer with an extremely efficient and reliable device for use in a wide variety of applications.

The TO247 package is preferred for commercial-industrial applications where higher power levels preclude the use of TO220 devices. The TO247 is similar, but superior, to the TO218 package because of its isolated mounting hole.

Absolute Maximum Ratings:

Continuous Drain Current ($V_{GS} = 10V$), I_D	
$T_C = +25^\circ C$	50A
$T_C = +100^\circ C$	35A
Pulsed Drain Current (Note 1), I_{DM}	200A
Power Dissipation ($T_C = +25^\circ C$), P_D	300W
Derate Linearly Above 25°C	2.0W/°C
Gate-to-Source Voltage, V_{GS}	±20
Single Pulse Avalanche Energy (Note 2), E_{AS}	560mJ
Avalanche Current (Note 1), I_{AR}	50A
Repetitive Avalanche Energy (Note 1), E_{AR}	30mJ
Peak Diode Recovery dv/dt (Note 3), dv/dt	10V/ns
Operating Junction Temperature Range, T_J	-55° to +175°C
Storage Temperature Range, T_{stg}	-55° to +175°C
Lead Temperature (During Soldering, 1.6mm from case for 10sec), T_L	+300°C
Mounting Torque (6-32 or M3 Screw)	10 lbf•in (1.1N•m)
Thermal Resistance, Junction-to-Case, R_{thJC}	0.50°C/W
Thermal Resistance, Junction-to-Ambient, R_{thJA}	40°C/W
Typical Thermal Resistance, Case-to-Sink (Flat, Greased Surface), R_{thCS}	0.24°C/W

Note 1. Repetitive rating; pulse width limited by maximum junction temperature.

Note 2. Starting $T_J = +25^\circ C$, $L = 1.5mH$, $R_G = 25\Omega$, $I_{AS} = 28A$

Note 3. $I_{SD} \leq 28A$, $di/dt \leq 486A/\mu s$, $V_{DD} \leq V_{(BR)DSS}$, $T_J \leq +175^\circ C$

Electrical Characteristics: ($T_J = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-to-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = 250\pm A$	200	-	-	V
Breakdown Voltage Temp. Coefficient	$\frac{V_{(BR)DSS}}{T_J}$	Reference to $+25^\circ\text{C}$, $I_D = 1\text{mA}$	-	0.26	-	$V/^\circ\text{C}$
Static Drain-to-Source On-Resistance	$R_{DS(on)}$	$V_{GS} = 10V, I_D = 28A$, Note 4	-	-	0.04	Ω
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	2.0	-	4.0	V
Forward Transconductance	g_{fs}	$V_{DS} = 50V, I_D = 28A$	27	-	-	mhos
Drain-to-Source Leakage Current	I_{DSS}	$V_{DS} = 200V, V_{GS} = 0V$	-	-	25	μA
		$V_{DS} = 160V, V_{GS} = 0V, T_J = +150^\circ\text{C}$	-	-	250	μA
Gate-to-Source Forward Leakage	I_{GSS}	$V_{GS} = 20V$	-	-	100	nA
Gate-to-Source Reverse Leakage	I_{GSS}	$V_{GS} = -20V$	-	-	-100	nA
Total Gate Charge	Q_g	$I_D = 28A, V_{DS} = 160V, V_{GS} = 10V$, Note 4	-	-	234	nC
Gate-to-Source Charge	Q_{gs}		-	-	38	nC
Gate-to-Drain ("Miller") Charge	Q_{gd}		-	-	110	nC
Turn-On Delay Time	$t_{d(on)}$	$V_{DD} = 100V, I_D = 28A, R_G = 1.8\Omega$, $V_{GS} = 10V$, Note 4	-	17	-	ns
Rise Time	t_r		-	60	-	ns
Turn-Off Delay Time	$t_{d(off)}$		-	55	-	ns
Fall Time	t_f		-	48	-	ns
Internal Drain Inductance	L_D	Between lead, .250in. (6.0) mm from package and center of die contact	-	5.0	-	nH
Internal Source Inductance	L_S		-	13	-	nH
Input Capacitance	C_{iss}	$V_{GS} = 0V, V_{DS} = 25V, f = 1\text{MHz}$	-	4057	-	pF
Output Capacitance	C_{oss}		-	603	-	pF
Reverse Transfer Capacitance	C_{riss}		-	161	-	pF

Note 4. Pulse width $\leq 400\mu\text{s}$; duty cycle $\leq 2\%$.


Source-Drain Ratings and Characteristics:

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Continuous Source Current (Body Diode)	I_S	Note 5	-	-	50	A
Pulsed Source Current (Body Diode)	I_{SM}	Note 1	-	-	200	A
Diode Forward Voltage	V_{SD}	$T_J = +25^\circ\text{C}, I_S = 28A, V_{GS} = 0V$, Note 4	-	-	1.3	V
Reverse Recovery Time	t_{rr}	$T_J = +25^\circ\text{C}, I_F = 28A$, $di/dt = 100A/\mu\text{s}$, Note 4	-	268	402	ns
Reverse Recovery Charge	Q_{rr}		-	1.9	2.8	μC
Forward Turn-On Time	t_{on}	Intrinsic turn-on time is negligible (turn-on is dominated by $L_S + L_D$)				

Note 1. Repetitive rating; pulse width limited by maximum junction temperature.

Note 4. Pulse width $\leq 400\mu\text{s}$; duty cycle $\leq 2\%$.

Note 5. Calculated continuous current based on maximum allowable junction temperature.

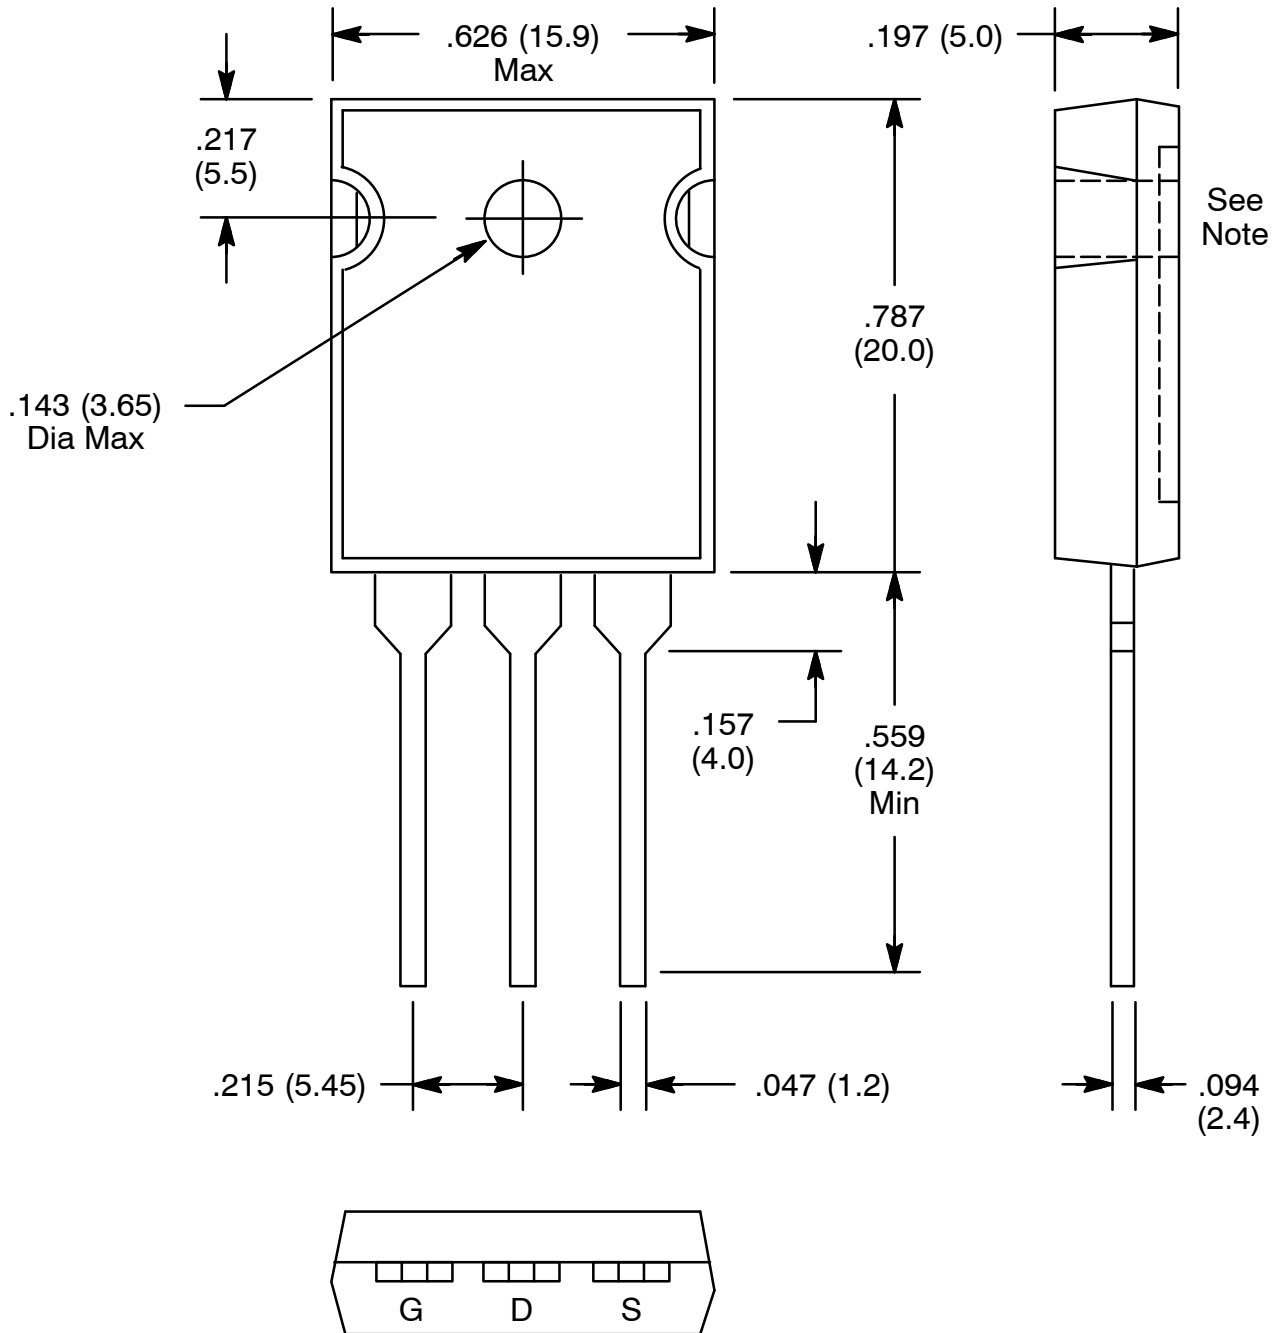

Note: Drain connected to metal part of mounting surface.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [NTE](#) manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [MCH3443-TL-E](#) [MCH6422-TL-E](#) [FDPF9N50NZ](#) [FW216A-TL-2W](#) [FW231A-TL-E](#) [APT5010JVR](#) [NTNS3A92PZT5G](#)
[IRF100S201](#) [JANTX2N5237](#) [2SK2464-TL-E](#) [2SK3818-DL-E](#) [FCA20N60_F109](#) [FDZ595PZ](#) [STD6600NT4G](#) [FSS804-TL-E](#) [2SJ277-DL-E](#)
[2SK1691-DL-E](#) [2SK2545\(Q,T\)](#) [405094E](#) [423220D](#) [MCH6646-TL-E](#) [TPCC8103,L1Q\(CM](#) [367-8430-0972-503](#) [VN1206L](#) [424134F](#)
[026935X](#) [051075F](#) [SBVS138LT1G](#) [614234A](#) [715780A](#) [NTNS3166NZT5G](#) [751625C](#) [873612G](#) [IRF7380TRHR](#) [IPS70R2K0CEAKMA1](#)
[RJK60S3DPP-E0#T2](#) [RJK60S5DPK-M0#T0](#) [APT5010JVFR](#) [APT12031JFLL](#) [APT12040JVR](#) [DMN3404LQ-7](#) [NTE6400](#) [JANTX2N6796U](#)
[JANTX2N6784U](#) [JANTXV2N5416U4](#) [SQM110N05-06L-GE3](#) [SIHF35N60E-GE3](#) [2SK2614\(TE16L1,Q\)](#)