


**NTE2927**  
**MOSFET**  
**N-Ch, Enhancement Mode**  
**High Speed Switch**  
**TO-220 Full Pack Type Package**

**Features:**

- Low Drain-Source ON Resistance:  $R_{DS(ON)} = 0.58\Omega$  Typ.
- High Forward Transfer Admittance:  $|Y_{fs}| = 6.0$  S Typ.
- Low Leakage Current:  $I_{DSS} = 10\mu A$  Max. ( $V_{DS} = 600V$ )
- Enhancement-Model:  $V_{th} = 2.0V$  to  $4.0V$  ( $V_{DS} = 10V$ ,  $I_D = 1mA$ )

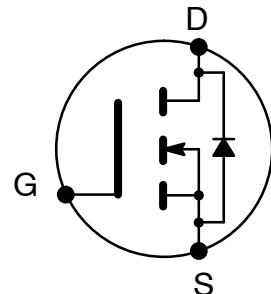

**Absolute Maximum Ratings:** ( $T_A = +25^\circ C$ , Note 1 unless otherwise specified)

Drain-Source Voltage, $V_{DSS}$ .....	600V
Gate-Source Voltage, $V_{GSS}$ .....	$\pm 30$
Drain Current (Note 2), $I_D$	
DC .....	10A
Pulsed .....	40A
Drain Power Dissipation ( $T_C = +25^\circ C$ ), $P_D$ .....	45W
Single Pulse Avalanche Energy (Note 3), $E_{AS}$ .....	363mJ
Avalanche Current, $I_{AR}$ .....	10A
Repetitive Avalanche Energy (Note 4), $E_{AR}$ .....	4.5mJ
Channel Temperature, $T_{ch}$ .....	+150°C
Storage Temperature Range, $T_{stg}$ .....	-55° to +150°C
Thermal Resistance, Channel-to-Case, $R_{thCH-C}$ .....	2.78°C/W
Thermal Resistance, Channel-to-Ambient, $R_{thCH-A}$ .....	62.5°C/W

Note 1. Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc. may cause this device to decrease in reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the Absolute Maximum Ratings. This transistor is an electrostatic sensitive device. Please handle with caution.

Note 2. Make sure that the device channel temperature is below +150°C.

Note 3.  $V_{DD} = 90V$ ,  $T_{ch} = +25^\circ C$  (Initial),  $L = 6.36mH$ ,  $R_G = 25\Omega$ ,  $I_{AR} = 10A$

Note 4. Repetitive rating; pulse width limited by maximum channel temperature.



**Electrical Characteristics:** ( $T_A = +25^\circ\text{C}$  unless otherwise specified)


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Gate Leakage Current	$I_{GSS}$	$V_{GS} = \pm 30\text{V}$ , $V_{DS} = 0\text{V}$	–	–	$\pm 1$	$\mu\text{A}$
Drain Cut-Off Current	$I_{DSS}$	$V_{DS} = 600\text{V}$ , $V_{GS} = 0\text{V}$	–	–	10	$\mu\text{A}$
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0\text{V}$ , $I_D = 10\text{mA}$	600	–	–	V
Gate Threshold Voltage	$V_{th}$	$V_{DS} = 10\text{V}$ , $I_D = 1\text{mA}$	2.0	–	4.0	V
Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS} = 10\text{V}$ , $I_D = 5\text{A}$	–	0.58	0.75	$\Omega$
Forward Transfer Admittance	$ Y_{fs} $	$V_{DS} = 10\text{V}$ , $I_D = 5\text{A}$	1.5	6.0	–	S
Input Capacitance	$C_{iss}$	$V_{GS} = 0\text{V}$ , $V_{DS} = 25\text{V}$ , $f = 1\text{MHz}$	–	1350	–	pF
Output Capacitance	$C_{oss}$		–	135	–	pF
Reverse Transfer Capacitance	$C_{rss}$		–	6	–	pF
Turn-On Delay Time	$t_{d(on)}$	$V_{DD} = 200\text{V}$ , $I_D = 5\text{A}$ , $R_L = 40\Omega$ , Note 5	–	55	–	ns
Rise Time	$t_r$		–	22	–	ns
Turn-Off Delay Time	$t_{d(off)}$		–	100	–	ns
Fall Time	$t_f$		–	15	–	ns
Total Gate Charge	$Q_g$	$I_D = 10\text{A}$ , $V_{DS} = 400\text{V}$ , $V_{GS} = 10\text{V}$	–	25	–	nC
Gate-to-Source Charge	$Q_{gs}$		–	16	–	nC
Gate-to-Drain ("Miller") Charge	$Q_{gd}$		–	9	–	nC

Note 5. Duty Cycle  $\leq 1\%$ ,  $t_w = 10\mu\text{s}$ .

**Source-Drain Ratings and Characteristics:** ( $T_A = +25^\circ\text{C}$  unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Continuous Drain Reverse Current	$I_{DR}$	Note 2	–	–	10	A
Pulsed Drain Reverse Current	$I_{DRP}$	Note 2	–	–	40	A
Diode Forward Voltage	$V_{DSF}$	$I_{DR} = 10\text{A}$ , $V_{GS} = 0\text{V}$	–	–	-1.7	V
Reverse Recovery Time	$t_{rr}$	$I_{DR} = 10\text{A}$ , $V_{GS} = 0\text{V}$ , $dI_{DR}/dt = 100\text{A}/\mu\text{s}$	–	1300	–	ns
Reverse Recovery Charge	$Q_{rr}$		–	12	–	$\mu\text{C}$

Note 2. Make sure that the device channel temperature is below  $+150^\circ\text{C}$ .

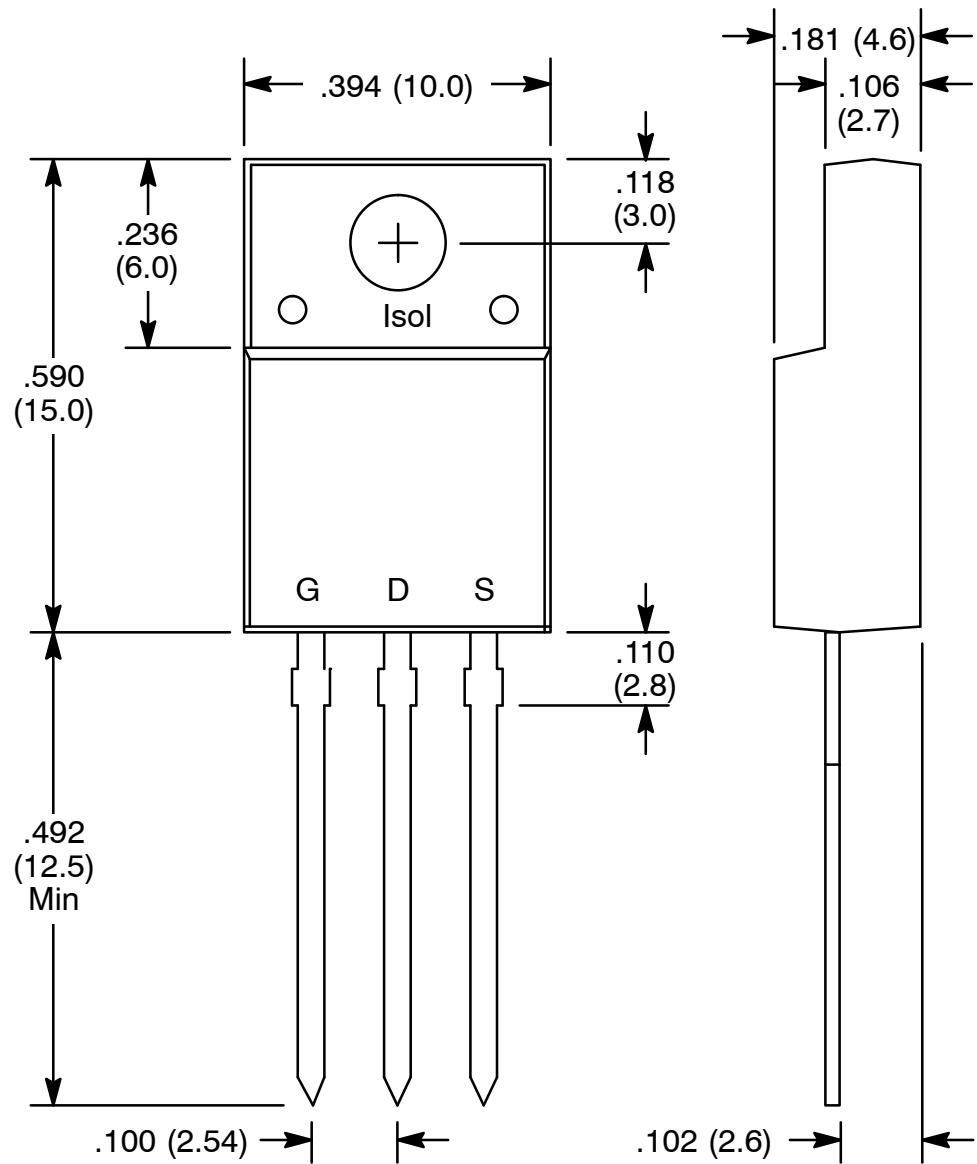

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for MOSFET category:***

***Click to view products by NTE manufacturer:***

Other Similar products are found below :

[614233C](#) [648584F](#) [MCH3443-TL-E](#) [MCH6422-TL-E](#) [FDPF9N50NZ](#) [FW216A-TL-2W](#) [FW231A-TL-E](#) [APT5010JVR](#) [NTNS3A92PZT5G](#)  
[IRF100S201](#) [JANTX2N5237](#) [2SK2464-TL-E](#) [2SK3818-DL-E](#) [FCA20N60\\_F109](#) [FDZ595PZ](#) [STD6600NT4G](#) [FSS804-TL-E](#) [2SJ277-DL-E](#)  
[2SK1691-DL-E](#) [2SK2545\(Q,T\)](#) [405094E](#) [423220D](#) [MCH6646-TL-E](#) [TPCC8103,L1Q\(CM](#) [367-8430-0972-503](#) [VN1206L](#) [424134F](#)  
[026935X](#) [051075F](#) [SBVS138LT1G](#) [614234A](#) [715780A](#) [NTNS3166NZT5G](#) [751625C](#) [873612G](#) [IRF7380TRHR](#) [IPS70R2K0CEAKMA1](#)  
[RJK60S3DPP-E0#T2](#) [RJK60S5DPK-M0#T0](#) [APT5010JVFR](#) [APT12031JFLL](#) [APT12040JVR](#) [DMN3404LQ-7](#) [NTE6400](#) [JANTX2N6796U](#)  
[JANTX2N6784U](#) [JANTXV2N5416U4](#) [SQM110N05-06L-GE3](#) [SIHF35N60E-GE3](#) [2SK2614\(TE16L1,Q\)](#)