




ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089
<http://www.nteinc.com>

NTE2930 MOSFET N-Channel, Enhancement Mode High Speed Switch TO3PML Type Package

Features:

- Avalanche Rugged Technology
- Rugged Gate Oxide Technology
- Lower Input Capacitance
- Improved Gate Charge
- Extended Safe Operating Area
- Lower $R_{DS(on)}$: $0.032 \leq$ Typ
- Lower Leakage Current: 10° A (Max) @ $V_{DS} = 100V$



Absolute Maximum Ratings:

Drain-to-Source Voltage, V_{DSS}	100V
Drain Current, I_D	
Continuous	
$T_C = +25^{\circ}C$	31A
$T_C = +100^{\circ}C$	21.9A
Pulsed (Note 1)	170A
Total Power Dissipation ($T_C = +25^{\circ}C$), P_D	100W
Derate Above $25^{\circ}C$	0.67W/ $^{\circ}C$
Gate-Source Voltage, V_{GS}	$\pm 20V$
Single Pulsed Avalanche Energy (Note 2), E_{AS}	641mJ
Avalanche Current (Note 1), I_{AR}	31A
Repetitive Avalanche Energy (Note 1), E_{AR}	10mJ
Peak Diode Recovery dv/dt (Note 3), dv/dt	6.5V/ns
Operating Junction Temperature Range, T_J	-55° to $+175^{\circ}C$
Storage Temperature Range, T_{stg}	-55° to $+175^{\circ}C$
Maximum Lead Temperature (During Soldering, 1/8" from case, 5sec), T_L	$+300^{\circ}C$
Thermal Resistance, Junction-to-Case, R_{thJC}	1.5 $^{\circ}C/W$
Thermal Resistance, Junction-to-Ambient, R_{thJA}	40 $^{\circ}C/W$

Note 1. Repetitive Rating: Pulse width limited by maximum junction temperature.

Note 2. $L = 1mH$, $I_{AS} = 31A$, $V_{DD} = 25V$, $R_G = 27 \leq$, Starting $T_J = +25^{\circ}C$.

Note 3. $I_{SD} \leq 40A$, $di/dt \leq 470A/^\circ s$, $V_{DD} \leq V_{(BR)DSS}$, Starting $T_J = +25^\circ C$.


Electrical Characteristics: ($T_C = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain–Source Breakdown Voltage	BV_{DSS}	$V_{GS} = 0V, I_D = 250^\circ\text{A}$	100	–	–	V
Breakdown Voltage Temperature Coefficient	$\pm V_{(BR)DSS} / \pm T_J$	$I_D = 250^\circ\text{A}$	–	0.11	–	V/°C
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = 5V, I_D = 250^\circ\text{A}$	2.0	–	4.0	V
Gate–Source Leakage Forward	I_{GSS}	$V_{GS} = 10V$	–	–	100	nA
Gate–Source Leakage Reverse	I_{GSS}	$V_{GS} = -10V$	–	–	-100	nA
Drain–to–Source Leakage Current	I_{DSS}	$V_{DS} = 100V$	–	–	10	°A
		$V_{DS} = 80V, T_C = +150^\circ\text{C}$	–	–	100	°A
Static Drain–Source ON Resistance	$R_{DS(on)}$	$V_{GS} = 10V, I_D = 15.5A, \text{Note 4}$	–	–	0.04	≤
Forward Transconductance	g_{fs}	$V_{DS} = 40V, I_D = 15.5A, \text{Note 4}$	–	27.3	–	mhos
Input Capacitance	C_{iss}	$V_{GS} = 0V, V_{DS} = 25V, f = 1\text{MHz}$	–	1750	2270	pF
Output Capacitance	C_{oss}		–	420	485	pF
Reverse Transfer Capacitance	C_{rss}		–	185	215	pF
Turn–On Delay Time	$t_{d(on)}$	$V_{DD} = 50V, I_D = 40A, R_G = 6.2\leq, \text{Note 4, Note 5}$	–	17	50	ns
Rise Time	t_r		–	20	50	ns
Turn–Off Delay Time	$t_{d(off)}$		–	80	160	ns
Fall Time	t_f		–	45	100	ns
Total Gate Charge	Q_g	$V_{GS} = 10V, I_D = 40A, V_{DS} = 80V, \text{Note 4, Note 5}$	–	75	97	nC
Gate–Source Charge	Q_{gs}		–	13.2	–	nC
Gate–Drain (“Miller”) Charge	Q_{gd}		–	34.8	–	nC
Source–Drain Diode Ratings and Characteristics						
Continuous Source Current	I_S	(Body Diode)	–	–	31	A
Pulse Source Current	I_{SM}	(Body Diode) Note 1	–	–	170	A
Diode Forward Voltage	V_{SD}	$T_J = +25^\circ\text{C}, I_S = 31A, V_{GS} = 0V, \text{Note 4}$	–	–	1.6	V
Reverse Recovery Time	t_{rr}	$T_J = +25^\circ\text{C}, I_F = 40A, di_F/dt = 100A/^\circ\text{s}, \text{Note 4}$	–	135	–	ns
Reverse Recovery Charge	Q_{rr}		–	0.65	–	°C

Note 1. Repetitive Rating: Pulse width limited by maximum junction temperature.

Note 4. Pulse Test: Pulse Width = 250° s, Duty Cycle ≤ 2%.

Note 5. Essentially independent of operating temperature.

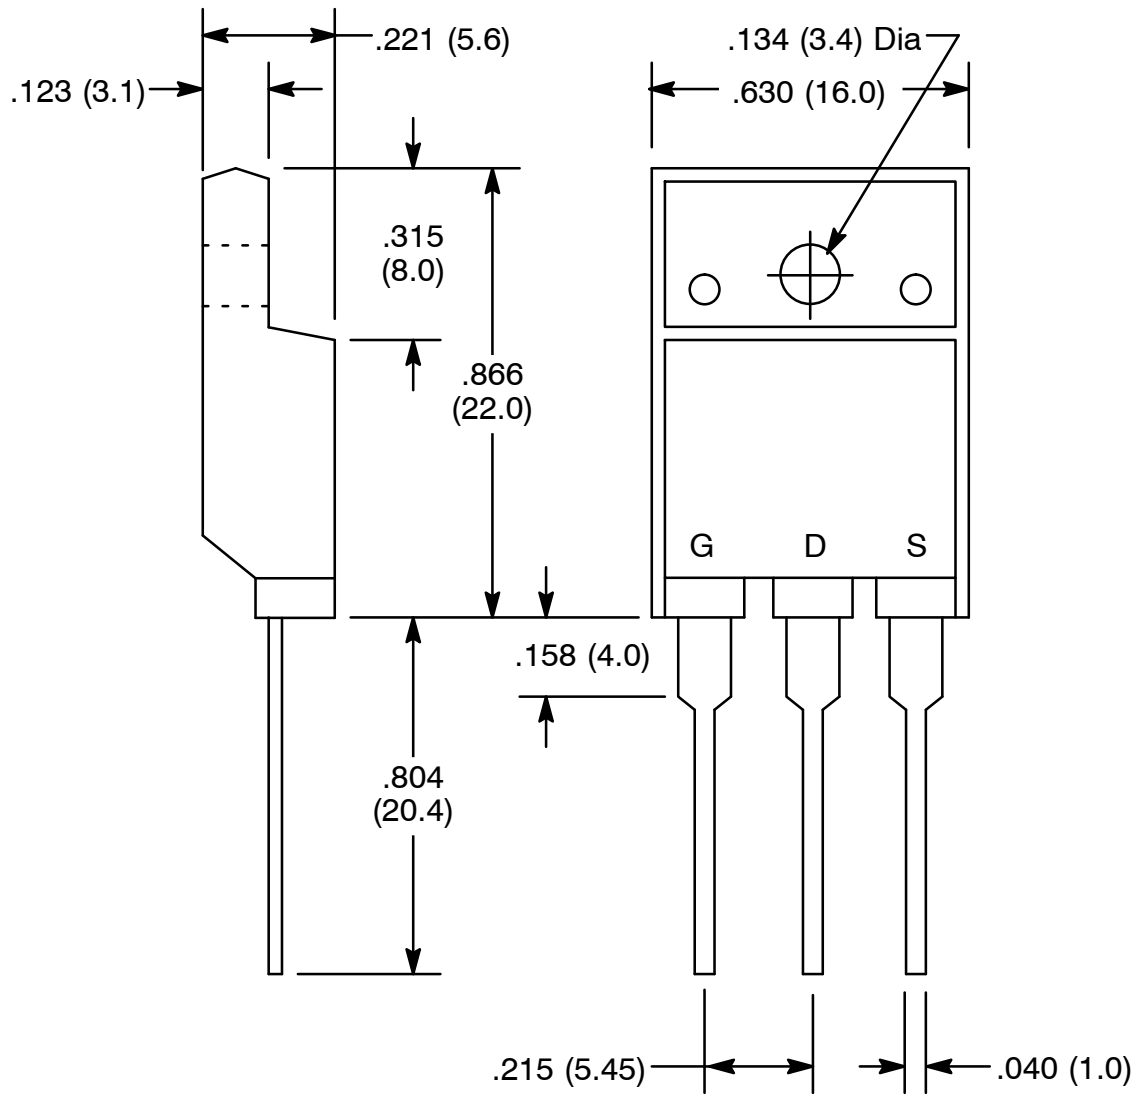

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [NTE](#) manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [MCH3443-TL-E](#) [MCH6422-TL-E](#) [FDPF9N50NZ](#) [FW216A-TL-2W](#) [FW231A-TL-E](#) [APT5010JVR](#) [NTNS3A92PZT5G](#)
[IRF100S201](#) [JANTX2N5237](#) [2SK2464-TL-E](#) [2SK3818-DL-E](#) [FCA20N60_F109](#) [FDZ595PZ](#) [STD6600NT4G](#) [FSS804-TL-E](#) [2SJ277-DL-E](#)
[2SK1691-DL-E](#) [2SK2545\(Q,T\)](#) [405094E](#) [423220D](#) [MCH6646-TL-E](#) [TPCC8103,L1Q\(CM](#) [367-8430-0972-503](#) [VN1206L](#) [424134F](#)
[026935X](#) [051075F](#) [SBVS138LT1G](#) [614234A](#) [715780A](#) [NTNS3166NZT5G](#) [751625C](#) [873612G](#) [IRF7380TRHR](#) [IPS70R2K0CEAKMA1](#)
[RJK60S3DPP-E0#T2](#) [RJK60S5DPK-M0#T0](#) [APT5010JVFR](#) [APT12031JFLL](#) [APT12040JVR](#) [DMN3404LQ-7](#) [NTE6400](#) [JANTX2N6796U](#)
[JANTX2N6784U](#) [JANTXV2N5416U4](#) [SQM110N05-06L-GE3](#) [SIHF35N60E-GE3](#) [2SK2614\(TE16L1,Q\)](#)