




ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089
<http://www.nteinc.com>

NTE2991 MOSFET N-Channel, Enhancement Mode High Speed Switch TO220 Type Package

Features:

- Ultra Low On-Resistance
- Dynamic dv/dt Rating
- +175°C Operating Temperature
- Fast Switching
- Fully Avalanche Rated

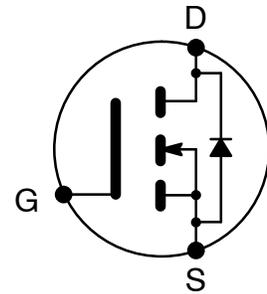

Absolute Maximum Ratings:

Drain Current, I_D	
Continuous ($V_{GS} = 10V$)	
$T_C = +25^\circ C$ (Note 1)	110A
$T_C = +100^\circ C$	80A
Pulsed (Note 2)	390A
Total Power Dissipation ($T_C = +25^\circ C$), P_D	200W
Derate Above $25^\circ C$	1.3W/ $^\circ C$
Gate-Source Voltage, V_{GS}	$\pm 20V$
Single Pulsed Avalanche Energy ($I_{AS} = 62A$, $L = 138\mu H$, Note 3), E_{AS}	264mJ
Avalanche Current (Note 2), I_{AR}	62A
Repetitive Avalanche Energy (Note 2), E_{AR}	20mJ
Peak Diode Recovery dv/dt (Note 4), dv/dt	5.0V/ns
Operating Junction Temperature Range, T_J	-55° to $+175^\circ C$
Storage Temperature Range, T_{stg}	-55° to $+175^\circ C$
Maximum Lead Temperature (During Soldering, 1.6mm from case, 10sec), T_L	$+300^\circ C$
Maximum Thermal Resistance:	
Junction-to-Case, R_{thJC}	0.75 $^\circ C/W$
Junction-to-Ambient, R_{thJA}	62 $^\circ C/W$
Typical Thermal Resistance, Case-to-Sink (Flat, greased surface), R_{thCS}	0.50 $^\circ C/W$

Note 1. Calculated continuous current based on maximum allowable junction temperature. Package limitation current is 75A.

Note 2. Repetitive Rating: Pulse width limited by maximum junction temperature.

Note 3. This is a calculated value limited to $T_J = +175^\circ C$.



Note 4. $I_{SD} \leq 62A$, $di/dt \leq 207A/\mu s$, $V_{DD} \leq V_{(BR)DSS}$, $T_J \leq +175^\circ C$.

Electrical Characteristics: ($T_J = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain–Source Breakdown Voltage	BV_{DSS}	$V_{GS} = 0V, I_D = 250\mu A$	55	–	–	V
Breakdown Voltage Temperature Coefficient	$\Delta V_{(BR)DSS} / \Delta T_J$	Reference to $+25^\circ\text{C}$, $I_D = 1\text{mA}$	–	0.057	–	$V/^\circ\text{C}$
Static Drain–Source ON Resistance	$R_{DS(on)}$	$V_{GS} = 10V, I_D = 62A$, Note 5	–	–	8.0	$m\Omega$
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	2.0	–	4.0	V
Forward Transconductance	g_{fs}	$V_{DS} = 25V, I_D = 62A$, Note 5	44	–	–	mhos
Drain–to–Source Leakage Current	I_{DSS}	$V_{DS} = 55V, V_{GS} = 0$	–	–	25	μA
		$V_{DS} = 44V, V_{GS} = 0V, T_C = +150^\circ\text{C}$	–	–	250	μA
Gate–Source Leakage Forward	I_{GSS}	$V_{GS} = 20V$	–	–	100	nA
Gate–Source Leakage Reverse	I_{GSS}	$V_{GS} = -20V$	–	–	-100	nA
Total Gate Charge	Q_g	$V_{GS} = 10V, I_D = 62A, V_{DS} = 44V$	–	–	146	nC
Gate–Source Charge	Q_{gs}		–	–	35	nC
Gate–Drain (“Miller”) Charge	Q_{gd}		–	–	54	nC
Turn–On Delay Time	$t_{d(on)}$	$V_{DD} = 28V, I_D = 62A, R_G = 4.5\Omega, V_{GS} = 10V$, Note 5	–	14	–	ns
Rise Time	t_r		–	101	–	ns
Turn–Off Delay Time	$t_{d(off)}$		–	50	–	ns
Fall Time	t_f		–	65	–	ns
Internal Drain Inductance	L_D	Between lead, 6mm (0.25”) from package and center of die contact	–	4.5	–	nH
Internal Source Inductance	L_S		–	7.5	–	nH
Input Capacitance	C_{iss}	$V_{GS} = 0V, V_{DS} = 25V, f = 1\text{MHz}$	–	3247	–	pF
Output Capacitance	C_{oss}		–	781	–	pF
Reverse Transfer Capacitance	C_{rss}		–	211	–	pF
Source–Drain Diode Ratings and Characteristics						
Continuous Source Current	I_S	(Body Diode)	–	–	110	A
Pulse Source Current	I_{SM}	(Body Diode) Note 2	–	–	390	A
Diode Forward Voltage	V_{SD}	$T_J = +25^\circ\text{C}, I_S = 62A, V_{GS} = 0V$, Note 5	–	–	1.3	V
Reverse Recovery Time	t_{rr}	$T_J = +25^\circ\text{C}, I_F = 62A, di/dt = 100A/\mu s$, Note 5	–	69	104	ns
Reverse Recovery Charge	Q_{rr}		–	143	215	μC
Forward Turn–On Time	t_{on}	Intrinsic turn–on time is negligible (turn–on is dominated by $L_S + L_D$)				

Note 2. Repetitive Rating: Pulse width limited by maximum junction temperature.

Note 5. Pulse Width $\leq 400\mu s$, Duty Cycle $\leq 2\%$.

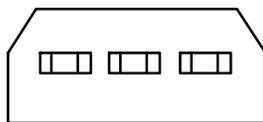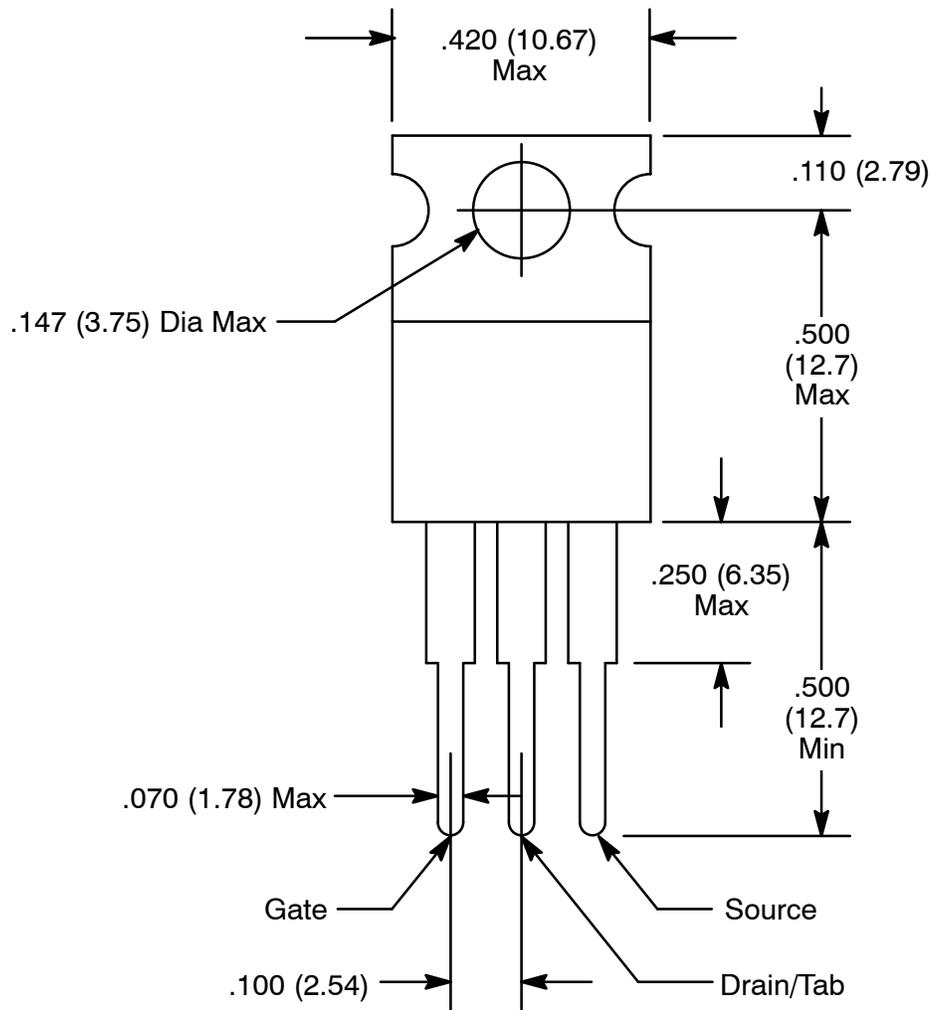

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [NTE](#) manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [MCH3443-TL-E](#) [MCH6422-TL-E](#) [FDPF9N50NZ](#) [FW216A-TL-2W](#) [FW231A-TL-E](#) [APT5010JVR](#) [NTNS3A92PZT5G](#)
[IRF100S201](#) [JANTX2N5237](#) [2SK2464-TL-E](#) [2SK3818-DL-E](#) [FCA20N60_F109](#) [FDZ595PZ](#) [STD6600NT4G](#) [FSS804-TL-E](#) [2SJ277-DL-E](#)
[2SK1691-DL-E](#) [2SK2545\(Q,T\)](#) [405094E](#) [423220D](#) [MCH6646-TL-E](#) [TPCC8103,L1Q\(CM](#) [367-8430-0972-503](#) [VN1206L](#) [424134F](#)
[026935X](#) [051075F](#) [SBVS138LT1G](#) [614234A](#) [715780A](#) [NTNS3166NZT5G](#) [751625C](#) [873612G](#) [IRF7380TRHR](#) [IPS70R2K0CEAKMA1](#)
[RJK60S3DPP-E0#T2](#) [RJK60S5DPK-M0#T0](#) [APT5010JVFR](#) [APT12031JFLL](#) [APT12040JVR](#) [DMN3404LQ-7](#) [NTE6400](#) [JANTX2N6796U](#)
[JANTX2N6784U](#) [JANTXV2N5416U4](#) [SQM110N05-06L-GE3](#) [SIHF35N60E-GE3](#) [2SK2614\(TE16L1,Q\)](#)