



ELECTRONICS, INC.  
44 FARRAND STREET  
BLOOMFIELD, NJ 07003  
(973) 748-5089  
<http://www.nteinc.com>

## NTE3017 Infrared Emitting Diode High Speed for Remote Control

### Description:

The NTE3017 is an infrared emitting diode in standard GaAs on GaAs technology, molded in a clear, blue-grey tinted plastic T-1 3/4 (5mm) package.

### Features:

- Low Forward Voltage
- High Radiant Power and Radiant Intensity
- Suitable for DC and High Pulse Current Operation
- High Reliability
- Standard T-1 3/4 (5mm) Package

### Applications:


Infrared remote control and free air transmission systems with low forward voltage and comfortable radiation and angle requirements in combination with PIN photodiodes or phototransistors.

### Absolute Maximum Ratings: ( $T_A = +25^\circ\text{C}$ unless otherwise specified)

Reverse Voltage, $V_R$ .....	5V
Forward Current, $I_F$	
Continuous .....	150mA
Peak ( $t_p = 100\mu\text{s}$ , $t_p/T = 0.5$ ) .....	300mA
Surge Forward Current ( $t_p = 100\mu\text{s}$ ), $I_{FSM}$ .....	2.5A
Power Dissipation, $P_D$ .....	210mW
Junction Temperature, $T_J$ .....	+100°C
Operating Temperature Range, $T_{opr}$ .....	-55° to +100°C
Storage Temperature Range, $T_{stg}$ .....	-55° to +100°C
Lead Soldering Temperature ( $t \leq 5\text{sec}$ , 2mm from case), $T_L$ .....	+260°C
Thermal Resistance, Junction-to-Ambient, $R_{thJA}$ .....	375K/W

**Electrical Characteristics:** ( $T_A = +25^\circ\text{C}$  unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Forward Voltage	$V_F$	$I_F = 100\text{mA}, t_p = 20\text{ms}$	-	1.3	1.7	V
		$I_F = 1.5\text{A}, t_p = 100\mu\text{s}$	-	2.2	2.7	V
Temperature Coefficient of Forward Voltage		$I_F = 100\text{mA}$	-	-1.3	-	$\text{mV}/^\circ\text{C}$
Reverse Current	$I_R$	$V_R = 5\text{V}$	-	-	100	$\mu\text{A}$
Junction Capacitance	$C_j$	$V_R = 0, f = 1\text{MHz}, E = 0$	-	30	-	pF
Radiant Intensity	$I_e$	$I_F = 100\text{mA}, t_p = 20\text{ms}$	15	20	-	$\text{mW}/\text{sr}$
		$I_F = 1.5\text{A}, t_p = 100\mu\text{s}$	120	190	-	$\text{mW}/\text{sr}$
Angle of Half Intensity	$\phi$		-	$\pm 22$	-	deg
Radiant Power	$\Phi_e$	$I_F = 100\text{mA}, t_p = 20\text{ms}$	-	15	-	mW
Temperature Coefficient of Radiant Intensity		$I_F = 20\text{mA}$	-	-0.8	-	$\%/\text{ }^\circ\text{C}$
Peak Wavelength	$\lambda_p$	$I_F = 100\text{mA}$	-	950	-	nm
Temperature Coefficient of Peak Wavelength		$I_F = 100\text{mA}$	-	0.2	-	$\text{nm}/^\circ\text{C}$
Spectral Bandwidth	$\Delta\lambda$	$I_F = 100\text{mA}$	-	50	-	nm
Rise Time	$t_r$	$I_F = 100\text{mA}$	-	800	-	ns
		$I_F = 1.5\text{A}$	-	400	-	ns
Fall Time	$t_f$	$I_F = 100\text{mA}$	-	800	-	ns
		$I_F = 1.5\text{A}$	-	400	-	ns

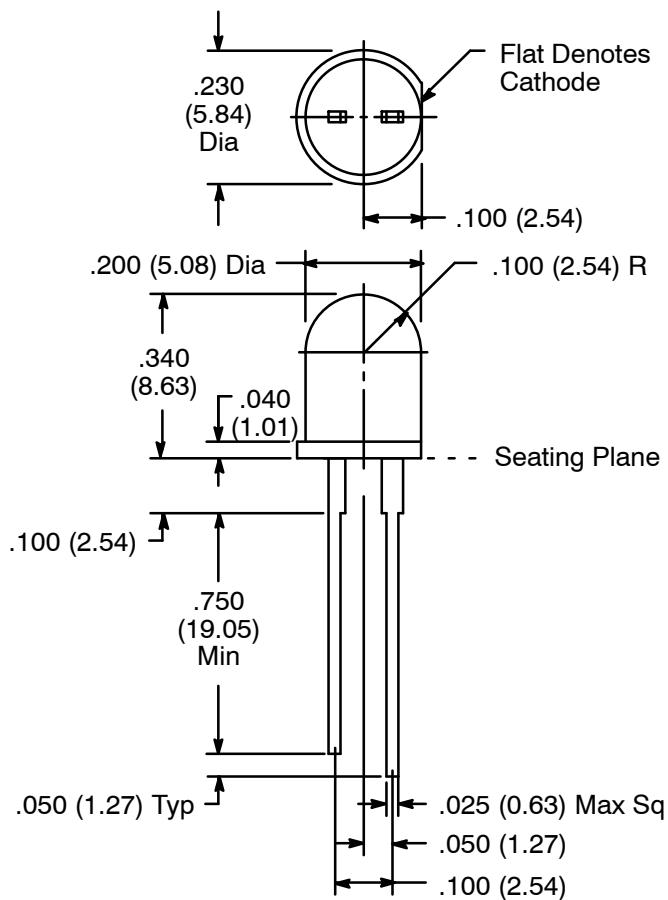

Tolerance  $\pm .010$  (.254)

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for NTE manufacturer:***

Other Similar products are found below :

[02-LDR1](#) [02-LDR12](#) [02-LDR13](#) [02-LDR14](#) [02-LDR15](#) [02-LDR2](#) [02-LDR20](#) [02-LDR21](#) [02-LDR22](#) [02-LDR23](#) [02-LDR3](#) [02-LDR4](#) [02-N101-1](#) [02-N103-1](#) [04-04180](#) [04-06100SS](#) [04-ACC10](#) [04-ACC20](#) [04-ACC30](#) [04-ACC40](#) [04-CCL3129](#) [04-CW07-50](#) [04-CW14-50](#) [04-ES-1000](#) [04-ESNF1000-10](#) [04-ESNF-1000L](#) [04-ESNF-250L](#) [04-ESNF-375L](#) [04-MP10009](#) [04-SCBW19L-GR](#) [04-SCBW25L-BK](#) [04-SCBW25L-GR](#) [04-SCBW25L-WH](#) [04-SCBW32L-BK](#) [04-SCBW32L-GR](#) [04-SCBW32L-OR](#) [04-SCBW32L-WH](#) [04-SCBW50L-GR](#) [04-SCBW50L-OR](#) [04-SCBW6C-GR](#) [04-SCBW6C-OR](#) [04-SCBW6C-WH](#) [04-SCW10C-BK](#) [04-SCW10C-GR](#) [04-SCW10C-OR](#) [04-SCW19L-OR](#) [04-SCW5C-WH](#) [04-SL1.00-G](#) [04-SL1.00-G-10](#) [04-SL1.00-G-5](#)