

NTE4901
Surge Clamping, Overvoltage Transient Suppressor,
Bidirectional

Description:

The NTE4901 is a bidirectional transient voltage suppressor diode in an axial lead type package designed for protecting integrated circuits, MOS, hybrids and other voltage-sensitive semiconductors and components.

Features:

- High Surge Capability
- Very Fast Clamping Time

Absolute Maximum Ratings:

Peak Pulse Power (1ms Exponential Pulse, Initial $T_J = +25^\circ\text{C}$, Note 1), P_P	1.5kW
Power Dissipation ($T_A = +75^\circ\text{C}$, On Infinite heatsink), P_D	5W
Non-Repetitive Surge Peak Forward Current (Initial $T_J = +25^\circ\text{C}$, $t = 10\text{ms}$), I_{FSM}	250A
Operating Junction Temperature, T_J	+175°C
Storage temperature Range, T_{stg}	-65° to +175°C
Lead Temperature (During Soldering, 4mm from case, 10sec max.), T_L	+230°C
Thermal Resistance, Junction-to-Case (On Infinite Heatsink), R_{thJ-C}	20°C/W

Note 1. For surges higher than the maximum value, the diode will present a short-circuit anode-cathode.


Electrical Characteristics: (Note 2, Note 3)

Parameter	Symbol	Test Conditions		Min	Typ	Max	Unit
Stand-Off Voltage	V_{RM}	$I_{RM} = 300\mu\text{A}$		-	-	5	V
Breakdown Voltage	$V_{(BR)}$	$I_R = 1\text{mA}$, Note 4		6	-	-	V
Clamping Voltage	$V_{(CL)}$	1ms expo	$I_{PP} = 1\text{A Max}$	-	-	7.1	V
			$I_{PP} = 10\text{A Max}$	-	-	7.5	V
Peak Pulse Current	I_{PP}	1ms expo		-	-	160	A
		8-20 μs expo		-	-	1340	A
Temperature Coefficient of $V_{(BR)}$				-	-	5.7	$10^{-4}/^\circ\text{C}$
Capacitance	C	$V_R = 0$, $f = 1\text{MHz}$		-	11000	-	pF

Note 2. The NTE4901 is bidirectional device; electrical characteristics apply in both directions.

Note 3. Clamping time (0V o $V_{(BR)}$): $t_{clamping} < 5\text{ns}$.

Note 4. Pulse Test: Pulse Width $\leq 50\text{ms}$, Duty Cycle $< 2\%$.

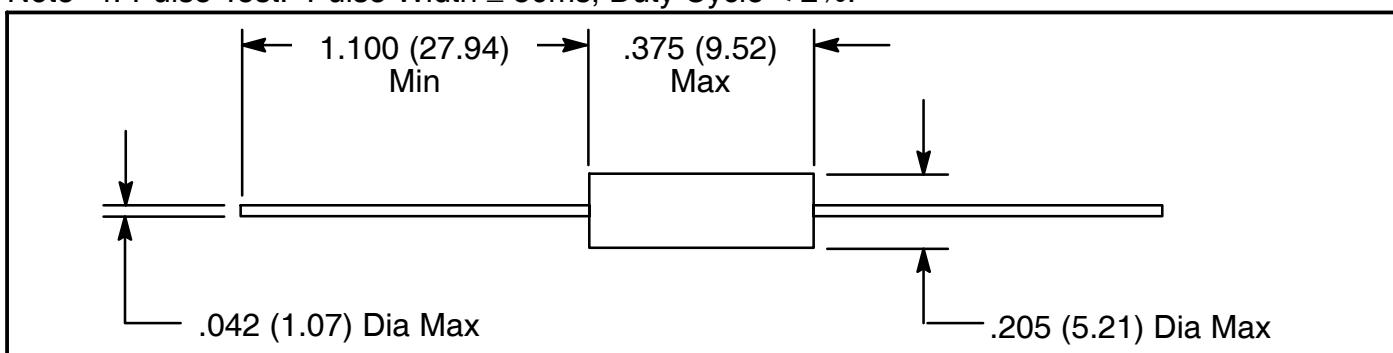

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for ESD Suppressors / TVS Diodes category:

Click to view products by NTE manufacturer:

Other Similar products are found below :

[60KS200C](#) [D12V0H1U2WS-7](#) [D18V0L1B2LP-7B](#) [82356050220](#) [D5V0F4U5P5-7](#) [D5V0M5U6V-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#)
[P6KE39CA-TP](#) [P6KE8.2A](#) [SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ8.0A](#) [SMLJ30CA-TP](#) [ESD101-B1-02ELS](#) [E6327](#) [ESD112-](#)
[B1-02EL](#) [E6327](#) [ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#)
[SCM1293A-04SO](#) [ESD200-B1-CSP0201](#) [E6327](#) [ESD203-B1-02EL](#) [E6327](#) [SM12-7](#) [SMF8.0A-TP](#) [SMLJ45CA-TP](#) [CEN955 W/DATA](#)
[82350120560](#) [82356240030](#) [VESD12A1A-HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDUR24V-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#)
[CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [D1213A-02WL-7](#) [ESDLIN1524BJ-HQ](#) [5KP100A](#)