



ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089
<http://www.nteinc.com>

NTE5892 thru NTE5899 NTE5900 thru NTE5911 Silicon Power Rectifier Diode, 16 Amp, DO4

Description and Features:

The NTE5892 through NTE5911 are low power general purpose rectifier diodes in a DO4 type package designed for battery chargers, converters, power supplies, and machine tool controls.

Features:

- High Surge Current Capability
- High Voltage Available
- Designed for a Wide Range of Applications
- Available in Anode-to-Case or Cathode-to-Case Style

Ratings and Characteristics:

Average Forward Current ($T_C = +140^\circ\text{C Max}$), $I_{F(AV)}$	16A
Maximum Forward Surge Current, I_{FSM}	
50Hz	295A
60Hz	310A
Fusing Current, I^2t	
50Hz	435A ² s
60Hz	395A ² s
Fusing Current, $I^2\sqrt{t}$	6150A ² \sqrt{s}
Maximum Reverse Recovery Voltage Range, V_{RRM}	50 to 1000V

Voltage Ratings: ($T_J = +175^\circ\text{C}$)

NTE Type Number		V_{RRM} -Max Repetitive Peak Reverse Volt. (V)	V_{RSM} -Max Non-Repetitive Peak Reverse Voltage (V)	V_R -Max. Direct Reverse Voltage (V)	$V_{R(SR)}$ Minimum Avalanche Voltage (V)	I_{RM} -Max Reverse Current Rated V_{RRM} (mA)
Cathode to Case	Anode to Case					
5892	5893	50	75	50	-	12
5894	5895	100	150	100	-	12
5896	5897	200	275	200	-	12
5898	5899	300	385	300	-	12
5900	5901	400	500	400	500	12
5902	5903	500	613	50	626	12
5904	5905	600	725	600	750	12
5908	5909	800	950	800	950	12
5910	5911	1000	1200	1000	1150	12


Electrical Specifications:

Parameter	Symbol	Test Conditions		Rating	Unit
Maximum Average Forward Current	$I_F (AV)$	180° sinusoidal condition, $T_C = +140^\circ\text{C}$ Max		16	A
Maximum RMS Forward Current	$I_F (RMS)$			25	A
Maximum Peak One-Cycle Non-Repetitive Surge Current	I_{FSM}	$t = 10\text{ms}$	Sinusoidal Half Wave, No voltage reapplied	295	A
		$t = 8.3\text{ms}$		310	A
		$t = 10\text{ms}$	100% rated voltage reapplied, $T_J = +175^\circ\text{C}$	350	A
		$t = 8.3\text{ms}$		370	A
Maximum I^2t for Individual Device Fusing	I^2t	$t = 10\text{ms}$	100% rated voltage reapplied, Initial $T_J = +175^\circ\text{C}$	612	A^2s
		$t = 8.3\text{ms}$		560	A^2s
Maximum $I^2\sqrt{t}$	$I^2\sqrt{t}$	$t = 0.1$ to 10ms , No voltage reapplied, Note 1		6125	$\text{A}^2\sqrt{t}$
Maximum Peak Forward Voltage	V_{FM}	$I_{FM} = 50\text{A}$, $T_J = +25^\circ\text{C}$		1.23	V
Maximum Value of Threshold Voltage	$V_M (TO)$	$T_J = +175^\circ\text{C}$		0.78	V
Maximum Value of Forward Slope Resistance	r_t	$T_J = +175^\circ\text{C}$		7.55	$\text{m}\Omega$

Note 1. I^2t for time $t_x = I^2\sqrt{t} \cdot \sqrt{t_x}$

Thermal-Mechanical Specifications:

Parameter	Symbol	Test Conditions	Rating	Unit
Maximum Operation Junction Temperature	T_J		-65 to + 175	$^\circ\text{C}$
Maximum Storage Temperature	T_{stg}		-65 to + 200	$^\circ\text{C}$
Maximum Internal Thermal Resistance Junction-to-Case	R_{thJC}	DC operation	1.6	K/W
Thermal Resistance, Case-to-Sink	R_{thCS}	Mounting surface flat, smooth and greased	0.5	K/W
Mounting Torque	T	Non-lubricated threads	1.2 - 1.5 (10.5 - 13.5)	$\text{m}\cdot\text{N}$ ($\text{in}\cdot\text{lb}$)
Approximate Weight	wt		11 (0.25)	g (oz)

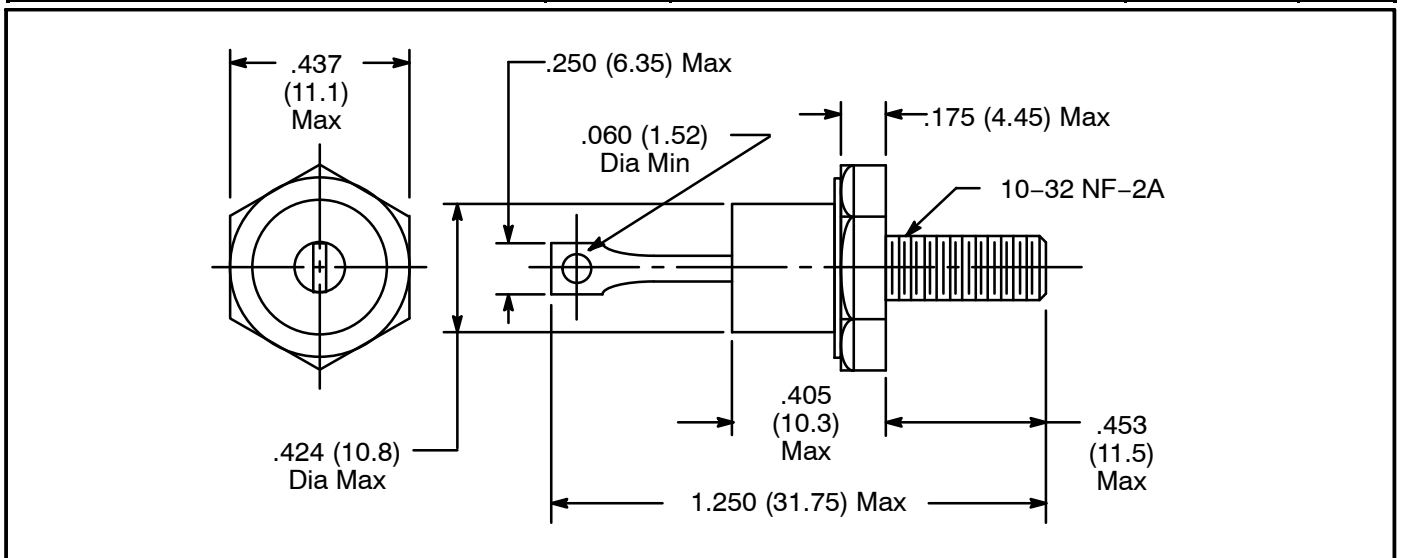

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [nte manufacturer](#):

Other Similar products are found below :

[747](#) [797](#) [868](#) [1724](#) [NEH680M50FE](#) [NEHH1.0M450CB](#) [NTE48](#) [NTE526A](#) [228A](#) [231](#) [954](#) [2023](#) [47-20848-R](#) [510](#) [R04-11A30-120](#) [04-SLPE3750A](#) [5615](#) [591](#) [7056](#) [NTE5710](#) [7448](#) [NEH.10M50AA](#) [NEH2.2M63AA](#) [NEH330M35DD](#) [NEH33M10AA](#) [NEV.22M100AA](#) [TP0006-100](#) [NTE182](#) [NTE528](#) [NTE542](#) [NTE74154](#) [WH20-02-25](#) [04-SCBW25L-BK](#) [04-SCBW32L-BK](#) [04-SCW10C-BK](#) [04-SCBW19L-GR](#) [04-SCW19L-WH](#) [04-SCW19L-OR](#) [04-SCW38L-WH](#) [04-SCBW50L-OR](#) [04-SCBW50L-GR](#) [04-SCW10C-GR](#) [04-SCW10C-OR](#) [04-SCBW32L-GR](#) [04-SCBW32L-WH](#) [04-SCBW32L-OR](#) [04-SCBW6C-WH](#) [04-SCBW6C-GR](#) [04-SCBW6C-OR](#) [04-SCBW25L-GR](#)