



ELECTRONICS, INC.
44 FARRAND STREET
BLOOMFIELD, NJ 07003
(973) 748-5089

NTE6200 thru NTE6210
Positive Center Tapped Silicon Rectifiers
30 Amp(15A per diode)

Features:




- Available in Standard (NTE6200 & NTE6202) and Fast (NTE6206 thru NTE6210) Recovery
- 250 Amps Peak One Half Cycle Surge Current
- Fast Recovery Types: $t_{rr} = 200\text{ns}$ Max
- TO3 Type Package

Absolute Maximum Ratings: ($T_A = +25^\circ\text{C}$ unless otherwise specified)

| | |
|---|----------------------|
| DC Blocking Voltage, V_{RM} | |
| Working Peak Reverse Voltage, V_{DRM} | |
| Peak Repetitive Reverse Voltage, V_{RRM} | |
| NTE6200, NTE6206 | 200V |
| NTE6202, NTE6208 | 400V |
| NTE6210 | 600V |
| RMS Reverse Voltage, $V_{R(RMS)}$ | |
| NTE6200, NTE6206 | 140V |
| NTE6202, NTE6208 | 280V |
| NTE6210 | 420V |
| Peak Surge Current (Per Diode, 1/2 Cycle at 60Hz, (Non-Repetitive), $T_C = +100^\circ\text{C}$), I_{FSM} | 150A |
| Peak Surge Current (Per Diode, 1 sec at 60Hz, $T_C = +100^\circ\text{C}$), I_{FRM} | 50A |
| Average Forward Current (Per Diode, $T_C = +100^\circ\text{C}$), I_O | 15A |
| Fusing Data, I^2T | 85A ² sec |
| Operating Junction Temperature Range, T_j | -65° to +150°C |
| Storage Temperature Range, T_{stg} | -65° to +150°C |
| Maximum Thermal Resistance, Junction-to-Case, R_{thJC} | 1.5°C/W |

Electrical Characteristics: ($T_A = +25^\circ\text{C}$ unless otherwise specified)

| | |
|---|-------|
| Maximum Instantaneous Forward Voltage Drop (Per Diode @ 15A), V_{FM} | 1.4V |
| Maximum Reverse Current (At Rated V_{RM} , $T_C = +100^\circ\text{C}$), I_{RM} | 5mA |
| Maximum Reverse Recovery Time ($I_F = 1\text{A}$, $I_A = 2\text{A}$), t_{rr} | 200ns |

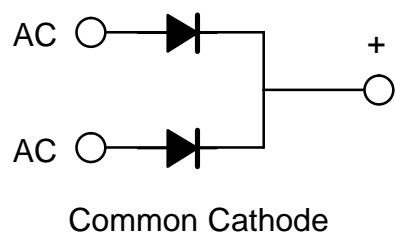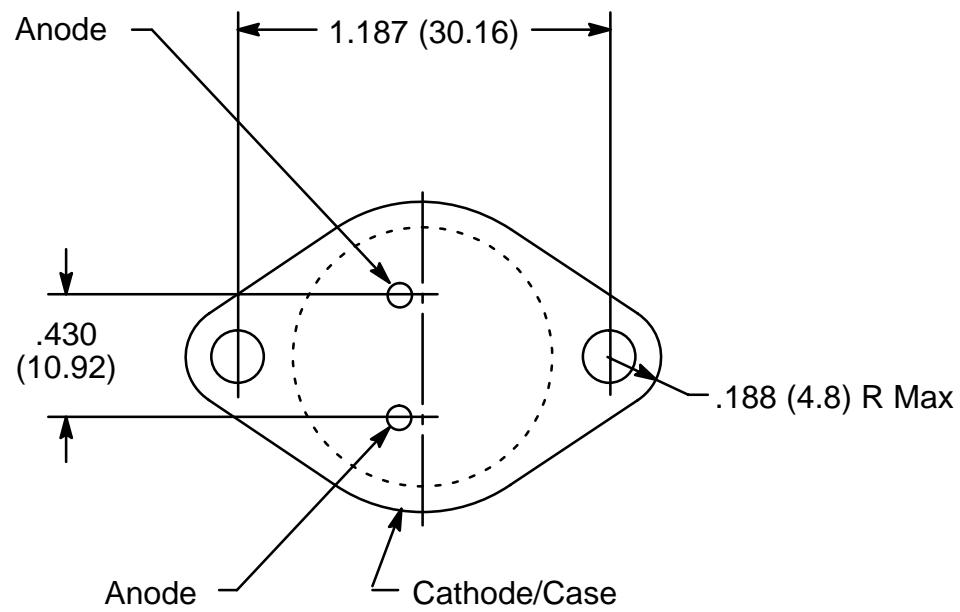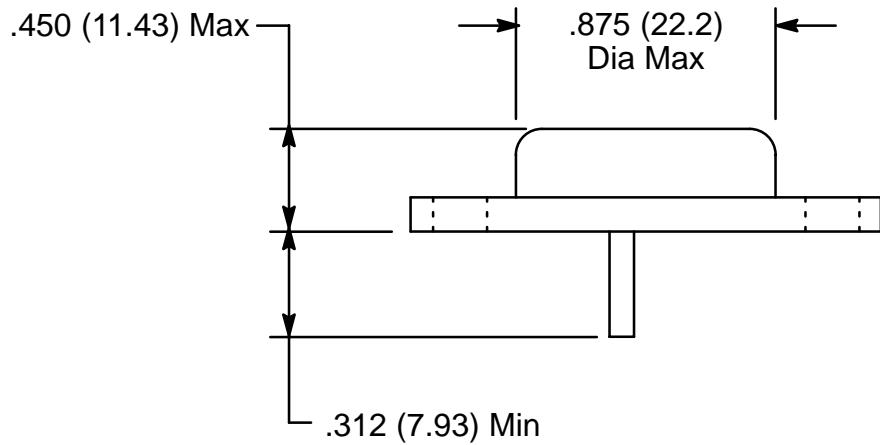

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [nte](#) manufacturer:

Other Similar products are found below :

[747](#) [797](#) [868](#) [1724](#) [NEH680M50FE](#) [NEHH1.0M450CB](#) [NTE48](#) [NTE526A](#) [228A](#) [231](#) [954](#) [2023](#) [47-20848-R](#) [510](#) [R04-11A30-120](#) [04-SLPE3750A](#) [5615](#) [591](#) [7056](#) [NTE5710](#) [7448](#) [NEH.10M50AA](#) [NEH2.2M63AA](#) [NEH330M35DD](#) [NEH33M10AA](#) [NEV.22M100AA](#) [TP0006-100](#) [NTE182](#) [NTE528](#) [NTE542](#) [NTE74154](#) [WH20-02-25](#) [04-SCBW25L-BK](#) [04-SCBW32L-BK](#) [04-SCW10C-BK](#) [04-SCBW19L-GR](#) [04-SCW19L-WH](#) [04-SCW19L-OR](#) [04-SCW38L-WH](#) [04-SCBW50L-OR](#) [04-SCBW50L-GR](#) [04-SCW10C-GR](#) [04-SCW10C-OR](#) [04-SCBW32L-GR](#) [04-SCBW32L-WH](#) [04-SCBW32L-OR](#) [04-SCBW6C-WH](#) [04-SCBW6C-GR](#) [04-SCBW6C-OR](#) [04-SCBW25L-GR](#)