



ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089
<http://www.nteinc.com>

NTE644 & NTE645 Silicon Rectifier Fast Recovery, Dual, Common Anode TO220 Type Package

Description:

The NTE644 and NTE645 are dual, fast recovery, common anode silicon rectifiers in a TO220 type package designed for special applications such as DC power supplies, inverters, converters, ultra-sonic systems, choppers and low RF interference.

Features:

- Low Forward Voltage
- High Current Capability
- Fast Switching for High Efficiency
- High Surge Capacity
- Glass Passivated Chip Junction


Absolute Maximum Ratings:

Peak Repetitive Reverse Voltage, V_{RRM}	
NTE644	400V
NTE645	600V
Working Peak Reverse Voltage, V_{RWM}	
NTE644	400V
NTE645	600V
DC Blocking Voltage, V_R	
NTE644	400V
NTE645	600V
RMS Reverse Voltage, $V_{R(RMS)}$	
NTE629	140V
NTE630	420V
Average Rectifier Forward Current (Rated V_R , $T_C = +150^\circ\text{C}$), $I_{F(AV)}$	
Per Diode	8A
Total Device	16A
Non-Repertitive Peak Surge Current, I_{FSM}	
(8.3ms Single Half Sine-Wave Superimposed on Rated Load)	250A
Operating Junction Temperature Range (Reverse Voltage Applied), T_J	-65° to $+175^\circ\text{C}$
Storage Temperature Range (Reverse Voltage Applied), T_{stg}	-65° to $+175^\circ\text{C}$

Electrical Characteristics:

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Instantaneous Forward Voltage	V_F	$I_F = 8A$	-	-	1.3	V
Instantaneous Reverse Current	I_R	At Rated V_R , $T_C = +25^\circ C$	-	-	10	$^\circ A$
		At Rated V_R , $T_C = +100^\circ C$	-	-	250	$^\circ A$
Junction Capacitance	C_P	Note 1	-	50	-	pF
Reverse Recovery Time NTE644	t_{rr}	$I_F = 0.5A, I_R = 1A, i_{rr} = 0.25A$	-	-	150	ns
			NTE645	-	-	250

Note 1. Measured at 1MHz and applied reverse voltage of 4V.

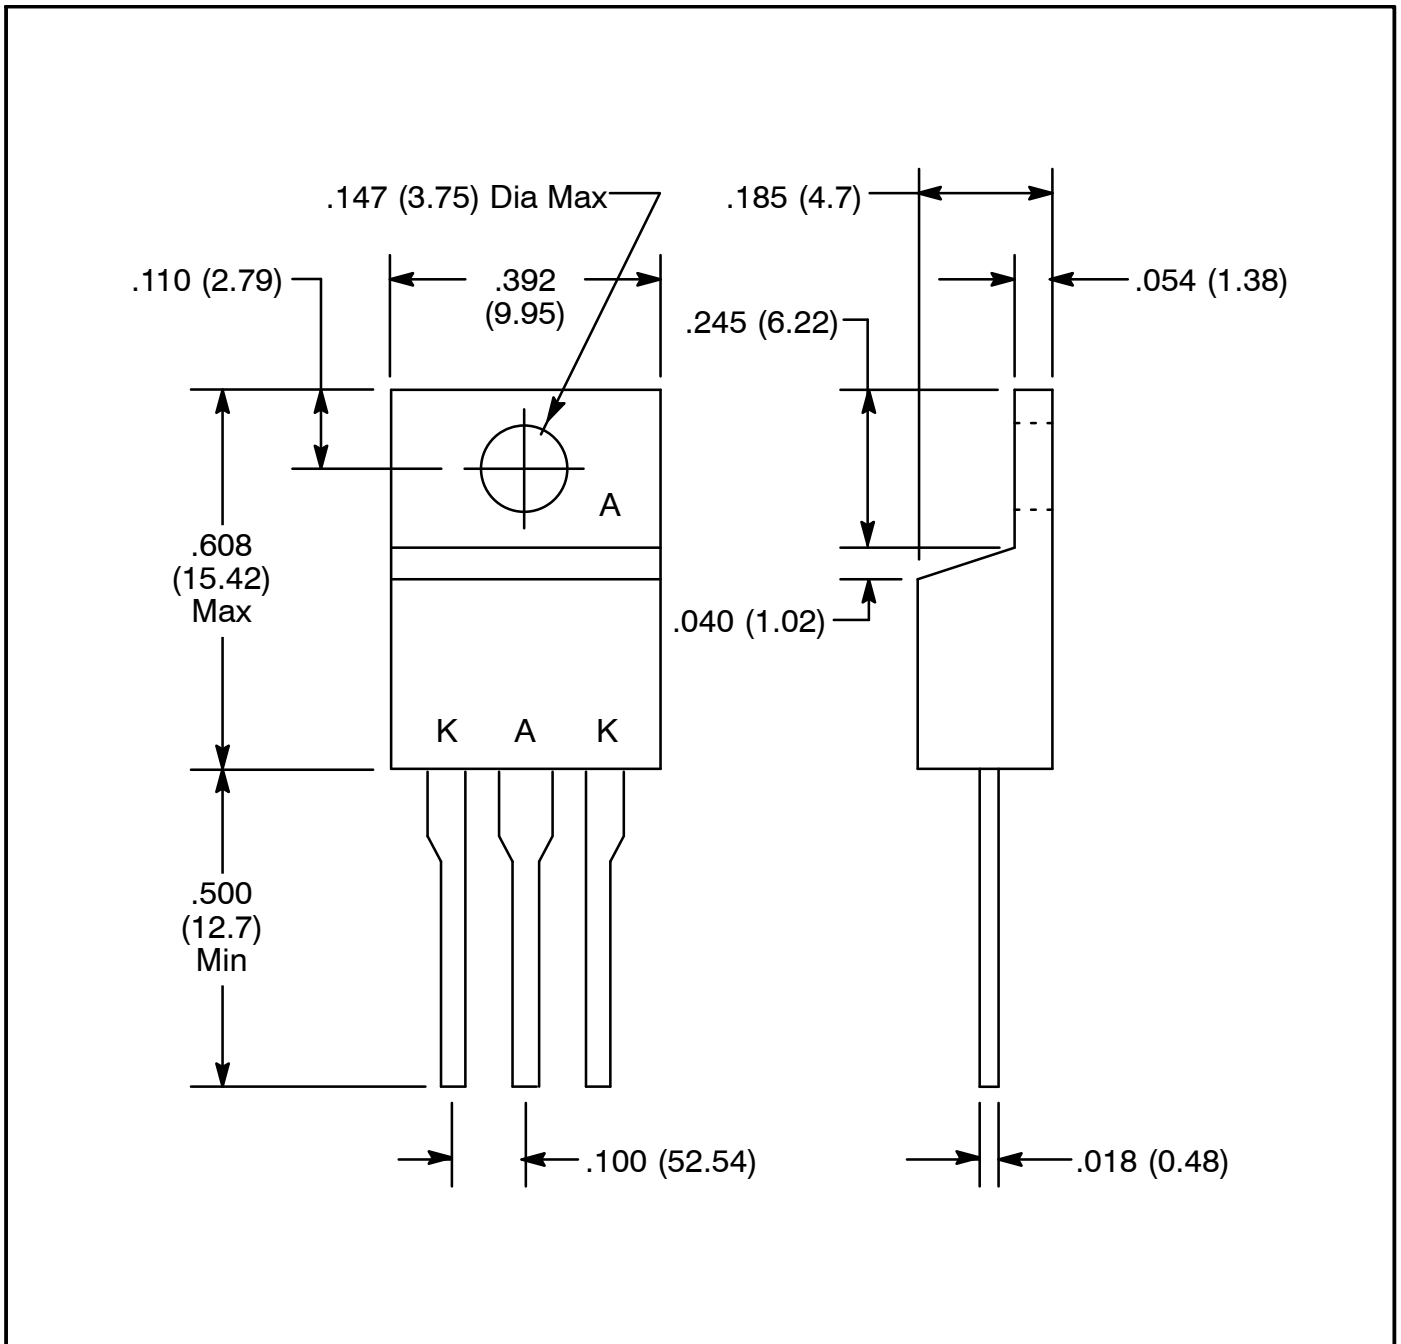

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [nte manufacturer](#):

Other Similar products are found below :

[747](#) [797](#) [868](#) [1724](#) [NEH680M50FE](#) [NEHH1.0M450CB](#) [NTE48](#) [NTE526A](#) [228A](#) [231](#) [954](#) [2023](#) [47-20848-R](#) [510](#) [R04-11A30-120](#) [04-SLPE3750A](#) [5615](#) [591](#) [7056](#) [NTE5710](#) [7448](#) [NEH.10M50AA](#) [NEH2.2M63AA](#) [NEH330M35DD](#) [NEH33M10AA](#) [NEV.22M100AA](#) [TP0006-100](#) [NTE182](#) [NTE528](#) [NTE542](#) [NTE74154](#) [WH20-02-25](#) [04-SCBW25L-BK](#) [04-SCBW32L-BK](#) [04-SCW10C-BK](#) [04-SCBW19L-GR](#) [04-SCW19L-WH](#) [04-SCW19L-OR](#) [04-SCW38L-WH](#) [04-SCBW50L-OR](#) [04-SCBW50L-GR](#) [04-SCW10C-GR](#) [04-SCW10C-OR](#) [04-SCBW32L-GR](#) [04-SCBW32L-WH](#) [04-SCBW32L-OR](#) [04-SCBW6C-WH](#) [04-SCBW6C-GR](#) [04-SCBW6C-OR](#) [04-SCBW25L-GR](#)