

## NTE941S Integrated Circuit Operational Amplifier

**Description:**

The NTE941S is a general purpose operational amplifier in a 7-Lead SIP type package and offers many features which make its application nearly foolproof: overload protection on the input and output, no latch-up when the common mode range is exceeded, as well as freedom from oscillators.

**Absolute Maximum Ratings:**

Supply Voltage, $V_S$ .....	$\pm 18V$
Differential Input Voltage, $V_{ID}$ .....	$\pm 30V$
Common Mode Input Voltage (Note 2), $V_{ICM}$ .....	$\pm 15V$
Power Dissipation (Note 1), $P_D$ .....	500mW
Output Short-Circuit Duration, $t_S$ .....	Continuous
Operating Temperature Range, $T_{opr}$ .....	0° to +70°C
Storage Temperature Range, $T_{stg}$ .....	-65° to +150°C
Junction Temperature, $T_J$ .....	+100°C
Lead Temperature (During Soldering, 10sec), $T_L$ .....	+260°C
Thermal Resistance, Junction-to-Ambient, $R_{thJA}$ .....	+100°C/W


Note 1. For operation at elevated temperatures, these devices must be derated based on thermal resistance, and  $T_J$  Max ( $T_J = T_A + (R_{thJA} P_D)$ ).


Note 2. For supply voltage less than  $\pm 15V$ , the absolute maximum input voltage is equal to the supply voltage.

**Electrical Characteristics:** ( $V_S = \pm 15V$ ,  $0^\circ \leq T_A \leq +70^\circ C$  unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit	
Input Offset Voltage	$V_{IO}$	$R_S \leq 10k\Omega$	$T_A = +25^\circ C$	–	2.0	6.0	mV
				–	–	7.5	mV
Input Offset Voltage Adjustment Range	$V_{IOR}$	$V_S = \pm 20V$ , $T_A = +25^\circ C$	–	$\pm 15$	–	V	
Input Offset Current	$I_{IO}$	$T_A = +25^\circ C$		–	20	200	nA
				–	–	300	nA
Input Bias Current	$I_{IB}$	$T_A = +25^\circ C$		–	80	500	nA
				–	–	0.8	$\mu A$
Input Resistance	$r_i$	$V_S = \pm 20V$ , $T_A = +25^\circ C$	0.3	2.0	–	$M\Omega$	
Common Mode Input Voltage Range	$V_{ICR}$	$T_A = +25^\circ C$	–	$\pm 12$	$\pm 13$	V	
Large Signal Voltage Gain	$A_V$	$V_O = \pm 10V$ , $R_L \geq 2k\Omega$	$T_A = +25^\circ C$	20	200	–	V/mV
				15	–	–	V/mV
Output Voltage Swing	$V_O$	$R_L \geq 10k\Omega$	$\pm 12$	$\pm 14$	–	V	
		$R_L \geq 2k\Omega$	$\pm 10$	$\pm 13$	–	V	
Output Short–Circuit Current	$I_{OS}$	$T_A = +25^\circ C$	–	25	–	mA	
Common–Mode Rejection Ratio	CMRR	$R_S \leq 10k\Omega$ , $V_{CM} = \pm 12V$	70	90	–	dB	
Supply Voltage Rejection Ratio	PSRR	$V_S = \pm 20V$ to $\pm 5V$ , $R_S \leq 10k\Omega$	77	96	–	dB	
Transient Response Rise Time	$t_{TLH}$	$T_A = +25^\circ C$ , Unity Gain	–	0.3	–	$\mu s$	
Transient Response Overshoot	os		–	5	–	%	
Transient Response Slew Rate	SR		–	0.5	–	V/ $\mu s$	
Supplu Current	$I_D$	$T_A = +25^\circ C$	–	1.7	2.8	mA	
Power Consumption	$P_C$	$T_A = +25^\circ C$	–	50	85	mW	

**Pin Connection Diagram**  
(Front View)

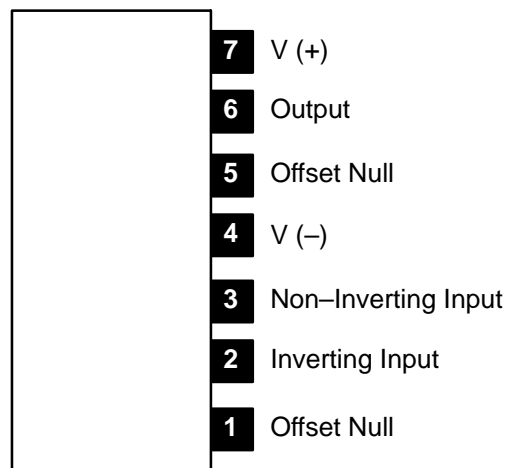

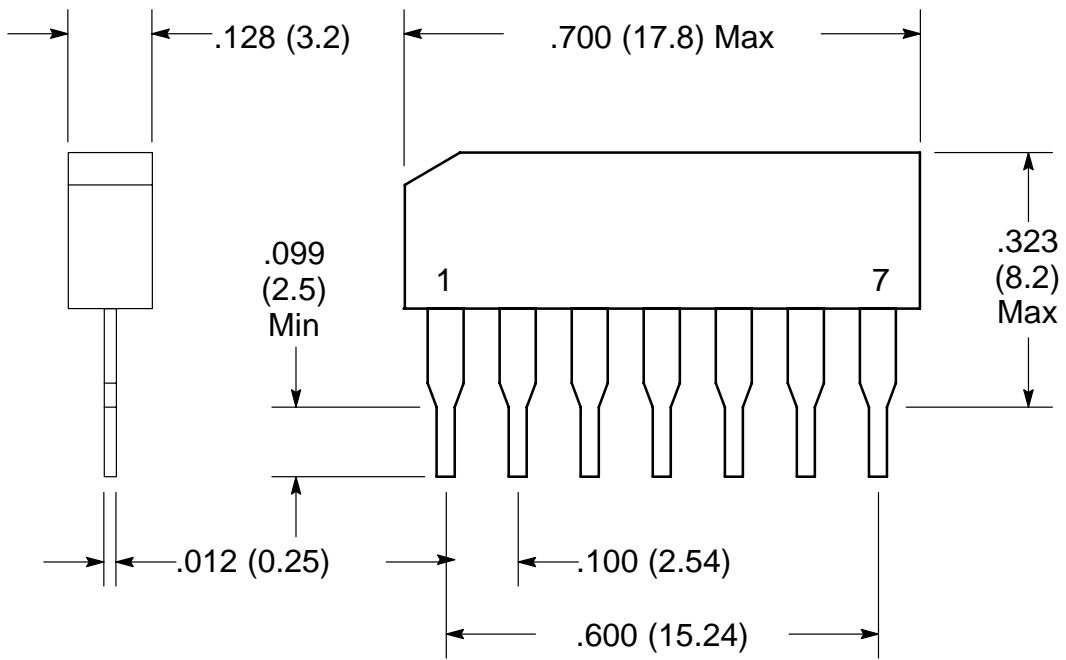

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Operational Amplifiers - Op Amps](#) category:*

*Click to view products by [NTE manufacturer](#):*

Other Similar products are found below :

[OPA2991IDSGR](#) [OPA607IDCKT](#) [007614D](#) [633773R](#) [635798C](#) [635801A](#) [702115D](#) [709228FB](#) [741528D](#) [NCV33072ADR2G](#) [SC2903DR2G](#)  
[SC2903VDR2G](#) [LM258AYDT](#) [LM358SNG](#) [430227FB](#) [430228DB](#) [460932C](#) [AZV831KTR-G1](#) [409256CB](#) [430232AB](#) [LM2904DR2GH](#)  
[LM358YDT](#) [LT1678IS8](#) [042225DB](#) [058184EB](#) [070530X](#) [714228XB](#) [714846BB](#) [873836HB](#) [MIC918YC5-TR](#) [TS912BIYDT](#)  
[NCS2004MUTAG](#) [NCV33202DMR2G](#) [M38510/13101BPA](#) [NTE925](#) [SC2904DR2G](#) [SC358DR2G](#) [LM358EDR2G](#) [AZV358MTR-G1](#)  
[AP4310AUMTR-AG1](#) [HA1630D02MMEL-E](#) [NJM358CG-TE2](#) [HA1630S01LPEL-E](#) [LM324AWPT](#) [HA1630Q06TELL-E](#) [NJM4558CG-TE2](#)  
[AZV358MMTR-G1](#) [SCY33178DR2G](#) [NCS4325DR2G](#) [LM7301SN1T1G](#)