

Technical data sheet

Wall light connection socket

Art.-Nr. 2003082



Wall luminaire connection socket with internal cover, space for 3 connection terminals, use according to VDE 0100, 3 break-out openings for cables and pipes \varnothing 18.7 mm, not to be used as a connection socket, protection rating IP20.



PS Polystyrene

Master data

Item no.	2003082
Type	UWA
Description 1	Wall light connection socket
Description 2	concealed
Dimension	60x30x32
Colour	Cream
RAL number	9001
Material	Polystyrene
Material symbol	PS
Smallest sales unit	25,00 Piece
Weight	0,89 kg/100 pc.


Technical data sheet

Wall light connection socket

Art.-Nr. 2003082



Technical data

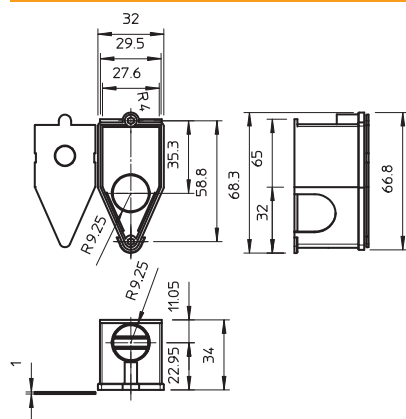

Width	30,00 mm
Height	32,00 mm
Length	60,00 mm
Closable	<input type="checkbox"/>
No. of entries	3,00
Entries	3
Type of entry	break-out openings for cables and pipes Ø 18.7 mm
Type of housing penetration	Pre-marking
Version for	Single
Shape	Other
Equipment	Without
Cover	Not transparent
Cover fastening	Screwed
Entry from rear	<input checked="" type="checkbox"/>
Flame resistant	Flame resistant to VDE 0471/DIN 695 Part 2-1, test temperature 650 °C
Shape	Other
For pipe diameter	Other
Function maintenance (ETIM)	Without
Floor height	34 mm
Halogen-free	<input checked="" type="checkbox"/>
With screening	<input type="checkbox"/>
With nail strap	<input type="checkbox"/>
With bolts	<input type="checkbox"/>
Mounting type	Concealed
Nominal cross section	1,50 - 2,50 mm ²
Nominal voltage	400,00 V
Sealable	<input type="checkbox"/>
Impact-resistant	<input checked="" type="checkbox"/>
Protection rating	IP20
Support	Without
Wind-tight	<input type="checkbox"/>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Electrical Enclosures](#) category:

Click to view products by [OBO BETTERMANN](#) manufacturer:

Other Similar products are found below :

[1201110001](#) [120-401](#) [120-905](#) [120-909](#) [120-403](#) [130-004](#) [MR-25L+](#) [30-8739](#) [PIP-11774SCREW](#) [30-9715](#) [30-9777-BU](#) [110-902](#) [110-901](#)
[A16N12BLP](#) [110-406](#) [110-401](#) [110-404](#) [120-405](#) [34861601](#) [106-009](#) [106-505](#) [105-405](#) [111-005](#) [127-909](#) [106-502](#) [130-475](#) [130-503](#) [127-](#)
[455](#) [9511150](#) [9511017](#) [9820011](#) [NSYTDB5PL](#) [137-455](#) [130-001](#) [105-904](#) [120-404](#) [137-005](#) [130-505](#) [127-406](#) [AB 1,5.0](#) [AB2.0](#) [ABM.0](#)
[73345601](#) [F-MP](#) [H-MP](#) [M-MP](#) [PAT 12040](#) [2461000](#) [9121230](#) [79541301](#)