





## Rugged Design, Economical Form, and Quality.

OHAUS CatapultTM 1000 compact bench scales offer users reliable and precise performance in an affordable, compact design. The Catapult 1000 family offers three capacities, from 20 lb up to 165 lb, reading in pounds and kilograms, with weighing, dynamic weighing and WeighAlert<sup>™</sup> modes. WeighAlert mode flashes weight display when weight on platform is above 70 lb -- the USPS shipping limit -- but under 150 lb -- when a package requires less-than-truckload shipment. Catapult 1000 scales are easy to transport and carry with built in carrying handles. Other standard features include an AC power pack, as well as battery operation with power saving auto-shut off mode. OHAUS Catapult 1000 series compact bench scales are the perfect solution for home use, general shipping applications, veterinary weighing, and other dry weighing applications where low cost, portability, and precision are required.

### Standard Features Include:


- Ultra Portable Design Catapult 1000 is easy to transport and hold with its light weight, battery operation, and built in handles
- **Durable** Overload protection is designed into Catapult 1000 weigh cells and makes the scale ideal for tough environments where capacity is exceeded regularly
- Most Value in its Class All Catapult 1000 scales come standard with WeightAlert (The digits will start to flash when the weight on the pan is between 70lb to 150lb) and dynamic weighing mode, auto shutoff, battery or AC power and unparalleled OHAUS durability

# **Catapult<sup>TM</sup> 1000** Compact Bench Scales

| Model                      | C11P9  | C11P20                       | C11P75                       |
|----------------------------|--|------------------------------|------------------------------|
| Capacity x Readability     | 20 x 0.01 lb<br>9 x 0.005 kg   | 44 x 0.02 lb<br>20 x 0.01 kg | 165 x 0.1 lb<br>75 x 0.05 kg |
| Weighing Units/Modes       | lb or kg   |                              |                              |
| Functions                  | Weighing, dynamic weighing, WeighAlert™ (only available in Ib weighing mode in C11P75 model) |                              |                              |
| Keyboard                   | Two mechanical switches  |                              |                              |
| Calibration                | Digital external span calibration  |                              |                              |
| Display (H x W)            | 1 x 2.8 in / 26 x 70 mm, 7 segment 4 digit LCD   |                              |                              |
| Tare Range                 | Full capacity by subtraction   |                              |                              |
| Stabilization Time         | <=2 seconds  |                              |                              |
| Operating Temp. & Humidity | 41° F (5° C) to 104° F (40° C) at 10% to 80% relative humidity, non-condensing               |                              |                              |
| Construction               | ABS plastic housing and pan  |                              |                              |
| Power                      | AC powered (included) or (3) 'C' batteries (not included)                                    |                              |                              |
| Battery Life               | 300 hours with alkaline cells with auto off after 4 minutes of inactivity                    |                              |                              |
| Dimensions (L x W x H)     | 10.5 x 12.0 x 2.4 in / 266 x 304 x 60 mm   |                              |                              |
| Pan Size (L x W)           | 11.0 x 12.4 in / 280 x 316 mm  |                              |                              |
| Net Weight                 | 3.5 lbs / 1.5 kg (not including AC adapter)  |                              |                              |
| Shipping Weight            | 4.4 lbs / 2kg  |                              |                              |

#### **Outline Dimensions**

adificationa

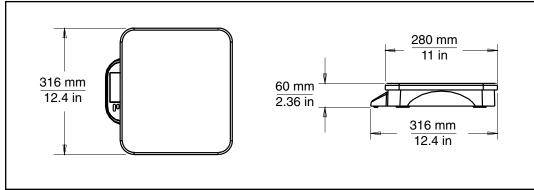

#### **Standard Features**

Built in carry handles, large LCD, ABS plastic housing with reinforced ribs, two raised tactile keys, standard AC power adapter or three 'C' cell battery operation (batteries not included), low battery detect, rubber non-slip feet, digital external calibration

#### Accessories

Stainless steel weighing pan (p/n 80251248)

#### Compliance

• Electrical/Emissions: Meets requirements of approval agencies: UL/CSA (adapter), FCC, CE Safety EN60950, EMC EN61326

Compliant to Directive 2002/96/EC on waste electrical and electronic equipment (WEEE)

• Quality: Ohaus quality management system registered to ISO 9001:2008

#### **OHAUS CORPORATION**

7 Campus Drive Suite 310 Parsippany, NJ 07054 USA

Tel: 800.672.7722 973.377.9000 Fax: 973.944.7177

#### www.ohaus.com

© Copyright Ohaus Corporation

80774367\_C

With offices throughout Europe, Asia, and Latin America

\* ISO 9001 Registered Quality Management System



## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Tool Kits & Cases category:

Click to view products by Ohaus manufacturer:

Other Similar products are found below :

 AM3310HLX23GXS
 229668-1
 217434-1
 QB-78K0RKE3L-TB
 4263
 1055420-1
 11-18-3023
 63860-8170
 856600-2
 11-40-3247
 63883 

 2870
 63866-1070
 63865-5170
 63863-5070
 63892-7370
 11-18-3209
 63860-4070
 63881-0970
 A0403641
 11-18-3040
 63865-2070
 63910 

 1470
 11-11-0387
 63850-7470
 11-18-3201
 63910-7570
 FM 0501
 146
 63883-0670
 63830-0070
 63901-2670
 11-18-3147
 11-18-3079
 63883 

 2670
 63900-1770
 11-18-3190
 63851-1070
 63912-4770
 63911-5270
 63895-1070
 63860-1470
 63850-6070
 1-69411-3
 63852-9270
 63802 

 6270
 11-18-3202
 63852-9170
 63830-0170
 11-18-3016
 63910-2870
 11-18-3010
 63850-1070
 63830-0170
 11-18-3016
 63910-2870