

## **COMPASS™CX SERIES**

Portable Scales



### Energy-Efficient Portable Scale Suitable for Workplace and in-the-Field Weighing

Designed with energy efficiency in mind, the Compass CX series offers a battery life of up to **1,000 continuous hours**, allowing for uninterrupted operation. Featuring a slim, stackable and light-weight design, the CX fits ideally in lab, industrial, education, and even household settings. The streamlined two-button operation means that the balance can be operated easily, and large backlit LCD display enables easy viewing of weighing results.

#### **Standard Features:**

- Alkaline batteries provide up to **1,000 hours of continuous use**, making for energy efficient weighing in the workplace, classroom, etc.
- Large backlit display increases readability in low-light conditions and makes it easier to view results from a distance.
- Slim, space-saving design allows for stackable storage for up to four scales.

# **COMPASS™CX SERIES** Portable Scales

Model	CX221	CX621	CX1201	CX2200	CX5200	
Capacity (g)	220	620	1200	2200	5200	
Readability (g)	0.1					
Span Calibration Mass (Not Included)	200 g	500 g	1 kg 2 kg		2 kg	
Stabilization Time(s)	1	1.5 2		1.5		
Construction	ABS housing and stainless steel pan					
Calibration	User-selectable external span / Digital with external weight					
Tare Range	Full capacity by subtraction					
Weighing Units*	g, N, oz, lb:oz					
Application Modes	Weighing					
Power Requirement	3 AA batteries (included) or AC adapter (not included)					
Typical Battery Life	1,000 hours					
Display Type	Liquid crystal display (LCD) with backlight					
Display Size	18 mm					
Pan Size (W × D)	128 × 142 mm					
Balance Dimensions (W $\times$ D $\times$ H)	135 × 201 × 41 mm					
Shipping Dimensions (W $\times$ D $\times$ H)	170 × 235 × 55 mm					
Net Weight	0.5 kg					
Shipping Weight	0.7 kg					

<sup>\*</sup>Availability is dependent on model.

#### **Other Standard Features and Equipment**

ABS housing, slip-resistant feet, stability indicator, mechanical and software overload/underload protection, low battery indicator, auto shut-off


#### **Compliance**

- Product Safety: IEC/EN 61010-1
- Electromagnetic Compatibility: IEC/EN 61326-1 Class B, Basic environments; FCC Part 15 Class B; Canada ICES-003 Class B
- Compliance Marks: CE; RCM

#### Accessories

Carrying Case	.30467763
Bowl, 1050 mL	.80850075
Adapter, 5V 1A EU, fixed plug	.30333866
Adapter, 5V 1A UK, fixed plug	.30333867

#### **Dimensions**

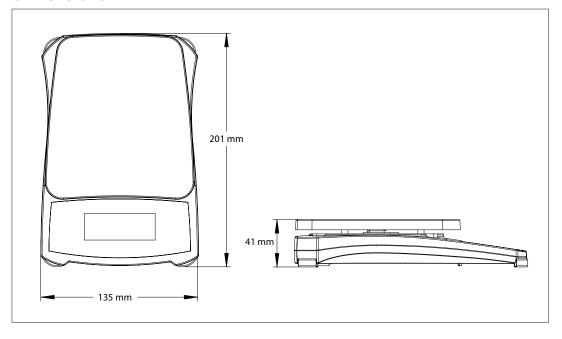

#### OHAUS Europe GmbH

Heuwinkelstrasse 8606 Naenikon Switzerland

e-mail: ssc@ohaus.com Tel: 0041 22 567 53 19 e-mail: tsc@ohaus.com Tel: 0041 22 567 53 20

#### www.ohaus.com

The management system governing the manufacture of this product is ISO 9001:2015 certified.

Europe Literature #



80775680\_B 20190719 © Copyright OHAUS Corporation

### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Ohaus manufacturer:

Other Similar products are found below:

<u>DISCRETE I/O KIT D22M300BXZ-M 83032109 SD200L 83032108 30037449 11117004 87000009 NVT6201 NVT6400M CR2200</u> CR221 CR621 CX2200 SD SD75L 30037447 83032107 CX221 CX621 NV1201 30037448 NVT12000 CR5200 NVT6200