

# 14A Series

## Alumina Body Current Sense



### FEATURES

- Ideal for current sensing applications
- 1% Tolerance standard
- Fixed resistance measuring point
- Low inductance
- RoHS compliant

14AFR Current Sense resistors feature a high temperature ceramic body which affords the user higher power densities than similar products which utilize silicone based epoxy molding compounds. The internal construction involves a straight, low inductance, 3-piece welded metal element at 1% tolerance. This series is stocked in 9 popular resistance values for easy accessibility.

### SERIES SPECIFICATIONS

Series	Wattage	Ohms
14A	4	0.004-0.051

### CHARACTERISTICS


<b>Terminals</b>	Solder-plated copper terminals or copper clad steel depending on ohmic value.
<b>Encapsulation</b>	Ceramic cased body
<b>Derating</b>	Linearly from 4W@70°C to 0W@250°C
<b>Max.Voltage</b>	$\sqrt{(P \times R)}$ RMS
<b>Climatic Category</b>	55/200/56
<b>TCR</b>	Varies from +150 to +1100ppm/°C based on resistance value. TCR increases as resistance value reduces from 51 to 4milliohms. TCR is tested as per IEC Specification 115-1 Clause 4.8.4.2
<b>Tolerance</b>	±1% standard. Others available.
<b>Power rating</b>	4W@70°C
<b>Dielectric withstanding voltage</b>	1000 VRMS for 3 and 5 watt; 500 VRMS for 2 watt.
<b>Insulation resistance</b>	Not less than 1000MΩ.
<b>Thermal EMF</b>	Less than ±2μV/°C.
<b>Temperature range</b>	-55°C to 275°C.

(continued)

# 14A Series

## Alumina Body Current Sense

### DIMENSIONS

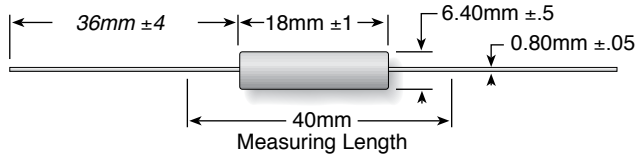


Series	Wattage	Length	Diam.	"M"	Lead
14A	4	0.709 / 18	0.252 / 6.40	1.575 / 40	0.031/0.80

### PERFORMANCE CHARACTERISTICS

Test	Condition	Maximum ΔR
<b>Endurance at Rated Power</b>	1000hrs Test	ΔR <5%
<b>Terminal Strength</b>	Pull Strength of 50N for 10sec, IEC115-1, Clause 4.16 Test Ua1	
<b>Solderability</b>	95% Coverage as per MIL STD 202F, Test 208	
<b>Resistance to Solder Heat</b>	260°C for 10sec as per IEC115-1, Clause 4.18	ΔR <0.5%
<b>Long Term Damp Heat</b>	90-95% RH @40°C for 56 Days, IEC115-1, Clause 4.24	ΔR <5%
<b>Climatic Sequence</b>	As per IEC 115-1, Clause 4.23	ΔR <5%
<b>Overload</b>	5 times rated wattage for 5 seconds	

### ORDERING INFORMATION

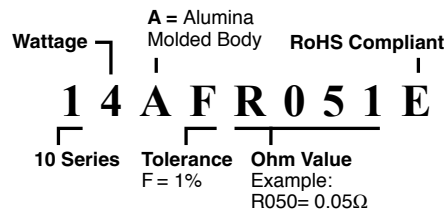

#### Standard part numbers

Ohmic value	Part Number
0.004	14AFR004E
0.005	14AFR005E
0.008	14AFR008E
0.010	14AFR010E
0.015	14AFR015E
0.022	14AFR022E
0.033	14AFR033E
0.047	14AFR047E
0.051	14AFR051E

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for* [Current Sense Resistors - Through Hole](#) *category:*

*Click to view products by* [Ohmite](#) *manufacturer:*

Other Similar products are found below :

[CPSL07R1000JB145](#) [SR10-0.015-1%](#) [SR20-0.008-1%](#) [HPCR0402F12K0K9](#) [HPCR0402F130RK9](#) [HPCR0402F13K0K9](#)

[HPCR0402F17K4K9](#) [HPCR0402F180KK9](#) [HPCR0402F180RK9](#) [HPCR0402F1K10K9](#) [HPCR0402F220KK9](#) [HPCR0402F220RK9](#)

[HPCR0402F24K0K9](#) [HPCR0402F27K0K9](#) [HPCR0402F2K00K9](#) [HPCR0402F33K0K9](#) [HPCR0402F430KK9](#) [HPCR0402F4K30K9](#)

[HPCR0402F4K70K9](#) [HPCR0402F680KK9](#) [HPCR0402F680RK9](#) [HPCR0402F390KK9](#) [HPCR0402F39K0K9](#) [HPCR0402F8K20K9](#)

[HPCR0402F560RK9](#) [HPCR0402F2K70K9](#) [HPCR0402F360KK9](#) [HPCR0402F36K0K9](#) [HPCR0402F3K00K9](#) [HPCR0402F3K90K9](#)

[HPCR0402F430RK9](#) [HPCR0402F43K0K9](#) [HPCR0402F475KK9](#) [HPCR0402F47K0K9](#) [HPCR0402F51K0K9](#) [HPCR0402F560KK9](#)

[HPCR0402F56K0K9](#) [HPCR0402F5K10K9](#) [HPCR0402F5K60K9](#) [HPCR0402F620KK9](#) [HPCR0402F620RK9](#) [HPCR0402F68K0K9](#)

[HPCR0402F6K20K9](#) [HPCR0402F6K80K9](#) [HPCR0402F750KK9](#) [HPCR0402F750RK9](#) [HPCR0402F7K50K9](#) [HPCR0402F820KK9](#)

[HPCR0402F82K0K9](#) [HPCR0402F910KK9](#)