### AP851 50 Watts TO-220 High Power Resistors



A high power TO-220 style resistor package designed for high frequency emitter circuits in switching power supplies. Also used in voltage regulation and low energy pulse loading.

- 50 Watts at 25°C case temperature on heat sink
- Single screw mounting to heat sink
- Moulded case for proctection and easy to mount
- Non-inductive design
- Electrically isolated case
- RoHS Compliant



#### **Characteristics**

Power rating: 2.25 Watts in free air

Operating voltage: 420V max Dielectric strength: 1800Vac Insulation resistance:  $10G\Omega$  min

Temperature coefficient: As specified, referenced to 25°C, ΔR taken at +105°C

Short time overload:  $\Delta R \pm 0.3\%$ , 2 times rated power with applied voltage not to exceed 1.5 times maximum continuous

operating voltage for 5 seconds

Load life:  $\Delta R \pm 1.0\%$ , 2000 hours at rated power

Damp heat with load:  $\Delta R \pm 0.5\%$ ,  $40 \pm 2^{\circ}C$ , 90 - 95% R.H max working voltage for 1000 hours with 1.5 hours "ON" and

0.5 hours "OFF"

Solderability: 90% min coverage, 245  $\pm$ 5°C for 3 seconds Thermal shock:  $\Delta R \pm 0.3\%$ , -65°C - 150°C, 100 cycles

Terminal strength:  $\Delta R \pm 0.2\%$ , 2.4 N Vibration and high frequency:  $\Delta R \pm 0.2\%$ , 20g peak


### **Electrical Specifications**

Resistance Value Range	Available Tolerance & Pref. Value Ranges	Available TCR
R1 - 1R	J (±5%) K (±10%)	Not specified
1R02 - 3R	F (±1%) , J (±5%) , K (±10%)	±300ppm/°C
3R01 - 10R		±100ppm/°C ±200ppm/°C
10R2 - 10K	D (±0.5%) F (±1%) J (±5%) K (±10%)	±50ppm/°C ±100ppm/°C ±200ppm/°C

Preferred value ranges:

F (±1%) - E96, J (±5%) - E24, K (±10%) - E12

## **Derating Curve**

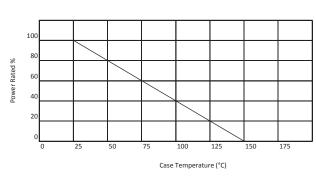

ARCOL UK Limited,

Threemilestone Ind. Estate,

Truro, Cornwall, TR4 9LG, UK.

T +44 (0) 1872 277431

F +44 (0) 1872 222002

E sales@arcolresistors.com

www.arcolresistors.com


The information contained herein does not form part of a contract and is subject to change without notice. ARCOL operate a policy of continual product development, therefore, specifications may change.

It is the responsibility of the customer to ensure that the component selected from our range is suitable for the intended application. If in doubt please ask ARCOL.

Page 1 of 2 2/13.18

# AP851 50 Watts TO-220 High Power Resistors



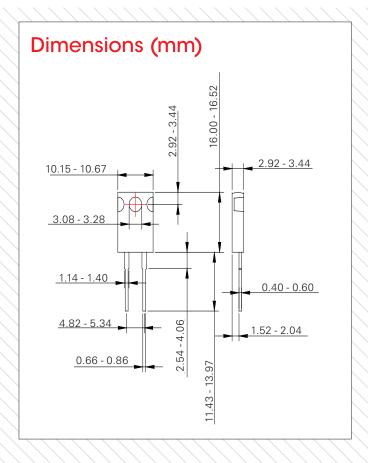

ARCOL UK Limited, Threemilestone Ind. Estate, Truro, Cornwall, TR4 9LG, UK. T +44 (0) 1872 277431

F +44 (0) 1872 222002

E sales@arcolresistors.com

www.arcolresistors.com

The information contained herein does not form part of a contract and is subject to change without notice. ARCOL operate a policy of continual product development, therefore, specifications may change.

It is the responsibility of the customer to ensure that the component selected from our range is suitable for the intended application. If in doubt please ask ARCOL.

Page 2 of 2 2/13.18

### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Thick Film Resistors - Through Hole category:

Click to view products by Ohmite manufacturer:

Other Similar products are found below:

```
M8340104M4701GCD03 M8340105K3300GGD03 M8340105K3922FGD03 M8340106K1002JCD03 M8340107K1002GGD03 M8340107K1152FGD03 M8340107K2701GCD03 M8340108K1000GCD03 M8340108K5601GCD03 M8340108M2203GCD03 M8340109K1002JCD03 M8340109K1003GCD03 M8340109K5101GGD03 FHV05010M0FKRB hte24511kf ARC3.11 2M J A M8340105K1001GCD03 M8340105K3002GGD03 M8340105M1002JGD03 M8340107K2001GGD03 M8340107K4701GGD03 M8340107K5600GGD03 M8340108K4990FGD03 M8340108K49R9FGD03 M8340108M10R0GGD03 M8340108M2002GCD03 M8340109K2202GGD03 M8340109K5601GCD03 MOX-GRD-001 MOX-SP025E JANSG2N7500U5 M8340107K2001GCD03 M8340104K2052FGD03 M8340102M4701GBD04 M8340102K1002GBD04 M8340102K1002GAD04 M8340109K2002GGD03 M8340108K22R0GGD03 M8340107M5100GGD03 OE1305 M8340104K39R2FCD03 M8340107K1003GGD03 MS126-9.09K-0.1% MS126-249K-0.1% MS-221-82R5 MOX-750231004DE MOX-4-127505J SM102034504FE M8340108M2003GGD03 M8340109K8200GCD03
```