

Ohmite molded composition potentiometers are available in various models for applications in military devices, industrial equipment and in equipment requiring a convenient resistance control device.



Potentiometers

Molded composition

FEATURES

- Low noise, smooth operation
- In accordance with "Mil" RV4N, RV4L, RV6L, RV6N, 2RV7N types
- RoHS compliant; non-RoHS version unavailable.

SPECIFICATIONS

Electrical

Derating: linear from 100% at +70°C to 0% at +120°C



Operating temp. range: -55°C to 120°C

Material

Construction: Elements molded into a single, integral structure. Metal cover protects and shields the internal parts.

Sealing: synthetic resin containing non-mercurial fungicide

Since all rheostats/potentiometers are electro-mechanical devices, they are subject to mechanical wear and, therefore, have a finite life.

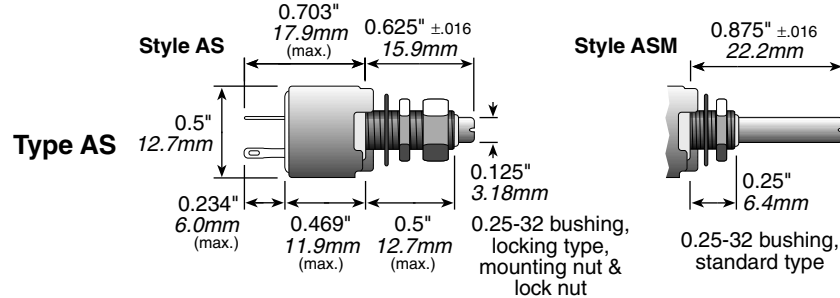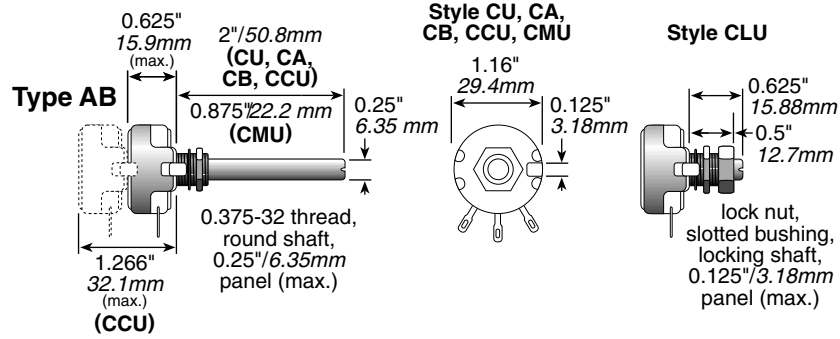

| Model | Watts | Ohmic range | Behind panel (In./mm) | Diameter (In./mm) | Rotation | Voltage (RMS) |
|-------|-------|-------------|-----------------------|-------------------|----------|---------------|
| AS | 0.5 | 50-5M | 0.703/17.9 | 0.50/12.7 | 295° ±5° | 350 |
| ASM | 0.5 | 50-5M | 0.703/17.9 | 0.50/12.7 | 295° ±5° | 350 |
| CA | 2.0 | 50-5M | 0.625/15.9 | 1.16/29.4 | 312° ±3° | 500 |
| CB | 2.0 | 50-5M | 0.625/15.9 | 1.16/29.4 | 312° ±3° | 500 |
| CU | 2.0 | 50-5M | 0.625/15.9 | 1.16/29.4 | 312° ±3° | 500 |
| CCU | 2.0 | 50-5M | 1.266/32.1 | 1.16/29.4 | 312° ±3° | 500 |
| CLU | 2.0 | 50-5M | 0.625/15.9 | 1.16/29.4 | 312° ±3° | 500 |
| CMU | 2.0 | 50-5M | 0.625/15.9 | 1.16/29.4 | 312° ±3° | 500 |

STANDARD PART NUMBERS FOR POTENTIOMETERS

| Ohmic value | MIL Designation | | | | | | | | MIL Designation | Part No. Prefix Suffix | MIL Designation | Part No. Prefix Suffix | MIL Designation | Part No. Prefix Suffix | | |
|-------------|-----------------|--------|--------|--------|--------|--------|--------|--------|-----------------|------------------------|-----------------|------------------------|-----------------|------------------------|---------|----------|
| | Prefix | Suffix | Prefix | Suffix | Prefix | Suffix | Prefix | Suffix | | | | | | | Prefix | Suffix |
| 50 | 500A | 5001 | ✓ | ✓ | | | | | | 50,000 | 503A | 5031 | ✓ | ✓ | AS3609E | ASM6669E |
| 100 | 101A | 1011 | ✓ | ✓ | | | | | | 75,000 | 753A | 7531 | ✓ | ✓ | AS3610E | ASM6670E |
| 150 | 151A | 1511 | ✓ | ✓ | | | | | | 100,000 | 104A | 1041 | ✓ | ✓ | AS3611E | ASM6671E |
| 250 | 251A | 2511 | ✓ | ✓ | | | | | | 150,000 | 154A | 1541 | ✓ | ✓ | AS3612E | ASM6672E |
| 350 | 351A | 3511 | ✓ | ✓ | | | | | | 250,000 | 254A | 2541 | ✓ | ✓ | AS3613E | ASM6673E |
| 500 | 501A | 5011 | ✓ | ✓ | | | | | | 350,000 | 354A | 3541 | ✓ | ✓ | AS3614E | ASM6674E |
| 750 | 751A | 7511 | ✓ | ✓ | | | | | | 500,000 | 504A | 5041 | ✓ | ✓ | AS3615E | ASM6675E |
| 1,000 | 102A | 1021 | ✓ | ✓ | | | | | | 750,000 | 754B | 7542 | ✓ | ✓ | | |
| 1,500 | 152A | 1521 | ✓ | ✓ | | | | | | 1,000,000 | 105B | 1052 | ✓ | ✓ | | |
| 2,500 | 252A | 2521 | ✓ | ✓ | | | | | | 1,500,000 | 155B | 1552 | ✓ | ✓ | | |
| 3,500 | 352A | 3521 | ✓ | ✓ | | | | | | 2,000,000 | 205B | 2052 | ✓ | ✓ | | |
| 5,000 | 502A | 5021 | ✓ | ✓ | | | | | | 2,500,000 | 255B | 2552 | ✓ | ✓ | | |
| 7,500 | 752A | 7521 | ✓ | ✓ | | | | | | 3,500,000 | 355B | 3552 | ✓ | ✓ | | |
| 10,000 | 103A | 1031 | ✓ | ✓ | | | | | | 5,000,000 | 505B | 5052 | ✓ | ✓ | | |
| 15,000 | 153A | 1531 | ✓ | ✓ | | | | | | | | | | | | |
| 25,000 | 253A | 2531 | ✓ | ✓ | | | | | | | | | | | | |
| 35,000 | 353A | 3531 | ✓ | ✓ | | | | | | | | | | | | |

✓ = Standard values; check availability
 * add "-E" for RoHS-compliant lead-free zinc-nickel plated product

Check product availability at www.ohmite.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Potentiometers](#) category:

Click to view products by [Ohmite](#) manufacturer:

Other Similar products are found below :

[590SX1N32F103SS](#) [006-0-1](#) [591SXJ48S252SC](#) [591SXP56S252SC](#) [591SXP56S503SC](#) [D31409](#) [70B1G048K502X-A](#) [70B1M032S502W](#)
[70B1N056S202W](#) [70B8N056F502W](#) [70J8N048S104U](#) [70L1N040P103W](#) [70L1N048P103X](#) [70L1N048S103W](#) [81R1A-R22-A20L](#) [85A2A-](#)
[B28-B27/R51](#) [GS1G044P103UA](#) [GS1T032S103UA](#) [A47-200K](#) [A4720K](#) [RA20LASD251A](#) [132-0-0-502](#) [132-2-0-202](#) [132-0-0-102](#) [132-0-0-](#)
[103](#) [132B00301](#) [RK14K1220-F25-C0-A103](#) [RK14K1220F25C0C104](#) [RK14K1220-F25-C1-B103](#) [14910AABHSX10102KA](#)
[14910F0GJSX10105KA](#) [14910FAGJSX10102KA](#) [14910FBGLFY00103KA](#) [14910AABHSX10103KA](#) [14910AABHSX10502KA](#)
[14910FAGJSX10104KA](#) [ASM6674E](#) [152-01031](#) [P140KH1-F15AR50K](#) [P170SPD-FC15BR10K](#) [P231-EC20BR5K](#) [P270-109A](#) [J97589](#)
[P9A2R000FISX1103MA](#) [248BBHS0XB25104MA](#) [248BBHS0XB25503MA](#) [RV170F-10-15R1-B500K-0021](#) [RV24AF-10-15R1-B500-3](#) [A43-](#)
[750](#) [A47-15K](#)