

The HS/HSN Series offers greater power capacity (100 and 250 watts) in the same design format as Ohmite's 89 Series.

HS/HSN Series maintains the same construction, materials, and manufacturing techniques as the 89 Series. As a made-to-order product, it is recommended for higher volume applications.

FEATURES

- Standard winding (Model HS)
- Non-inductive winding (Model HSN)
- Molded construction for total environmental protection
- Complete welded construction
- Mounts on chassis to utilize heat-sink effect
- High stability at conventional power ratings
- Flat marking surface for easy identification
- RoHS compliant; add "E" suffix to part number to specify.

SPECIFICATIONS

Material

Housing: Aluminum with hard anodic coating.

Internal Coating: Silicone.

Core: Ceramic.

Terminals: Solder-coated axial

Derating: Linearly from 100% @ +25°C to 0% @ +275°C.

Electrical

Tolerance: ±1% and ±5% (other tolerances available).

Power rating: Rating is based on chassis mounting area and temperature stability. Proper heat sink: 12" x 12" x 0.125 Aluminum panel.

Maximum ohmic values: See chart.

Overload: 5 times rated wattage for 5 seconds.

Temperature coefficient:


Under 1Ω: ±90 ppm/°C
1 to 9.99Ω: ±50 ppm/°C
10Ω and over: ±30 ppm/°C.

Dielectric withstanding voltage: 4500VAC.



HS/HSN Series

Aluminum Housed Axial Terminal Wirewound, Industrial/Commercial Grade

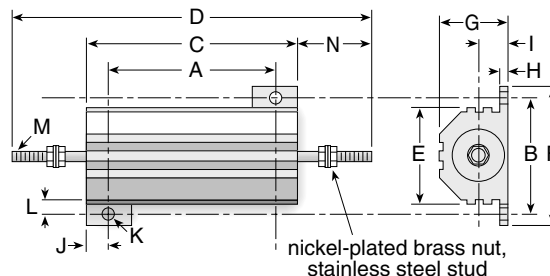


Series	Power Rating (Watts)	Resistance Range (Ohms)	Max. Working Voltage
HS100	100	.05 - 29.4K	1900
HSN100	100	1.0 - 14.7K	1350
HS250	250	.10 - 35.7K	2300
HSN250	250	1.0 - 17.4K	1625

DIMENSIONS

in. (mm)	HS100 / HSN100	HS250 / HSN250
	100 watt	250 watt
Dim. A	2.75 ± .010 (69.85 ± .254)	3.875 ± .010 (98.425 ± .254)
Dim. B	2.25 ± .010 (57.15 ± .254)	2.5 ± .010 (63.50 ± .254)
Dim. C	3.50 ± .031 (88.90 ± .787)	4.5 ± .031 (114.30 ± .787)
Dim. D	5.478 ± .093 (139.14 ± 2.36)	7.0 ± .093 (177.80 ± 2.36)
Dim. E	1.812 ± .031 (46.02 ± .787)	2.125 ± .031 (53.98 ± .787)
Dim. F	2.812 ± .031 (71.42 ± .787)	3.0 ± .031 (76.20 ± .787)
Dim. G	1.75 ± .031 (44.45 ± .787)	2.188 ± .031 (55.58 ± .787)
Dim. H	0.188 ± .031 (4.78 ± .787)	0.250 ± .031 (6.35 ± .787)
Dim. I	0.770 ± .015 (19.56 ± .381)	0.955 ± .015 (24.26 ± .381)
Dim. J	0.375 ± .031 (9.52 ± .787)	0.312 ± .031 (7.92 ± .787)
Dim. K	0.188 ± .010 (4.78 ± .254)	0.188 ± .010 (4.78 ± .254)
Dim. L	0.219 ± .031 (5.56 ± .787)	0.25 ± .031 (6.35 ± .787)
Dim. M	12 - 24 UNC - 2A THD	1/4 - 20 UNC - 2A THD
Dim. N	0.989 ± .031 (25.12 ± .787)	1.25 ± .031 (31.75 ± .787)

DERATING CURVE

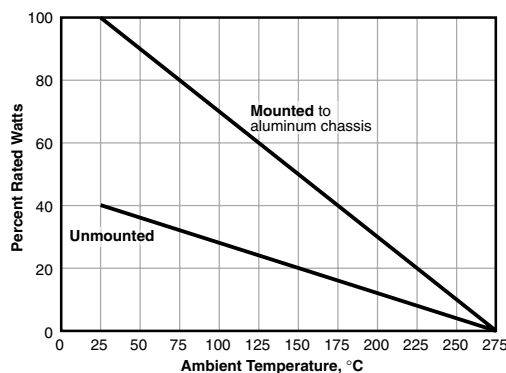

ORDERING INFORMATION

Non-Inductive Winding
Optional (blank = std. winding)

HSN100JR05E

Series	Wattage	Tolerance	Ohms	RoHS Compliant
100	F = 1%	R05 = 0.05Ω		
250	J = 5%	1R0 = 1.0Ω		
	K = 10%	10R = 10Ω		
		100 = 100Ω		
		10K = 10,000Ω		
		14K7 = 14,700Ω		

Check product availability at www.ohmite.com

To see the latest in resistor technology click on the "What's New" tab at ohmite.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Wirewound Resistors - Chassis Mount](#) category:

Click to view products by [Ohmite](#) manufacturer:

Other Similar products are found below :

[HD300HLR71J](#) [VK100NA-50](#) [40/70MJ2K00BE](#) [L75J1K0E](#) [VK100NA250](#) [L100J150E-MT1](#) [L50J500E-MT1](#) [SL130J100K-12](#) [F30J20R](#)
[HSC1008R0F](#) [HSX25R22J](#) [L100J40K](#) [CL65J10R](#) [HSW600 47R J](#) [HSW600 1R J](#) [L12NJ20R](#) [75342-400](#) [HSW600 22R J](#) [VRH320 1K K](#)
[VRH320 100R K](#) [968.15 110M C E](#) [HSW600 4R7 J](#) [40/70MJ230R0HE](#) [L25J500E-MT1](#) [1-2176247-6](#) [1-2176248-5](#) [2-2176248-0](#) [1-2176249-3](#)
[C1500K12R](#) [AG5NFR68E](#) [AG12NFR68E](#) [AG12NFR47E](#) [AG12NFR56E](#) [AG12NFR33E](#) [CL25J39R](#) [AG12NFR22E](#) [850J220E](#)
[AG12NFR10E](#) [CL225J30K](#) [810F7R7E](#) [LN100J75RE](#) [D50K100-B](#) [L225J6K0E](#) [21025K538-5R0KE](#) [LN80J30R](#) [C300KR75E](#) [D50K25R-B](#)
[LN80J14R](#) [L50JR60E](#) [L100J400E](#)