

# KDV Series

## Metal Film Low-Resistance Chip Resistor



### FEATURES

- Low Resistance / TCR / Inductance
- Excellent long-term stability
- High precision current sensing
- High power capability
- Halogen free and lead free
- RoHs compliant

### APPLICATIONS

- Consumer electronics
- Computer
- Telecom
- Measuring instrument
- Industrial / Power supply
- Battery management system

### SERIES SPECIFICATIONS

| Series | Size | Power @70°C | Max. Rated Current | Max. Overload Current | TCR (ppm/°C) | Resistance Range |
|--------|------|-------------|--------------------|-----------------------|--------------|------------------|
| KDV02  | 0201 | 1/10W       | 1.41A              | 3.16A                 |              |                  |
| KDV04  | 0402 | 1/8W        | 1.58A              | 3.54A                 | ±100         | 50mΩ ~ 100mΩ     |
| KDV06  | 0603 | 1/5W        | 2.00A              | 4.47A                 | ±50          | 100mΩ ~ 1000mΩ   |
| KDV08  | 0805 | 1/4W        | 2.24A              | 5.00A                 |              |                  |
| KDV12  | 1206 | 1/2W        | 3.16A              | 7.07A                 |              |                  |

### CHARACTERISTICS

**Operating Temp. Range** -55°C ~+155°C


**Power rating and current rating** Based on continuous full-load at ambient temperature of 70°C

**TCR** Test to -55°C is available on request

**Rated Current** Resistance Range: ≤1Ω. DC continuous working current or a AC (rms) continuous working current at commercial-line frequency and wave form corresponding to the power rating, as determined formula  
 Rated current =  $\sqrt{\text{Rated power}/\text{Resistance}}$


**Storage** Storage time at environmental temp. 25°C ±5° & humidity 60 ±20% is valid for one year from the date of delivery

### Derating

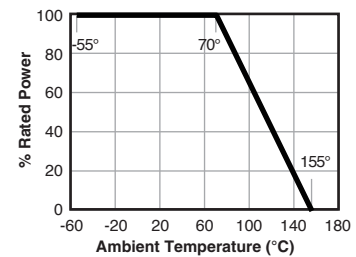


### DIMENSIONS

(mm)

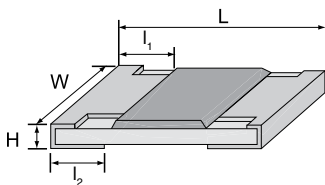

| Size  | L         | W         | H         | l1        | l2        | A    | B    | C    |
|-------|-----------|-----------|-----------|-----------|-----------|------|------|------|
| KDV02 | 0.60 ±.03 | 0.30 ±.03 | 0.26 ±.05 | 0.15 ±.05 | 0.15 ±.05 | 0.25 | 0.85 | 0.35 |
| KDV04 | 1.00 ±.10 | 0.50 ±.05 | 0.35 ±.05 | 0.20 ±.10 | 0.25 ±.10 | 0.50 | 1.60 | 0.70 |
| KDV06 | 1.60 ±.10 | 0.80 ±.10 | 0.45 ±.10 | 0.25 ±.15 | 0.30 ±.15 | 0.80 | 2.40 | 1.00 |
| KDV08 | 2.00 ±.10 | 1.25 ±.10 | 0.55 ±.10 | 0.35 ±.20 | 0.40 ±.20 | 1.30 | 2.90 | 1.45 |
| KDV12 | 3.10 ±.10 | 1.60 ±.10 | 0.55 ±.10 | 0.40 ±.20 | 0.45 ±.20 | 2.20 | 4.20 | 1.80 |

### Land pattern

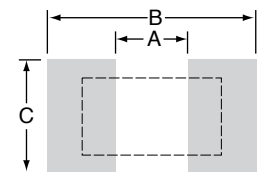

# KDV Series


## Metal Film Low-Resistance Chip Resistor

### PERFORMANCE DATA


| Test Method                              | Method                    | Procedure  | Requirements                                |
|--|---------------------------|--|---|
| Temp. Coefficient of Resistance (T.C.R.) | JIS C 5201-1, clause 4.8  | TCR +125°C, 25°C is the reference temperature  | Refer to Standard Electrical Specifications |
| Short Time Overload                      | JIS C 5201-1, clause 4.13 | Standard power: 6.25 times rated power whichever is less for 5 seconds<br>High power (2X/4X): 5 times rated power whichever is less for 5 seconds. | ±(1.0%+0.001Ω)                              |
| Insulation Resistance                    | JIS C 5201-1, clause 4.6  | 100V for 1 minute.   | ≥10GΩ                                       |
| Solderability                            | JIS C 5201-1, clause 4.17 | 245 ±5°C for 3 ±0.5secs.   | >95% Coverage, No visible damage            |
| Resistance to Soldering Heat             | JIS-C5201-1, clause 4.18  | 260 ±5°C for 10 seconds.   | ±(1.0%+0.001Ω), No visible damage           |
| Leaching                                 | JIS-C5201-1, clause 4.18  | 260 ±5°C for 30 seconds.   | >95% Coverage, No visible damage            |
| Temperature Cycling                      | JIS C 5201-1, clause 4.19 | -55°C to +155°C, 300 cycles  | ±(1.0%+0.001Ω), No visible damage           |
| High Temperature Exposure                | JIS-C5201-1 4.25          | 155 ±5°C for 1000 +48/-0 hours.  | ±(1.0%+0.001Ω)                              |
| Resistance to Solvent                    | JIS C 5201-1, clause 4.29 | The tested resistor be immersed into isopropyl alcohol of 20~25°C for 60 secs. Then the resistor is left in the room for 48 hrs.                   | ±(1.0%+0.001Ω), No visible damage           |
| Load Life in Humidity                    | JIS C 5201-1 clause 4.24  | 40±2°C, 90~95% R.H. , Rated power or Max. working current whichever is less for 1000 hrs with 1.5 hrs ON and 0.5 hr OFF.                           | ±(1.0%+0.001Ω)                              |
| Load Life (Endurance)                    | JIS C 5201-1 clause 4.25  | 70±2°C, Rated power, or Max. working current whichever is less for 1000 hrs with 1.5 hrs ON and 0.5 hr OFF.  | ±(1.0%+0.001Ω)                              |
| Terminal Bending Strength                | JIS C 5201-1, clause 4.33 | Bending once for 5 seconds: 0402, 0603, 0805 = 5mm; 1206, 1210 = 3mm; 2010, 2512 = 2mm   | ±(1.0%+0.001Ω), No visible damage           |

### SOLDERING

#### Wave solder

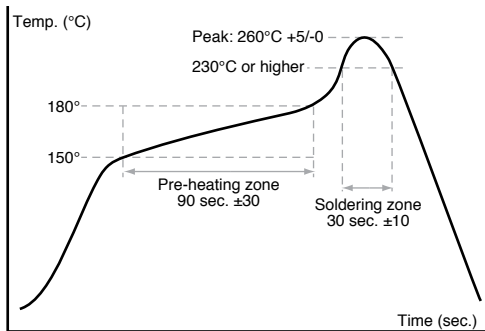

#### Solder reflow

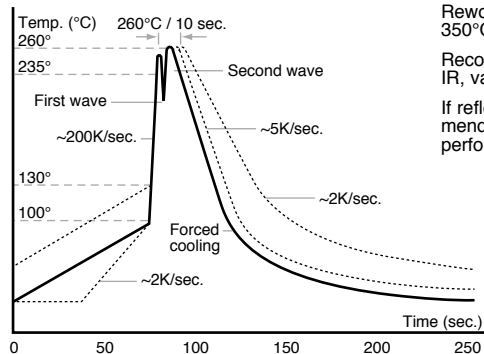

Rework temperature (hot air equipment):  
350°C, 3~5seconds

Recommended reflow methods:  
IR, vapor phase oven, hot air oven


If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

# KDV Series

## Metal Film Low-Resistance Chip Resistor

### TAPE AND REEL


(mm)

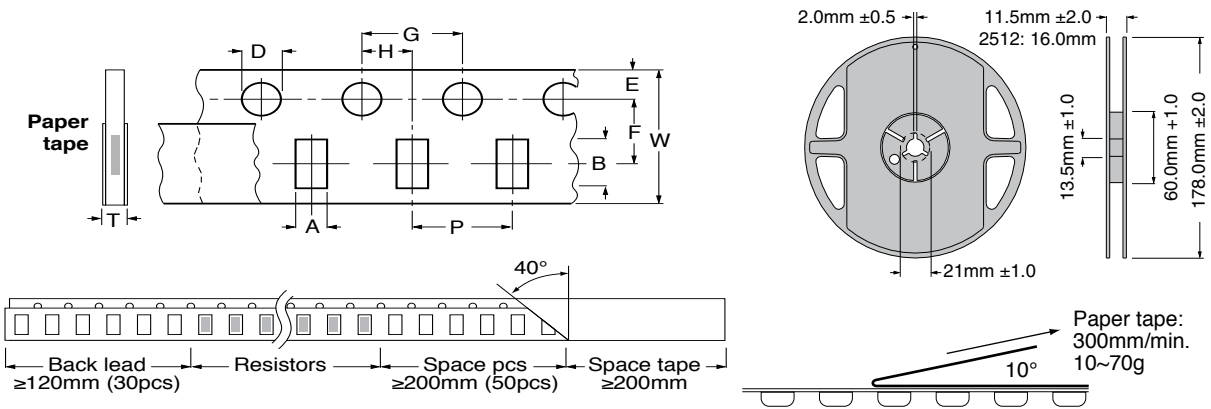

| Size  | A        | B        | W       | E        | F        | G       | H        | T        | D           | P       | Qty. per reel |
|-------|----------|----------|---------|----------|----------|---------|----------|----------|-------------|---------|---------------|
| KDV02 | 0.45 ±.1 | 0.75 ±.1 | 8.0 ±.2 | 1.75 ±.1 | 3.5 ±.05 | 4.0 ±.1 | 2.0 ±.05 | 0.35 ±.1 | 1.50 +.1/-0 | 2.0 ±.1 | 10K           |
| KDV04 | 0.7 ±.1  | 1.20 ±.1 | 8.0 ±.2 | 1.75 ±.1 | 3.5 ±.05 | 4.0 ±.1 | 2.0 ±.05 | 0.45 ±.1 | 1.50 +.1/-0 | 2.0 ±.1 | 10K           |
| KDV06 | 1.05 ±.2 | 1.80 ±.2 | 8.0 ±.2 | 1.75 ±.1 | 3.5 ±.05 | 4.0 ±.1 | 2.0 ±.05 | 0.60 ±.1 | 1.50 +.1/-0 | 4.0 ±.1 | 5K            |
| KDV08 | 1.55 ±.2 | 2.30 ±.2 | 8.0 ±.2 | 1.75 ±.1 | 3.5 ±.05 | 4.0 ±.1 | 2.0 ±.05 | 0.75 ±.1 | 1.50 +.1/-0 | 4.0 ±.1 | 5K            |
| KDV12 | 1.90 ±.2 | 3.05 ±.2 | 8.0 ±.2 | 1.75 ±.1 | 3.5 ±.05 | 4.0 ±.1 | 2.0 ±.05 | 0.75 ±.1 | 1.50 +.1/-0 | 4.0 ±.1 | 5K            |

### ORDERING INFORMATION

#### Marking

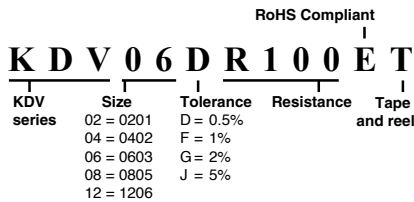

| Size                               | Resistance   | Code                 | Example              | Value                   |
|------------------------------------|--|----------------------|----------------------|-------------------------|
| 0201, 0402                         |  |                      | no marking           |                         |
| 0603                               | 50mΩ ~ 99mΩ<br>100mΩ ~ 990mΩ<br>1000mΩ                               | 0XX<br>RXX<br>1R0    | 068<br>R68<br>1R0    | 68mΩ<br>680mΩ<br>1000mΩ |
| 0805, 1206,<br>1210, 2010,<br>2512 | 50mΩ ~ 99mΩ (only for<br>0805,1206, 1210)<br>100mΩ ~ 990mΩ<br>1000mΩ | R0XX<br>RXXX<br>1R00 | R068<br>R680<br>1R00 | 68mΩ<br>680mΩ<br>1000mΩ |

#### Standard part numbers

| Ohm Value | Size | Power | Tolerance | Part. No. | 0201    | 0201    | 0402    | 0402    | 0603    | 0603    | 0805    | 0805    | 1206    | 1206    |
|-----------|------|-------|-----------|-----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|           |      |       |           |           | 0.10W   | 0.10W   | 0.125W  | 0.125W  | 0.20W   | 0.20W   | 0.25W   | 0.25W   | 0.5W    | 0.5W    |
|           |      |       |           |           | 0.5%    | 1%      | 0.5%    | 1%      | 0.5%    | 1%      | 0.5%    | 1%      | 0.5%    | 1%      |
|           |      |       |           |           | KDV02D- | KDV02F- | KDV04D- | KDV04F- | KDV06D- | KDV06F- | KDV08D- | KDV08F- | KDV12D- | KDV12F- |
| 50mΩ      |      |       |           | -R050ET   | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       |
| 68mΩ      |      |       |           | -R068ET   | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       |
| 82mΩ      |      |       |           | -R082ET   | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       |
| 100mΩ     |      |       |           | -R100ET   | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       |
| 120mΩ     |      |       |           | -R120ET   | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       |
| 150mΩ     |      |       |           | -R150ET   | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       |
| 180mΩ     |      |       |           | -R180ET   | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       |
| 200mΩ     |      |       |           | -R200ET   | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       |
| 220mΩ     |      |       |           | -R220ET   | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       |
| 240mΩ     |      |       |           | -R240ET   | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       |
| 270mΩ     |      |       |           | -R270ET   | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       |
| 300mΩ     |      |       |           | -R300ET   | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       |
| 330mΩ     |      |       |           | -R330ET   | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       |
| 360mΩ     |      |       |           | -R360ET   | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       |
| 390mΩ     |      |       |           | -R390ET   | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       |
| 470mΩ     |      |       |           | -R470ET   | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       |
| 510mΩ     |      |       |           | -R510ET   | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       |
| 560mΩ     |      |       |           | -R560ET   | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       |
| 620mΩ     |      |       |           | -R620ET   | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       |
| 820mΩ     |      |       |           | -R820ET   | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       | ✓       |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Current Sense Resistors - SMD category](#):*

*Click to view products by [Ohmite manufacturer](#):*

Other Similar products are found below :

[CRL0603-FW-R700ELF](#) [PFS35-200RF1](#) [NPS 2-T126 5.000 OHM 1%](#) [PFS35-0R01J1](#) [PFS35-0R05J1](#) [PFS35-5RF1](#) [CD2015FC-0.10-1%](#)  
[PR2512FKF7W0R004L](#) [RC1005F124CS](#) [RL73K3AR56JTDF](#) [RL7520WT-R001-F](#) [RL7520WT-R009-G](#) [RL7520WT-R020-F](#) [LRC-](#)  
[LR2512LF-01-R820J](#) [WR06X104JGLJ](#) [TL2BR01F](#) [65709-330](#) [SP1R12J](#) [RL7520WT-R039-G](#) [RL7520WT-R002-F](#) [LRF2010-R003JW](#)  
[KRL1632E-C-R200-F-T5](#) [KRL1632E-C-R200-F-T1](#) [RLP73M1ER051FTDF](#) [RLP73M2AR075FTDF](#) [RLP73M1JR051FTDF](#)  
[SR731ERTTP5R10F](#) [SR731ERTTP100J](#) [SR731ERTTP6R80F](#) [SR731ERTTP4R70F](#) [SR731ERTTP2R20F](#) [SR731ERTTP3R90F](#)  
[SR731ERTTP1R00F](#) [SR731ERTTP10R0F](#) [SR731ERTTP2R00F](#) [SR731ERTTP8R20F](#) [SR731ERTTP3R9J](#) [SR731ERTTP8R2J](#)  
[SR731ERTTP2R0J](#) [SR731ERTTP4R7J](#) [SR731ERTTP9R1J](#) [SR731ERTTP1R0J](#) [SR731ERTTP2R2J](#) [SR731ERTTP5R1J](#) [SR731ERTTP6R8J](#)  
[SR731ERTTP9R10F](#) [RCWE2512R180FKEA](#) [FCSL64R007JER](#) [LRF1206-R018FW](#) [TLR2B10DR022FTDG](#)