


MC4 Series

High Voltage 4-Resistor SMD DIP Package

Ohmite's MC4 Series offers 4 high voltage SMD resistors in a single DIP package, supplied on tape and reel for automated placement. Each resistor provides a rating of 0.75W with a maximum voltage of 2500 VDC. Designers can specify up to 4 different resistor value/tolerance combinations and connect them individually, in series, or parallel to derive countless results. The flexible S-Bend terminals provide solder joint integrity while leaving space between the resistor pack and the PCB. Standard parts are available in single resistance values for immediate delivery.

FEATURES

- Unique terminals allow spacing between board and resistor
- Design allows multiple configurations
- 2,500 volts max. per resistor per pack; 10KV total
- Supplied on tape & reel for automated placement

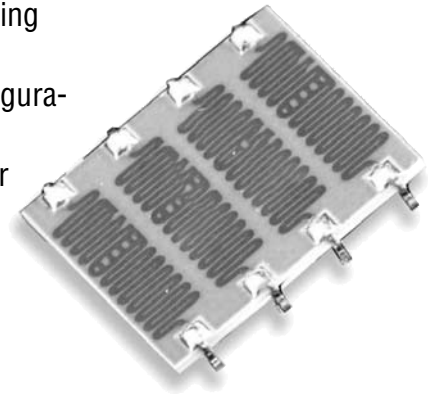

SERIES SPECIFICATIONS

Series	Resistance Range (Ohms)	Power @25°C per resistor	Max. Operating Voltage	Standard Temperature Coefficient 50PPM/°C	100PPM/°C
MC4	200Ω to 5,000M	0.75W	2,500	200Ω-250M	251M-5,000M


CHARACTERISTICS

Resistor	Thick film on Alumina
Resistance Range	200 ohms to 5,000M
Power Rating	0.75W per resistor, 3.0W total
Voltage Rating	2500 VDC per resistor
Tolerance	5% to 20%
Operating Temperature	-55°C to +180°C
TCR and VCR	see Slim Mox
Solder	Silver solder is recommended for MC4 resistors. Leaching of the silver in the termination will occur if non-silver solder is used. 60/40 tin-lead solders are not recommended for use with the MC4 product.

PERFORMANCE DATA

Characteristic	Test Method	Specification
Humidity	MIL-STD-202, Method 103B, Condition B	±0.25%
Dielectric Withstanding Voltage	MIL-STD-202, Method 301, 750V	±0.25%
Insulation Resistance	MIL-STD-202, Method 302, Condition A or B	>10,000M or greater dry
Thermal Shock	MIL-STD-202, Method 107G, Condition B, B-1, or F	±0.20%
Load Life	MIL-STD-202, Method 108A, Condition D	±1.0%
Resistance to Solvents	MIL-STD-202, Method 215G	No degradation of coating or marking
Shock (Specified Pulse)	MIL-STD-202, Method 213B, Condition I	±0.25%
Vibration, High Frequency	MIL-STD-202, Method 204D, Condition D	±0.20%
Power Conditioning	MIL-R-49462A, Par 4.8	±0.50%

POSSIBLE CONFIGURATIONS

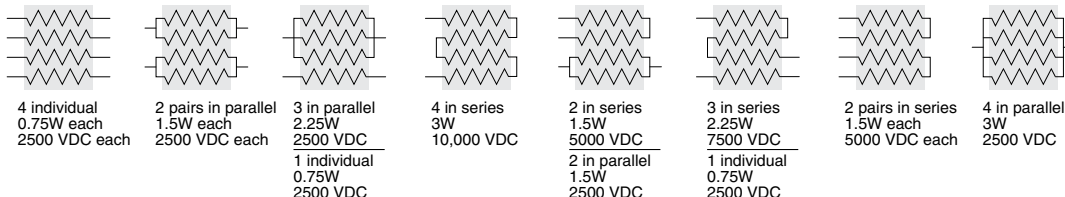


MC4 Series


High Voltage 4-Resistor SMD DIP Package

DIMENSIONS

(in./mm)

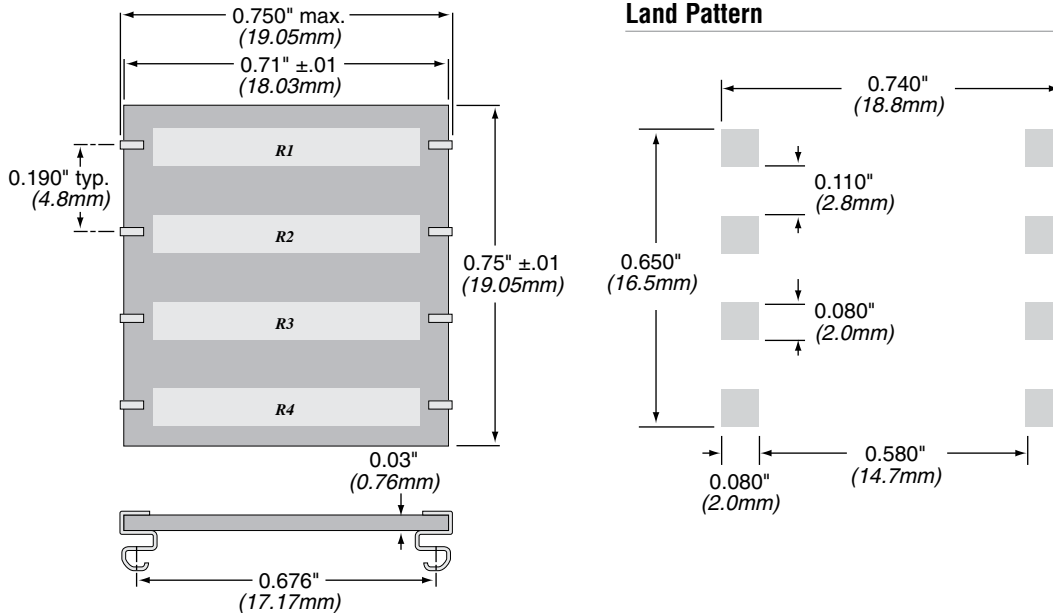

ORDERING INFORMATION

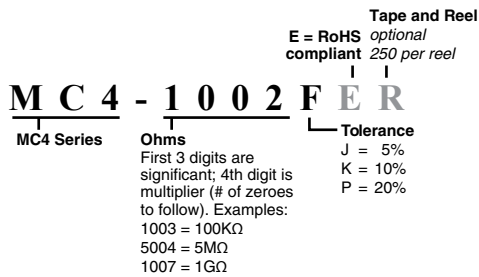


Standard Part Numbers

Part	Description
MC4-1003JER	100K ohms per resistor, 5%
MC4-5003JER	500K ohms per resistor, 5%
MC4-1004JER	1M ohms per resistor, 5%
MC4-5004JER	5M ohms per resistor, 5%
MC4-1005JER	10M ohms per resistor, 5%
MC4-5005JER	50M ohms per resistor, 5%
MC4-1006JER	100M ohms per resistor, 5%
MC4-5006JER	500M ohms per resistor, 5%
MC4-1007KER	1G ohms per resistor, 10%
MC4-5007KER	5G ohms per resistor, 10%

*Custom part numbers are assigned sequentially. MC4-SP0001, MC4-SP0002, etc. Go to this link to design your own MC4 resistor and have a unique part number assigned. www.ohmite.com/mc4sp/

Tape and Reel Orientation

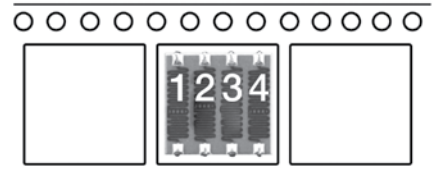

Design online at:
www.ohmite.com/mc4sp/

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Resistor Networks & Arrays](#) category:

Click to view products by [Ohmite](#) manufacturer:

Other Similar products are found below :

[M8340105K1002FGD03](#) [M8340105K3301JCD03](#) [M8340106M2002GCD03](#) [M8340107K1471FGD03](#) [M8340107K2002GCD03](#)
[M8340107K2261FGD03](#) [M8340107M1501GGD03](#) [M8340108K1001FCD03](#) [M8340108K1003FCD03](#) [M8340108K2402GGD03](#)
[M8340108K3240FGD03](#) [M8340108K6192FGD03](#) [M8340109K2872FCD03](#) [M8340109M4701GCD03](#) [M8340109MA010GHD03](#) [EXB-](#)
[24N121JX](#) [EXB-24N330JX](#) [EXB-24N470JX](#) [744C083101JTR](#) [EXB-U14360JX](#) [EXB-U18390JX](#) [744C083270JTR](#) [745C102472JP](#)
[767161104G](#) [MDP1603100KGE04](#) [770101223](#) [ACAS06S0830339P100](#) [ACAS06S0830343P100](#) [ACAS06S0830344P100](#) [RM2012A-](#)
[102/104-PBVW10](#) [RM2012A-102503-PBVW10](#) [8B472TR4](#) [268-15K](#) [ACAS06S0830341P100](#) [ACAS06S0830342P100](#)
[ACAS06S0830345P100](#) [EXB-U14470JX](#) [EXB-U18330JX](#) [266-10K](#) [M8340105M1001JCD03](#) [M8340106K4701GGD03](#)
[M8340107K1004GGD03](#) [M8340107K3402FCD03](#) [M8340108K1000GGD03](#) [M8340108K1202GGD03](#) [M8340108K3901GGD03](#)
[M8340108K4992FGD03](#) [M8340108K5111FGD03](#) [M8340109K2202GCD03](#) [RKC8BD104J](#)