



Model E

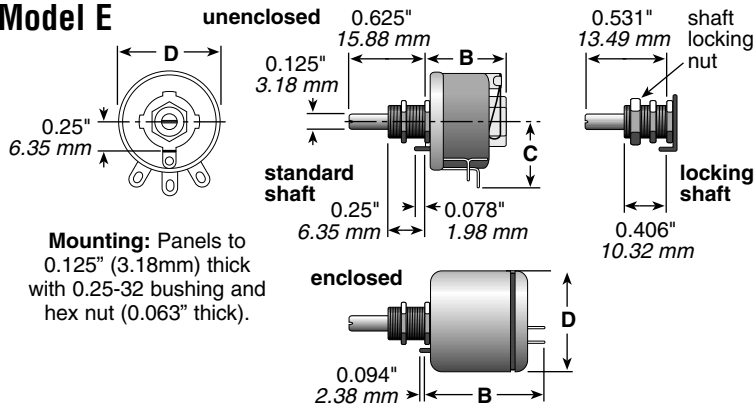

Mounting: Panels to 0.125" (3.18mm) thick with 0.25-32 bushing and hex nut (0.063" thick).

Models P, N, R, U

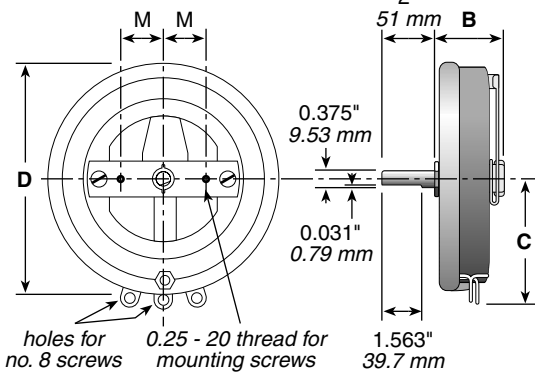

Dimension "M"


| | | |
|---|--------|----------|
| P | 0.875" | 22.23 mm |
| N | 1.188" | 30.16 mm |
| R | 1.5" | 38.1 mm |
| U | 3" | 76.2 mm |

Mounting: Panels to 1.25" (31.75mm) thick with 0.25-20 flat-head screws.


Rheostats (Potentiometers) Wirewound

Model C

Mounting: Panels to 0.125" (3.18mm) thick with 0.25-32 bushing and hex nut (0.063" thick).

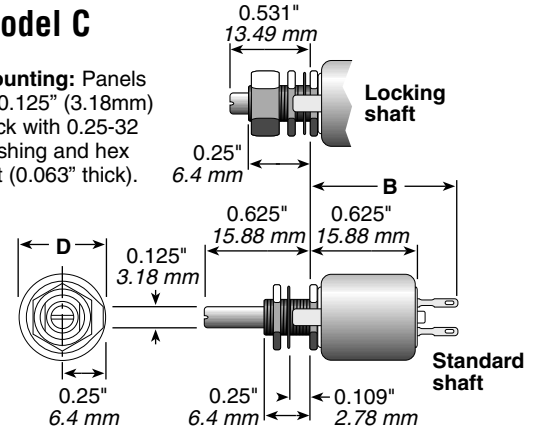

Models H, J, G, K, L

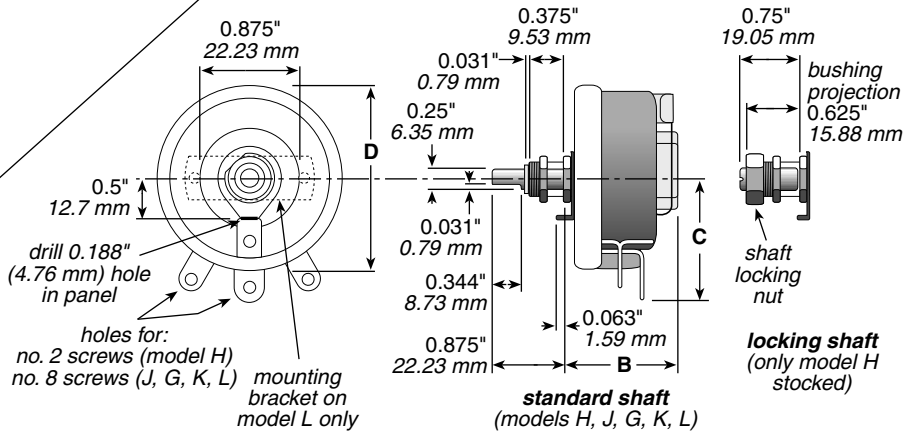

Mounting: Panels to 0.25" (6.35mm) thick with 0.375-32 bushing and hex nut (0.094" thick) (or with 10-32 x 0.75 F.H. screws for model L only).

See page 82 for knobs, dials, and other hardware

Dimensions for reference only; consult factory for details.

Since all rheostats/potentiometers are electro-mechanical devices, they are subject to mechanical wear and, therefore, have a finite life.

ORDERING INFORMATION

Series Rheostats Wirewound Potentiometers
 E = RoHS compliant
RCSR50E

| Code | Watts | Model | Shaft | Core | Resistance Value* |
|------|-------|-------|----------|----------|-------------------------|
| CL = | 7.5 | C | Locking | Enclosed | Example: R50 = 0.50Ω |
| CS = | 7.5 | C | Standard | Enclosed | 1R0 = 1Ω |
| EE = | 12.5 | E | Standard | Enclosed | 7R5 = 7.5Ω |
| EL = | 12.5 | E | Locking | Open | 250 = 250Ω |
| ES = | 12.5 | E | Standard | Open | 1K0 = 1,000Ω |
| GS = | 75 | G | Standard | Open | 1K75 = 1,750Ω |
| HL = | 25 | H | Locking | Open | 4K5 = 4,500Ω |
| HS = | 25 | H | Standard | Open | 50K = 50,000Ω |
| JS = | 50 | J | Standard | Open | |
| KS = | 100 | K | Standard | Open | |
| LS = | 150 | L | Standard | Open | |
| NS = | 300 | N | Standard | Open | |
| PS = | 225 | P | Standard | Open | |
| RS = | 500 | R | Standard | Open | |
| US = | 1000 | U | Standard | Open | |

*Check Table for Standard Resistance Values and Maximum Current Values

| Model | Type | Watts | Ohmic range | Core | Max. Voltage (RMS)* | Behind panel "B" (In./mm) | Diameter "D" (In./mm) | Dimension "C" (In./mm) | Shaft torque | Rotation (±5°) |
|-------|---------|-------|-------------|----------|---------------------|---------------------------|-----------------------|------------------------|------------------|----------------|
| E | RES/REL | 12.5 | 1.0-15K | open | 305 | 0.688/17.46 | 0.875/ 22.23 | 0.594/15.08 | 1-6 oz. in. | 300° |
| H | RHS/RHL | 25 | 1.0-25K | open | 500 | 1.375/34.93 | 1.560/ 39.62 | 0.940/23.88 | 0.25-0.5 lb. in. | 300° |
| J | RJS | 50 | 0.5-50K | open | 750 | 1.375/34.93 | 2.31 / 58.67 | 1.56 /39.62 | 0.25-2 lb. in. | 300° |
| G | RGS | 75 | 0.5-50K | open | 900 | 1.750/44.45 | 2.75 / 69.25 | 1.78 /45.21 | 0.5-2 lb. in. | 300° |
| K | RKS | 100 | 0.5-50K | open | 1000 | 1.750/44.45 | 3.125/ 79.38 | 1.91 /48.51 | 0.5-2 lb. in. | 300° |
| L | RLS | 150 | 0.5-50K | open | 1200 | 2.000 / 50.8 | 4.00 /101.60 | 2.28 /57.91 | 0.5-3 lb. in. | 300° |
| P | RPS | 225 | 1.0-30K | open | 1300 | 2.125/53.98 | 5.00 /127.00 | 2.97 /75.44 | 2.5-4 lb. in. | 310° |
| N | RNS | 300 | 1.0-50K | open | 1225 | 2.375/60.33 | 6.00 /152.40 | 3.44 /87.38 | 2.5-5 lb. in. | 320° |
| R | RRS | 500 | 1.0-20K | open | 1450 | 2.125/53.98 | 8.00 /203.20 | 4.31/109.47 | 4.5-7 lb. in. | 325° |
| U | RUS | 1000 | 1.0-20K | open | 1600 | 3.000 / 76.2 | 12.00 /304.80 | 6.38/162.05 | 3.5-7 lb. in. | 335° |
| C | RCS/RCL | 7.5 | 10.0-5K | enclosed | 305 | 0.875/22.23 | 0.515/ 13.08 | — | 0.25-3 oz. in. | 300° |
| E | REE | 12.5 | 1.0-15K | enclosed | 305 | 1.219/30.96 | 1.047/ 26.59 | — | 1-6 oz. in. | 300° |

- Models H, J, G, and K also available in enclosed versions.
- See Catalog #203 for complete details.
- RoHS compliant product available Jan. 2006 Add "E" suffix to part number to specify.
- Made-to-order rheostats available: Contact nearest Ohmite sales office.
- * Voltage rating dependent on resistance value.

STANDARD PART NUMBERS FOR RHEOSTATS

| Ohmic value | Part No. Prefix Suffix | 7.5W Model C | | | 12.5W Model E | | | 25W Model H | | | 50W Model J | 75W Model G | 100W Model K | 150W Model L | 225W Model P | 300W Model N | 500W Model R | 1000W Model U |
|-------------|------------------------|------------------|---------------|-----------|------------------|---------------|----------------|-------------|------------------|---------------|-------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| | | RCS — Std. shaft | RCL — Locking | Amps max. | RES — Std. shaft | REL — Locking | REE — Enclosed | Amps max. | RHS — Std. shaft | RHL — Locking | Amps max. | RJS — Amps max. | RGS — Amps max. | RKS — Amps max. | RLS — Amps max. | RPS — Amps max. | RNS — Amps max. | RRS — Amps max. |
| 0.5 —R50 | | | | | | | | | | | ✓ 10.0 | ✓ 12.3 | ✓ 14.1 | ✓ 17.3 | | | | |
| 1 —1R0 | | | | ✓ | ✓ | ✓ | 3.53 | ✓ | ✓ | 5.00 | ✓ 7.07 | ✓ 8.66 | ✓ 10 | ✓ 12.3 | ✓ 15.0 | ✓ 17.32 | ✓ 22.3 | ✓ 31.6 |
| 1.5 —1R5 | | | | ✓ | ✓ | ✓ | 2.50 | ✓ | ✓ | 3.54 | ✓ 5.00 | ✓ 6.12 | ✓ 7.07 | ✓ 8.65 | ✓ 10.6 | ✓ 12.24 | ✓ 15.8 | ✓ 22.4 |
| 2 —2R0 | | | | ✓ | ✓ | ✓ | 2.24 | ✓ | ✓ | | ✓ 5.00 | ✓ 6.12 | ✓ 7.07 | ✓ 8.65 | ✓ 10.6 | ✓ 12.24 | ✓ 15.8 | ✓ 22.4 |
| 2.5 —2R5 | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ 5.00 | ✓ 6.12 | ✓ 7.07 | ✓ 8.65 | ✓ 10.6 | ✓ 12.24 | ✓ 15.8 | ✓ 22.4 |
| 3 —3R0 | | | | ✓ | ✓ | ✓ | 2.04 | ✓ | ✓ | 2.88 | ✓ 3.53 | ✓ 5.00 | ✓ 5.75 | ✓ 7.07 | ✓ 8.66 | ✓ 10.00 | ✓ 12.9 | ✓ 18.3 |
| 4 —4R0 | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ 3.53 | ✓ 5.00 | ✓ 5.75 | ✓ 7.07 | ✓ 8.66 | ✓ 10.00 | ✓ 12.9 | ✓ 18.3 |
| 5 —5R0 | | | | ✓ | ✓ | ✓ | 1.58 | ✓ | ✓ | | ✓ 3.53 | ✓ 5.00 | ✓ 5.75 | ✓ 7.07 | ✓ 8.66 | ✓ 10.00 | ✓ 12.9 | ✓ 18.3 |
| 6 —6R0 | | | | ✓ | ✓ | ✓ | 1.44 | ✓ | ✓ | 2.04 | ✓ 2.88 | ✓ 3.16 | ✓ 3.65 | ✓ 4.47 | ✓ 5.49 | ✓ 6.32 | ✓ 7.75 | ✓ 10.0 |
| 7.5 —7R5 | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ 2.88 | ✓ 3.16 | ✓ 3.65 | ✓ 4.47 | ✓ 5.49 | ✓ 6.32 | ✓ 7.75 | ✓ 10.0 |
| 8 —8R0 | | | | ✓ | ✓ | ✓ | 1.25 | ✓ | ✓ | 1.77 | ✓ 2.50 | ✓ 2.74 | ✓ 3.16 | ✓ 3.88 | ✓ 4.74 | ✓ 5.48 | ✓ 7.90 | ✓ 11.2 |
| 10 —10R | ✓ | ✓ | 0.86 | ✓ | ✓ | ✓ | 1.12 | ✓ | ✓ | 1.58 | ✓ 2.04 | ✓ 2.74 | ✓ 3.16 | ✓ 3.88 | ✓ 4.74 | ✓ 5.48 | ✓ 7.90 | ✓ 11.2 |
| 12 —12R | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ 2.04 | ✓ 2.74 | ✓ 3.16 | ✓ 3.88 | ✓ 4.74 | ✓ 5.48 | ✓ 7.90 | ✓ 11.2 |
| 12.5 —12R5 | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ 2.04 | ✓ 2.74 | ✓ 3.16 | ✓ 3.88 | ✓ 4.74 | ✓ 5.48 | ✓ 7.90 | ✓ 11.2 |
| 15 —15R | ✓ | ✓ | 0.71 | ✓ | ✓ | ✓ | 0.91 | ✓ | ✓ | 1.29 | ✓ 1.76 | ✓ 2.17 | ✓ 2.50 | ✓ 3.163 | ✓ 3.87 | ✓ 4.47 | ✓ 6.30 | ✓ 8.95 |
| 16 —16R | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ 1.76 | ✓ 2.17 | ✓ 2.50 | ✓ 3.163 | ✓ 3.87 | ✓ 4.47 | ✓ 6.30 | ✓ 8.95 |
| 22 —22R | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ 1.50 | ✓ 2.17 | ✓ 2.50 | ✓ 3.163 | ✓ 3.87 | ✓ 4.47 | ✓ 6.30 | ✓ 8.95 |
| 25 —25R | ✓ | ✓ | 0.55 | ✓ | ✓ | ✓ | 0.71 | ✓ | ✓ | 1.00 | ✓ 1.76 | ✓ 2.17 | ✓ 2.50 | ✓ 3.163 | ✓ 3.87 | ✓ 4.47 | ✓ 6.30 | ✓ 8.95 |
| 35 —35R | ✓ | ✓ | 0.46 | ✓ | ✓ | ✓ | 0.60 | ✓ | ✓ | 0.845 | ✓ 1.19 | ✓ 1.73 | ✓ 2.0 | ✓ 2.450 | ✓ 3.00 | ✓ 3.46 | ✓ 4.47 | ✓ 6.33 |
| 40 —40R | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ 1.19 | ✓ 1.73 | ✓ 2.0 | ✓ 2.450 | ✓ 3.00 | ✓ 3.46 | ✓ 4.47 | ✓ 6.33 |
| 50 —50R | ✓ | ✓ | 0.39 | ✓ | ✓ | ✓ | 0.50 | ✓ | ✓ | 0.707 | ✓ 1.00 | ✓ 1.23 | ✓ 1.41 | ✓ 1.735 | ✓ 2.12 | ✓ 2.45 | ✓ 3.16 | ✓ 4.47 |
| 75 —75R | ✓ | ✓ | 0.32 | ✓ | ✓ | ✓ | 0.40 | ✓ | ✓ | 0.575 | ✓ 1.00 | ✓ 1.00 | ✓ 1.15 | ✓ 1.415 | ✓ 1.73 | ✓ 2.00 | ✓ 3.16 | ✓ 4.47 |
| 80 —80R | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ 0.790 | ✓ 1.00 | ✓ 1.15 | ✓ 1.415 | ✓ 1.73 | ✓ 2.00 | ✓ 3.16 | ✓ 4.47 |
| 100 —100 | ✓ | ✓ | 0.27 | ✓ | ✓ | ✓ | 0.36 | ✓ | ✓ | 0.500 | ✓ 0.630 | ✓ 0.866 | ✓ 1.00 | ✓ 1.225 | ✓ 1.50 | ✓ 1.73 | ✓ 2.00 | ✓ 3.16 |
| 125 —125 | | | | ✓ | ✓ | ✓ | 0.32 | ✓ | ✓ | 0.445 | ✓ 0.630 | ✓ 0.866 | ✓ 1.00 | ✓ 1.225 | ✓ 1.50 | ✓ 1.73 | ✓ 2.00 | ✓ 3.16 |
| 150 —150 | ✓ | ✓ | 0.22 | ✓ | ✓ | ✓ | 0.29 | ✓ | ✓ | | ✓ 0.575 | ✓ 0.866 | ✓ 1.00 | ✓ 1.225 | ✓ 1.50 | ✓ 1.73 | ✓ 2.00 | ✓ 3.16 |
| 160 —160 | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ 0.575 | ✓ 0.866 | ✓ 1.00 | ✓ 1.225 | ✓ 1.50 | ✓ 1.73 | ✓ 2.00 | ✓ 3.16 |
| 175 —175 | | | | ✓ | ✓ | ✓ | 0.27 | ✓ | ✓ | 0.375 | ✓ 0.575 | ✓ 0.866 | ✓ 1.00 | ✓ 1.225 | ✓ 1.50 | ✓ 1.73 | ✓ 2.00 | ✓ 3.16 |
| 200 —200 | ✓ | ✓ | 0.19 | ✓ | ✓ | ✓ | 0.25 | ✓ | ✓ | | ✓ 0.575 | ✓ 0.866 | ✓ 1.00 | ✓ 1.225 | ✓ 1.50 | ✓ 1.73 | ✓ 2.00 | ✓ 3.16 |
| 225 —225 | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ 0.470 | ✓ 0.612 | ✓ 0.707 | ✓ 0.865 | ✓ 1.06 | ✓ 1.22 | ✓ 1.41 | ✓ 1.69 |
| 250 —250 | ✓ | ✓ | 0.17 | ✓ | ✓ | ✓ | 0.22 | ✓ | ✓ | 0.316 | ✓ 0.408 | ✓ 0.500 | ✓ 0.575 | ✓ 0.775 | ✓ 0.866 | ✓ 1.00 | ✓ 1.24 | ✓ 1.41 |
| 300 —300 | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ 0.408 | ✓ 0.500 | ✓ 0.575 | ✓ 0.775 | ✓ 0.866 | ✓ 1.00 | ✓ 1.24 | ✓ 1.41 |
| 325 —325 | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ 0.408 | ✓ 0.500 | ✓ 0.575 | ✓ 0.775 | ✓ 0.866 | ✓ 1.00 | ✓ 1.24 | ✓ 1.41 |
| 350 —350 | ✓ | ✓ | 0.15 | ✓ | ✓ | ✓ | 0.19 | ✓ | ✓ | 0.267 | ✓ 0.408 | ✓ 0.500 | ✓ 0.575 | ✓ 0.775 | ✓ 0.866 | ✓ 1.00 | ✓ 1.24 | ✓ 1.41 |
| 400 —400 | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ 0.408 | ✓ 0.500 | ✓ 0.575 | ✓ 0.775 | ✓ 0.866 | ✓ 1.00 | ✓ 1.24 | ✓ 1.41 |
| 500 —500 | ✓ | ✓ | 0.12 | ✓ | ✓ | ✓ | 0.16 | ✓ | ✓ | 0.222 | ✓ 0.316 | ✓ 0.433 | ✓ 0.500 | ✓ 0.775 | ✓ 0.866 | ✓ 1.00 | ✓ 1.24 | ✓ 1.41 |
| 600 —600 | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ 0.316 | ✓ 0.433 | ✓ 0.500 | ✓ 0.775 | ✓ 0.866 | ✓ 1.00 | ✓ 1.24 | ✓ 1.41 |
| 700 —700 | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ 0.316 | ✓ 0.433 | ✓ 0.500 | ✓ 0.775 | ✓ 0.866 | ✓ 1.00 | ✓ 1.24 | ✓ 1.41 |
| 750 —750 | ✓ | ✓ | 0.10 | ✓ | ✓ | ✓ | 0.13 | ✓ | ✓ | 0.182 | ✓ 0.316 | ✓ 0.433 | ✓ 0.500 | ✓ 0.775 | ✓ 0.866 | ✓ 1.00 | ✓ 1.24 | ✓ 1.41 |
| 800 —800 | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ 0.250 | ✓ 0.316 | ✓ 0.365 | ✓ 0.447 | ✓ 0.567 | ✓ 0.655 | ✓ 0.817 | ✓ 1.15 |
| 900 —900 | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ 0.250 | ✓ 0.316 | ✓ 0.365 | ✓ 0.447 | ✓ 0.567 | ✓ 0.655 | ✓ 0.817 | ✓ 1.15 |
| 1000 —1K0 | ✓ | ✓ | 0.086 | ✓ | ✓ | ✓ | 0.10 | ✓ | ✓ | 0.155 | ✓ 0.224 | ✓ 0.274 | ✓ 0.316 | ✓ 0.500 | ✓ 0.578 | ✓ 0.707 | ✓ 1.00 | ✓ 1.41 |
| 1200 —1K2 | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ 0.224 | ✓ 0.274 | ✓ 0.316 | ✓ 0.500 | ✓ 0.578 | ✓ 0.707 | ✓ 1.00 | ✓ 1.41 |
| 1250 —1K25 | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ 0.224 | ✓ 0.274 | ✓ 0.316 | ✓ 0.500 | ✓ 0.578 | ✓ 0.707 | ✓ 1.00 | ✓ 1.41 |
| 1500 —1K5 | ✓ | ✓ | 0.071 | ✓ | ✓ | ✓ | 0.090 | ✓ | ✓ | 0.129 | ✓ 0.224 | ✓ 0.274 | ✓ 0.316 | ✓ 0.500 | ✓ 0.578 | ✓ 0.707 | ✓ 1.00 | ✓ 1.41 |
| 1600 —1K6 | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ 0.176 | ✓ 0.224 | ✓ 0.258 | ✓ 0.387 | ✓ 0.447 | ✓ 0.577 | ✓ 0.816 | ✓ 1.15 |
| 1750 —1K75 | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ 0.176 | ✓ 0.224 | ✓ 0.258 | ✓ 0.387 | ✓ 0.447 | ✓ 0.577 | ✓ 0.816 | ✓ 1.15 |
| 1800 —1K8 | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ 0.176 | ✓ 0.224 | ✓ 0.258 | ✓ 0.387 | ✓ 0.447 | ✓ 0.577 | ✓ 0.816 | ✓ 1.15 |
| 2000 —2K0 | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ 0.176 | ✓ 0.224 | ✓ 0.258 | ✓ 0.387 | ✓ 0.447 | ✓ 0.577 | ✓ 0.816 | ✓ 1.15 |
| 2250 —2K25 | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ 0.176 | ✓ 0.224 | ✓ 0.258 | ✓ 0.387 | ✓ 0.447 | ✓ 0.577 | ✓ 0.816 | ✓ 1.15 |
| 2500 —2K5 | ✓ | ✓ | 0.055 | ✓ | ✓ | ✓ | 0.070 | ✓ | ✓ | 0.100 | ✓ 0.141 | ✓ 0.173 | ✓ 0.200 | ✓ 0.300 | ✓ 0.346 | ✓ 0.447 | ✓ 0.633 | ✓ 0.816 |
| 3000 —3K0 | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ 0.141 | ✓ 0.173 | ✓ 0.200 | ✓ 0.300 | ✓ 0.346 | ✓ 0.447 | ✓ 0.633 | ✓ 0.816 |
| 3500 —3K5 | ✓ | ✓ | 0.046 | ✓ | ✓ | ✓ | 0.060 | ✓ | ✓ | 0.084 | ✓ 0.119 | ✓ 0.173 | ✓ 0.200 | ✓ 0.300 | ✓ 0.346 | ✓ 0.447 | ✓ 0.633 | ✓ 0.816 |
| 4500 —4K5 | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ 0.119 | ✓ 0.173 | ✓ 0.200 | ✓ 0.300 | ✓ 0.346 | ✓ 0.447 | ✓ 0.633 | ✓ 0.816 |
| 5000 —5K0 | ✓ | ✓ | 0.039 | ✓ | ✓ | ✓ | 0.050 | ✓ | ✓ | 0.070 | ✓ 0.100 | ✓ 0.123 | ✓ 0.141 | ✓ 0.300 | ✓ 0.346 | ✓ 0.447 | ✓ 0.633 | ✓ 0.816 |
| 7500 —7K5 | | | | ✓ | ✓ | ✓ | 0.041 | ✓ | ✓ | 0.058 | ✓ 0.079 | ✓ 0.100 | ✓ 0.115 | ✓ 0.141 | ✓ 0.300 | ✓ 0.346 | ✓ 0.447 | ✓ 0.633 |
| 8000 —8K0 | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ 0.079 | ✓ 0.100 | ✓ 0.115 | ✓ 0.141 | ✓ 0.300 | ✓ 0.346 | ✓ 0.447 | ✓ 0.633 |
| 10000 —10K | | | | ✓ | ✓ | ✓ | 0.035 | ✓ | ✓ | 0.050 | ✓ 0.079 | ✓ 0.100 | ✓ 0.115 | ✓ 0.141 | ✓ 0.300 | ✓ 0.346 | ✓ 0.447 | ✓ 0.633 |
| 12500 —12K5 | | | | ✓ | ✓ | ✓ | 0.031 | ✓ | ✓ | | ✓ 0.079 | ✓ 0.100 | ✓ 0.115 | ✓ 0.141 | ✓ 0.300 | ✓ 0.346 | ✓ 0.447 | ✓ 0.633 |
| 15000 —15K | | | | ✓ | ✓ | ✓ | 0.029 | ✓ | ✓ | 0.041 | ✓ 0.058 | ✓ 0.100 | ✓ 0.115 | ✓ 0.141 | ✓ 0.300 | ✓ 0.346 | ✓ 0.447 | ✓ 0.633 |
| 20000 —20K | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ 0.050 | ✓ 0.079 | ✓ 0.100 | ✓ 0.115 | ✓ 0.141 | ✓ 0.300 | ✓ 0.447 | ✓ 0.633 |
| 25000 —25K | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ 0.050 | ✓ 0.079 | ✓ 0.100 | ✓ 0.115 | ✓ 0.141 | ✓ 0.300 | ✓ 0.447 | ✓ 0.633 |
| 30000 —30K | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ 0.041 | ✓ 0.079 | ✓ 0.100 | ✓ 0.115 | ✓ 0.141 | ✓ 0.300 | ✓ 0.447 | ✓ 0.633 |
| 40000 —40K | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ 0.041 | ✓ 0.079 | ✓ 0.100 | ✓ 0.115 | ✓ 0.141 | ✓ 0.300 | ✓ 0.447 | ✓ 0.633 |
| 50000 —50K | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ 0.035 | ✓ 0.041 | ✓ 0.050 | ✓ 0.079 | ✓ 0.100 | ✓ 0.115 | ✓ 0.141 | ✓ 0.182 |

✓ = Standard values; check availability
 Rheostats are silicone-ceramic coated at and above the following ohmic values:
 Model C: all
 Model E: 3500Ω
 Model H: 7500Ω
 Model J: 15,000Ω
 Model G: 5000Ω
 Model K: 7500Ω
 Model L: 7500Ω

Check product availability at
www.ohmite.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Rheostats](#) category:

Click to view products by [Ohmite](#) manufacturer:

Other Similar products are found below :

[E-175-F1352ACOL](#) [E-175-F2-352](#) [E-200-F1-352](#) [J-22-F2-352](#) [J4F2-352](#) [H-15-F2-352](#) [H-50-F2-352](#) [J-125-503B](#) [J-300-F2-453](#) [E-100-S1](#)
[E250R13526584AL](#) [E-100-F2-352A](#) [63634-10K](#) [63994-15](#) [RJS725E](#) [H-5000-F2-6580B](#) [RCS225](#) [E-350-F1-352](#) [H-5K-L02](#) [J-10K-L02](#)
[RHS75R-B](#) [E-10-R1-352](#) [H-100-F2-380](#) [H-25-L02](#) [H-500-SL01](#) [H-25-L02-351](#) [J-1K0-F2-452](#) [H-5/75-F2-T2](#) [J-1000-L02](#) [H-10-F2-352](#) [L-](#)
[15-F2-T3](#) [H-2500-F2-6580B](#) [RLS300E](#) [E-50-F2-351](#) [J-12-F2-352](#) [U-200-F10-T2](#) [H-3-L02](#) [L-1000-F2-CT](#) [J-22-F2-452](#) [H-40-F2-452](#) [E-10-](#)
[S1-352](#) [H-175-L02-6580B](#) [REL10KE](#) [REL10RE](#) [RES100](#) [RES200](#) [RES200E](#) [RES3K5E](#) [RES5K0E](#) [RES2K5E](#)