

# Ready-Made Insulated Thermocouples

**Convenient Packages of 5**

MEETS OR EXCEEDS SPECIAL LIMITS OF ERROR (SLE) AND EN 60584-2; Tolerance Class 1

**Kapton® Insulation Available**

## 5SRTC/5LRTC Series 5-Pack

- ✓ Available from Stock in Convenient 5-Packs
- ✓ NIST Calibration Available
- ✓ PFA Insulated Wire has Max Service Temp of 260°C (500°F)
- ✓ Glass Braid Insulated Wire has Max Service Temp of 480°C (900°F)
- ✓ Kapton® Insulated Wire has Max Service Temp of 260°C (500°F)
- ✓ Available in 1 and 2 m (40 and 80") Lengths
- ✓ Max Service Temp for Connector Body 220°C (425°F)

**Custom Lengths, Insulations, and Configurations Available**



### Miniature Size

Model Number ANSI Color Code	AWG Gage	Diameter mm (inch)	Insulation
5SRTC-GG-(*)-20-(**)	20	0.81 (0.032)	Glass Braid
5SRTC-GG-(*)-24-(**)	24	0.51 (0.020)	Glass Braid
5SRTC-GG-(*)-30-(**)	30	0.25 (0.010)	Glass Braid
5SRTC-TT-(*)-20-(**)	20	0.81 (0.032)	PFA
5SRTC-TT-(*)-24-(**)	24	0.51 (0.020)	PFA
5SRTC-TT-(*)-30-(**)	30	0.25 (0.010)	PFA
5SRTC-TT-(*)-36-(**)	36	0.13 (0.005)	PFA
5SRTC-TT-(*)-40-(**)	40	0.076 (0.003)	PFA
5SRTC-KK-(*)-20-(**)	20	0.81 (0.032)	Kapton
5SRTC-KK-(*)-24-(**)	24	0.51 (0.020)	Kapton
5SRTC-KK-(*)-30-(**)	30	0.25 (0.010)	Kapton

\* Insert calibration J, K, T, or E. \*\* Specify length, insert "36" for 1 m or "72" for 2 m length.  
 Note: Add cost per additional 300 mm (1') per package of 5 on GG or TT wire.  
 On KK wire add cost per additional 1 foot per package.


**Ordering Example:** 5SRTC-TT-K-36-72, 5-pack of Type K thermocouples with 2 m (80") of 36 AWG PFA insulated wire and a molded mini connector with snap-on strain relief.

### Standard Size

To Order			
Model Number ANSI Color Code	AWG Gage	Diameter mm (inch)	Insulation
5LRTC-GG-(*)-20-(**)	20	0.81 (0.032)	Glass Braid
5LRTC-GG-(*)-24-(**)	24	0.51 (0.020)	Glass Braid
5LRTC-TT-(*)-20-(**)	20	0.81 (0.030)	PFA
5LRTC-TT-(*)-24-(**)	24	0.51 (0.020)	PFA
5LRTC-KK-(*)-20-(**)	20	0.81 (0.032)	Kapton
5LRTC-KK-(*)-24-(**)	24	0.51 (0.020)	Kapton

\* Insert calibration J, K, T, or E. \*\* Specify length, insert "36" for 1 m or "72" for 2 m length.  
 Note: Add cost per additional 300 mm (1') per package of 5 on GG or TT wire.  
 On KK wire add cost per additional 300 mm (1') per package.

**Ordering Example:** 5LRTC-TT-K-20-72, 5-pack of standard size thermocouples with 2 m (80") of 20 AWG PFA insulated wire.

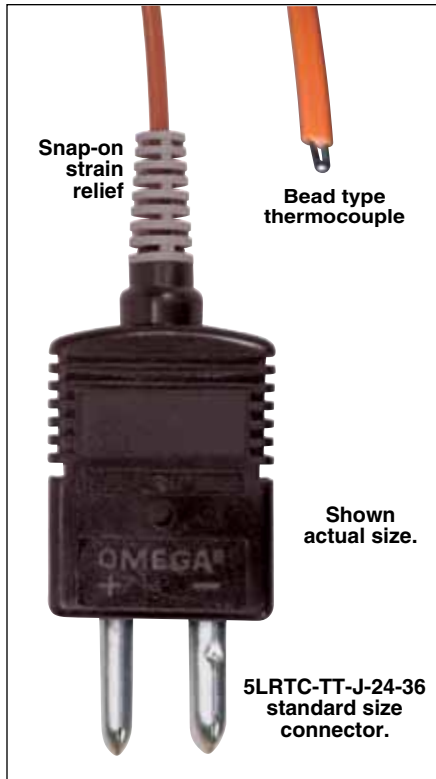

# Ready-Made Insulated Thermocouples

## with Standard or Miniature Size Spool Caddies


Custom Lengths, Insulations, and Configurations Available!

### 5SC/5LSC 5-Pack




- ✓ Available from Stock in Convenient 5-Packs
- ✓ NIST Calibration Available
- ✓ Type J, K, T, and E Thermocouples
- ✓ Glass Braid Insulation Has Max Service Temp of 480°C (900°F)
- ✓ PFA Insulation Has Max Service Temp of 260°C (500°F)
- ✓ Kapton® Insulation Has Max Service Temp of 260°C (500°F)
- ✓ Stocked in 1 and 2 m (40 and 80") Lengths†
- ✓ Max Service Temp for Connector Body and Spool Caddy: 220°C (425°F)

Fine 40-Gage PFA Insulated Thermocouples

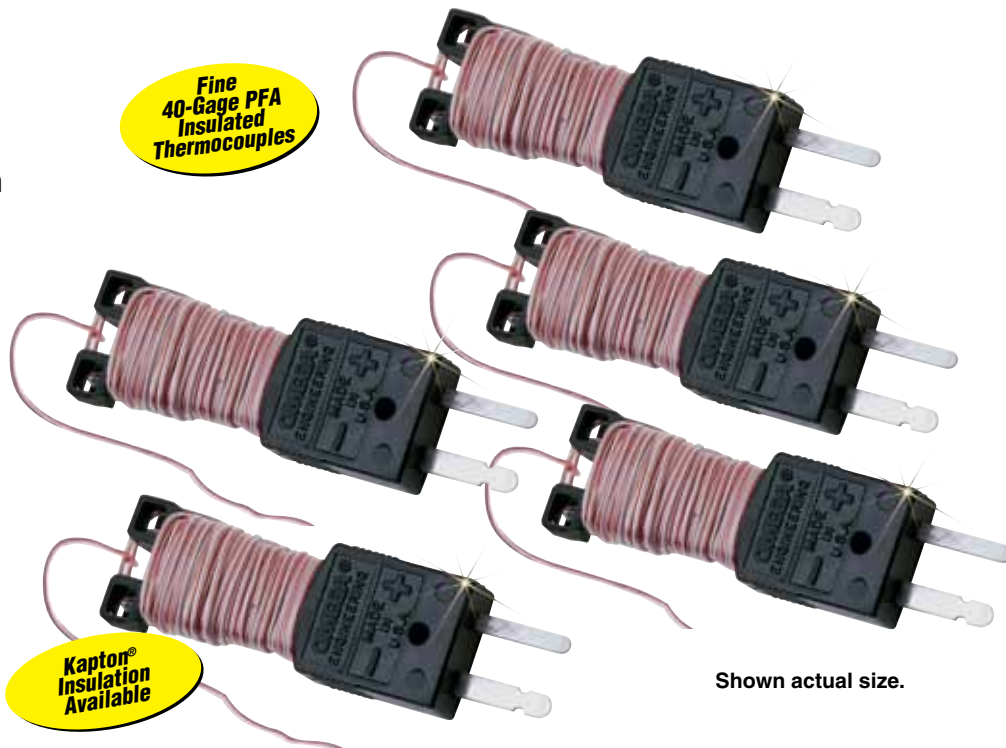


Kapton® Insulation Available

Shown actual size.

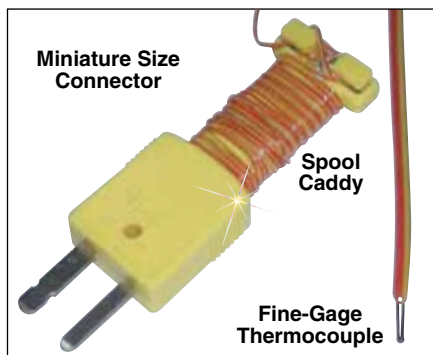

Spool caddy provides a convenient way to store thermocouples.

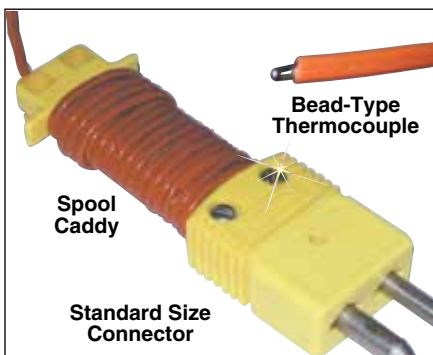

Both connectors shown smaller than actual size.

### Miniature SMP Spool Caddy Thermocouples

To Order			
Model Number** ANSI Color Code	AWG Gage	Diameter mm (inch)	Insulation
5SC-GG-(*)-30-(**)	30	0.25 (0.010)	Glass Braid
5SC-TT-(*)-30-(**)	30	0.25 (0.010)	PFA
5SC-TT-(*)-36-(**)	36	0.13 (0.005)	PFA
5SC-TT-(*)-40-(**)	40	0.076 (0.003)	PFA
5SC-KK-(*)-30-(**)	30	0.25 (0.010)	Kapton

### Standard OST Spool Caddy Thermocouples

Model Number ANSI Color Code	AWG Gage	Diameter mm (inch)	Insulation
5LSC-GG-(*)-20-(**)	20	0.81 (0.032)	Glass Braid
5LSC-GG-(*)-24-(**)	24	0.51 (0.020)	Glass Braid
5LSC-TT-(*)-20-(**)	20	0.81 (0.030)	PFA
5LSC-TT-(*)-24-(**)	24	0.51 (0.020)	PFA
5LSC-KK-(*)-20-(**)	20	0.81 (0.032)	Kapton
5LSC-KK-(*)-24-(**)	24	0.51 (0.020)	Kapton

\* Insert calibration J, K, T or E. \*\* Specify length: insert "36" for 1 m or "72" for 2 m length. † Consult Sales for additional lengths.

Note: Add cost per additional 300 mm (1') per package of 5 for GG or TT wire. For KK wire add cost per additional 300 mm (1') per package.

Ordering Examples: 5SC-TT-K-36-72, 5-pack of Type K mini SMP spool caddy thermocouples with 2 m (80") 36 AWG PFA insulated wire.

5LSC-GG-K-20-72, 5-pack of Type K standard size spool caddy thermocouples with 2 m (80") 20 AWG glass braid insulated wire.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for Omega manufacturer:*

Other Similar products are found below :

[NHX-U-M](#) [PX309-2KG5V](#) [PX319-200GI](#) [88007K](#) [88309K](#) [ON-403-PP](#) [P-L-1/10-1/8-6-0-T-3](#) [LC201-50](#) [OTP-U-F](#) [W5W26-010-ROHS](#)  
[HMPW-TI-M-ROHS](#) [M12-J-S-F-FM](#) [LCWD-20K](#) [RTD-850M](#) [OS137A-2-K-100FT](#) [PX3005-005AI](#) [LVU712-B](#) [CN616A](#) [STD-HL](#)  
[OS36SM-APJ](#) [OS36SM-MR](#) [LCM302-200N](#) [OSTW-CC-K-M](#) [OSTW-J-F](#) [SMPW-E-M](#) [SMPW-U-M](#) [KHXL-18G-RSC-12](#) [PX309-500G5V](#)  
[PX319-015GI](#) [PX359-150GI](#) [PX409-015CGUSBH](#) [PX409-5.0KGUSBH](#) [SA1-RTD-4W-120](#) [88221K-RE](#) [88402K](#) [LVC-E51](#) [RSC-K-1-4-4](#)  
[TECK25-9](#) [DP32PT-330](#) [RTD-2-F3105-36-G](#) [LCKD-10](#) [LC201-25](#) [DPI16-DC](#) [PX3005-005GI](#) [PX633-CLAMP](#) [PX633-M20](#) [PX633-WEIGHT](#) [OM-CP-MICROTEMP](#) [OS100-MB](#) [SHX-J-F](#)