
## SANITARY TEMPERATURE SENSORS

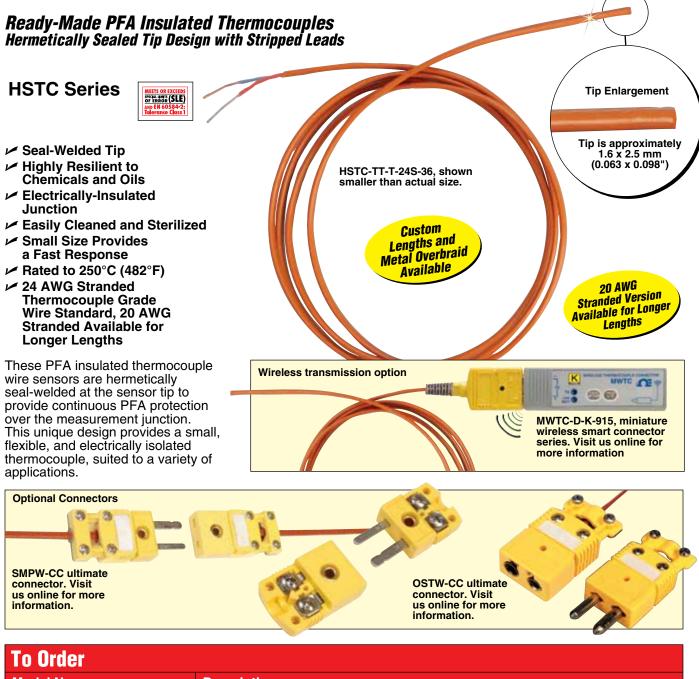

Model No.	Description
HSTC-TT-(*)-24S-36	Hermetically sealed tip thermocouple, 1 m (40"), stripped ends
HSTC-TT-(*)-24S-72	Hermetically sealed tip thermocouple, 2 m (80"), stripped ends
HSTC-TT-(*)-24S-120	Hermetically sealed tip thermocouple, 3 m (120"), stripped ends
HSTC-TT-(*)-24S-36-SMPW-CC	Hermetically sealed thermocouple, 1 m (40"), ultimate SMPW male with cable clamp
HSTC-TT-(*)-24S-72-SMPW-CC	Hermetically sealed thermocouple, 2 m (80"), ultimate SMPW male with cable clamp
HSTC-TT-(*)-24S-120-SMPW-CC	Hermetically sealed thermocouple, 3 m (120"), ultimate SMPW male with cable clamp

\* Insert calibration J, K, T, or E.

For additional cost 300 mm (12") of TT wire. To order thermocouple with full size connector, replace "SMPW" in the model number with "OSTW", no additional charge. To order 20 AWG stranded thermocouple for longer lengths, replace "24S" in the model with "20S" for additional cost. Ordering Example: HSTC-TT-K-24S-36-SMPW-CC, 1 each, PFA insulated thermocouple, Type K calibration (CHROMEGA®-ALOMEGA®), 24 stranded AWG, 1 m (40") L, ultimate mini male connector with strain relief.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Omega manufacturer:

Other Similar products are found below :

 NHX-U-M
 PX309-2KG5V
 PX319-200GI
 88007K
 88309K
 ON-403-PP
 P-L-1/10-1/8-6-0-T-3
 LC201-50
 OTP-U-F
 W5W26-010-ROHS

 HMPW-TI-M-ROHS
 M12-J-S-F-FM
 LCWD-20K
 RTD-850M
 OS137A-2-K-100FT
 PX3005-005AI
 LVU712-B
 CN616A
 STD-HL

 OS36SM-APJ
 OS36SM-MR
 LCM302-200N
 OSTW-CC-K-M
 OSTW-J-F
 SMPW-E-M
 SMPW-U-M
 KHXL-18G-RSC-12
 PX309-500G5V

 PX319-015GI
 PX359-150GI
 PX409-015CGUSBH
 PX409-5.0KGUSBH
 SA1-RTD-4W-120
 88221K-RE
 88402K
 LVC-E51
 RSC-K-1-4-4

 TECK25-9
 DP32PT-330
 RTD-2-F3105-36-G
 LCKD-10
 LC201-25
 DP116-DC
 PX3005-005GI
 PX633-CLAMP
 PX633-M20
 PX633-WEIGHT

 WEIGHT
 OM-CP-MICROTEMP
 OS100-MB
 SHX-J-F
 DP116-DC
 PX3005-005GI
 PX633-CLAMP
 PX633-M20
 PX633