


Magnet Mount Pt100, RTD Sensors


PRMAG Series

- ✓ Measure Surface Temperature of Ferrous Materials
- ✓ Spring-Mounted Probe
- ✓ 100 Ω Class A Din Platinum Element
- ✓ 4-Wire Construction Standard
- ✓ Powerful 6 kg (13 lb) Pull Magnet
- ✓ Wide-Range of Leads Available

OMEGA's magnetic-mount temperature sensors are available with a wide range of lead wire insulations and terminations. Maximum temperature is 400°C (752°F). Select the version from the table below that best meets your needs.

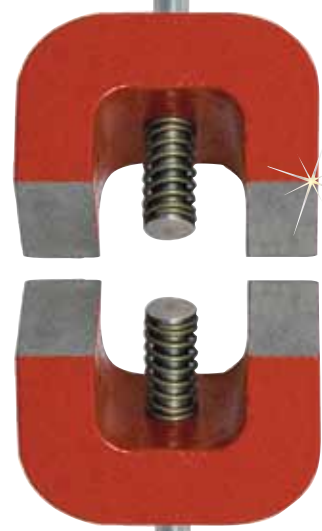

PRMAG-2-100-A-S-1M shown actual size.

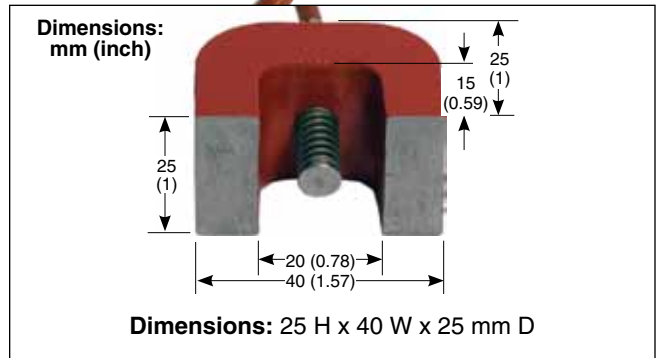

To Order			
Model No.	Accuracy	Cable	Cable Length
PRMAG-2-100-A-P-1M	Class A	PVC (100°C maximum)	1 m (40")
PRMAG-2-100-A-T-1M		PFA (250°C maximum)	
PRMAG-2-100-A-G-1M		Fiberglass (400°C maximum)	
PRMAG-2-100-A-GS-1M		Fiberglass with SST braid (400°C maximum)	
PRMAG-2-100-A-PS-1M		PVC with tinned copper braid (100°C maximum)	
PRMAG-2-100-A-TS-1M		PFA with SST overbraid (200°C maximum)	
PRMAG-2-100-A-S-1M		Silicone Rubber (200°C maximum)	

Note: For cable lengths greater than 1 meter, change length in model number to required length for an additional cost per meter: add cost per meter of PVC; add cost per meter of silicone; add cost per meter PFA; add cost per meter of fiberglass; add cost per meter of SST braided fiberglass; add cost per meter of braided PVC; add cost per meter of SST braided PFA cable. To add a connector termination, add cost for "OTP", "MTP" or TA3F connectors.

Ordering Example: PRMAG-2-100-A-P-1M, magnet mount probe with Class A Pt100 element and 1 m (40') of PVC insulated wire, terminated with stripped leads.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Omega manufacturer:

Other Similar products are found below :

[NHX-U-M](#) [PX309-2KG5V](#) [PX319-200GI](#) [88007K](#) [88309K](#) [ON-403-PP](#) [P-L-1/10-1/8-6-0-T-3](#) [LC201-50](#) [OTP-U-F](#) [W5W26-010-ROHS](#)
[HMPW-TI-M-ROHS](#) [M12-J-S-F-FM](#) [LCWD-20K](#) [RTD-850M](#) [OS137A-2-K-100FT](#) [PX3005-005AI](#) [LVU712-B](#) [CN616A](#) [STD-HL](#)
[OS36SM-APJ](#) [OS36SM-MR](#) [LCM302-200N](#) [OSTW-CC-K-M](#) [OSTW-J-F](#) [SMPW-E-M](#) [SMPW-U-M](#) [KHXL-18G-RSC-12](#) [PX309-500G5V](#)
[PX319-015GI](#) [PX359-150GI](#) [PX409-015CGUSBH](#) [PX409-5.0KGUSBH](#) [SA1-RTD-4W-120](#) [88221K-RE](#) [88402K](#) [LVC-E51](#) [RSC-K-1-4-4](#)
[TECK25-9](#) [DP32PT-330](#) [RTD-2-F3105-36-G](#) [LCKD-10](#) [LC201-25](#) [DPI16-DC](#) [PX3005-005GI](#) [PX633-CLAMP](#) [PX633-M20](#) [PX633-WEIGHT](#) [OM-CP-MICROTEMP](#) [OS100-MB](#) [SHX-J-F](#)