
## Heavy-Duty Washer Thermocouple Armored Style

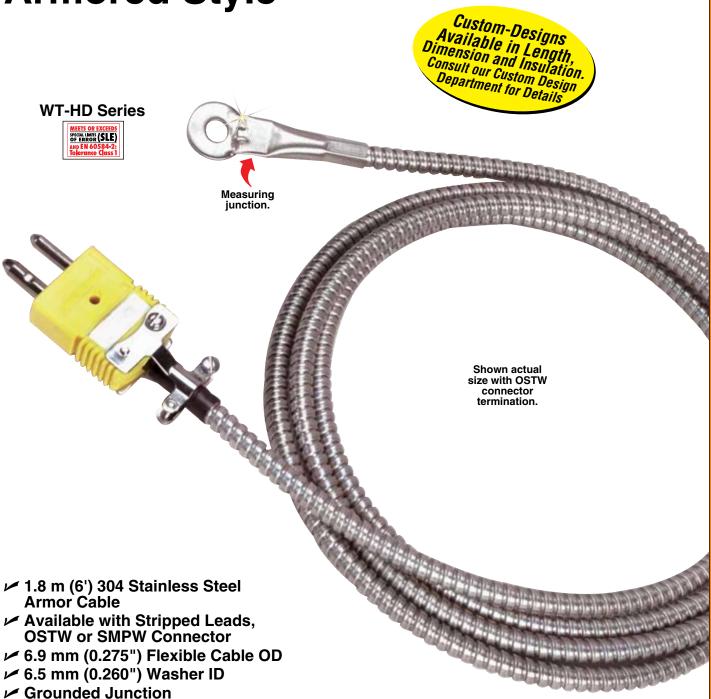

Rugged thermocouple, for surface mount applications, has a washer mounting surface and an overall dimension of 17.3 mm (0.680") OD, with a 6.6 mm (0.260") mounting hole of 304 SS material. Attached to the mounting surface: 1.8 m (6') of 304 SS flexible armor cable with stripped wire ends. Armor cable has 6.9 mm (0.275") OD, with 1.78 mm (0.070") washer thickness. Standard male connectors are available for cold-end termination. Rated to 480°C (900°F) for Type K only.

To Order Visit omega.com/wt-hd for Pricing and Details	
Model No. ANSI Color Code	Termination
WT(*)-HD-72-S	Stripped leads
WT(*)-HD-72-OSTW-M	OSTW connector
WT(*)-HD-72-SMPW-M	SMPW connector

<sup>\*</sup> Specify calibration: **J, K, T, N** or **E**. J = Iron-Constantan, T = Copper-Constantan, K = CHROMEGA®-ALOMEGA®,

E = Chromel-Constantan, N = Nicrosil-Nisil.

For lead wire lengths over 1.8 m (72") there is an additional cost per 300 mm (12"), please modify model number.

Ordering Example: WTK-HD-72-S, heavy-duty washer thermocouple, Type K, 1.8 m (6') cable.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Omega manufacturer:

Other Similar products are found below:

NHX-U-M PX309-2KG5V PX319-200GI 88007K 88309K ON-403-PP P-L-1/10-1/8-6-0-T-3 LC201-50 OTP-U-F W5W26-010-ROHS
HMPW-TI-M-ROHS M12-J-S-F-FM LCWD-20K RTD-850M OS137A-2-K-100FT PX3005-005AI LVU712-B CN616A STD-HL
OS36SM-APJ OS36SM-MR LCM302-200N OSTW-CC-K-M OSTW-J-F SMPW-E-M SMPW-U-M KHXL-18G-RSC-12 PX309-500G5V
PX319-015GI PX359-150GI PX409-015CGUSBH PX409-5.0KGUSBH SA1-RTD-4W-120 88221K-RE 88402K LVC-E51 RSC-K-1-4-4
TECK25-9 DP32PT-330 RTD-2-F3105-36-G LCKD-10 LC201-25 DP116-DC PX3005-005GI PX633-CLAMP PX633-M20 PX633-WEIGHT OM-CP-MICROTEMP OS100-MB SHX-J-F