

CP1W-ETN01-US

CP1 Ethernet Adapter


Low Cost Ethernet Adapter for CP1 Series Micro PLCs

The CP1W-ETN01-US is a low cost adapter that allows Ethernet communications to the CP1H and CP1L PLCs with an available option board slot. Easily connect the PLC to a NS HMI, Data Acquisition Software or CX-Programmer via Ethernet communications.


Key Features and Benefits

- Easy Mounting The adapter mounts in an unused Option Board Slot of the CP1 PLC
- Supports 2 connections The CP1W-ETN01-US has been designed to allow 2 simultaneous Ethernet connections. An HMI (NS, NSJ, Indusoft) as well as a CX Programmer can communicate to a CP1H or CP1L with the adapter.
- Remote Maintenance Perform remote maintenance via an Intranet or the Internet for remote diagnostics to maximize production up-time and reduce operating and maintenance costs.
- **Data Acquisition** Use Indusoft or CX-Supervisor to easily monitor, control & store production data, alarms, recipes, messages from the PLC for improving product quality.
- Intelligent Slave Each PLC is a powerful motion controller* (CP1H 4 Axis, CP1L 2 Axis) with high speed interrupts, Real Time Clock, IEC61131-3 Programming, PID, Floating Point Math and is expandable with analog or digital I/O. The addition of an Ethernet option board turns the PLC into an Intelligent Slave.
 *Transistor models

Typical System Configuration

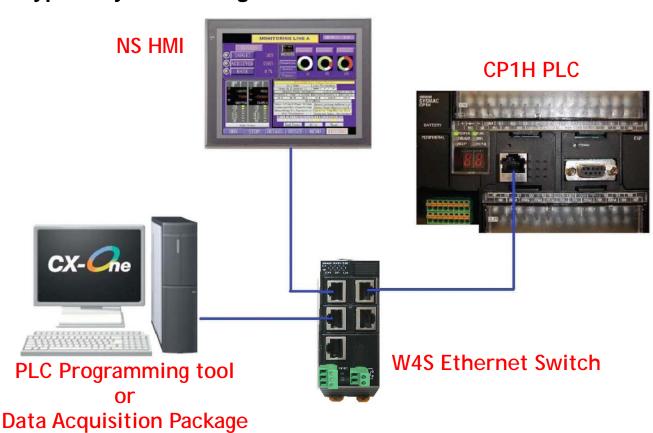

Intelligent Ethernet Slave

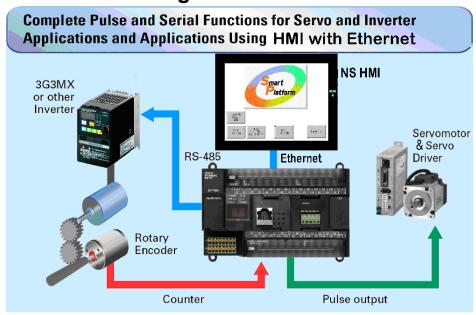

In the above example the CP1H PLC communicates to the NS HMI via Ethernet. The PLC can control 4 axis of servo motors while also reading 4 high speed encoder inputs. An additional option port can be added for communications to AC Drives, Temperature Controllers, or other devices. Built into the CPU are 24 Digital In, 16 Digital Out and 6 Analog I/O (4 configurable analog inputs & 2 configurable analog outputs). The PLC is expandable up to 320 digital I/O along with 2 CJ Special I/O modules (Analog, Motion, RFID, Network or Communication cards).

Specification

-	
Part Number	Description
CP1W-ETN01-US	CP1 Ethernet Adapter
Туре	100Base-TX (Can be used as 10Base-T)
Applicable PLCs	CP1L-L14, CP1L-L20, CP1L-M30, CP1L-M40, CP1L-M60, CP1H
Transmission Distance	100 m (distance between hub and node)
Number of units mounted	Two (both option ports can be used) (One for CP1L-L14,CP1L-L20)
Communication Method	Omron FINS
Maximum connections per device	Two connections (ie: CX-Programmer and NS HMI)
Number of nodes on FINS network	Up to 252 nodes possible
FINS Frame Length	500 bytes max
Default IP Address	192.168.250.11
Web Page IP Address Set-up	http://192.168.250.11 (Default)

Additional literature can be obtained from www.omron247.com.

W450 - CP1H Operation Manual

W451 - CP1L / CP1H Programming Manual

W462 - CP1L Operation Manual **W452** - NSJ Operation Manual

V227 - W4S Ethernet Switch



OMRON ELECTRONICS LLC • THE AMERICAS HEADQUARTERS

Schaumburg, IL USA • 847.843.7900 • 800.556.6766 • www.omron247.com

© 2009 Omron Electronics LLC

OMRON CANADA, INC. • HEAD OFFICE

Toronto, ON, Canada • 416.286.6465 • 866.986.6766 • www.omron247.com

OMRON ELETRÔNICA DO BRASIL LTDA • HEAD OFFICE

São Paulo, SP, Brasil • 55.11.2101.6300 • www.omron.com.br

OMRON ELECTRONICS MEXICO SA DE CV • HEAD OFFICE

Apodaca, N.L. • 52.811.156.99.10 • 001.800.556.6766 • mela@omron.com

Cat. No. P060I-E-01 **09/09**

OMRON ARGENTINA • SALES OFFICE

Cono Sur • 54.11.4783.5300

OMRON CHILE • SALES OFFICE

Santiago • 56.9.9917.3920

OTHER OMRON LATIN AMERICA SALES

54.11.4783.5300

Specifications are subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for omron manufacturer:

Other Similar products are found below:

44532-2050 XF2W-2415-1A LY1D-2-5S-AC120 CS1G-CPU43-E M22CAT1 61F-GP-NT AC110 M7E-01DGN2-B M7E-02DGN2 M7E-08DRN2 M7E-20DRN1 M7E-HRN2 M8PHWS D2HW-C233MR F03-02 SUS316 F150LTC20 F3SJ-A0245P30 F3STGRNSMC21M1J8 F3UVHM MG2-US-AC24 MK2EP-UA-AC6V MK2PNIAC240 MK310E-DC24 MKS2XTIN-11 DC110 MM4KPAC120NC MM4XPAC120 G2Q-184P-V-DC5 G2R-1114P-V-US-DC5 G2R13SNDDC24 G2RL-2A4-CF-DC48 G2U-114P-US-DC12 G2V-234P-US-DC48 G3CA-8H-AC100/110/120 G3PA-210B-US-DC24 G3PE525B3NDC1224 G3SD-Z01P-PD-US DC24 G3TA-ODX02S DC24 G4A-1A-P-DC24 G4Q-212S G4S-112P-US-B-DC24 G5C14DC12 G5E-C-H-DC12 G5E-V-DC12 G6J-2FS-Y-DC12 G6L-1P-DC3 G6N-2-Y-DC3 G6N-2-Y-DC9 G6R-1-DC5 G730ROC16BDC24 G730VID04DC24 G8J1C7TMFRDC12