

TO:Taidu

OMRON CORPORATION
Omron Switch & Devices Corporation

RoHS Directive Compliant Part

Prepared by M. Takahama	Checked by 	Approved by Y. Kuramitsu
--------------------------------	--------------------	---------------------------------

For Receipt For reference

PRODUCT SPECIFICATION

Description : Ultra Sub Miniature Basic Switch

Part Number : D2FC-F-K(50M)

- Please make a signature, stamp or other equivalent mark indicating your receipt on one copy of this sheet and return it to Omron on or before September 20, 2016. If you place an order of a product described in this sheet, you will be deemed to accept this specification.

Registration part number for customer

Type name :

Type number :

Signature, Stamp or Other Equivalent Mark (for receipt confirmation)

Release of Drawings

SUBMITTED

Jun. 17. 2016

OMRON

OMRON Corporation

Sales

Distribution

	Copy
Customer	
Sales ()	

PRODUCT SPECIFICATIONS	Description : Ultra Sub Miniature Basic Switch
	Part number : D2FC-F-K(50M)

1. Safety Standard

- 1.1 Approved standard —
1.2 File No. —

2. Structure

- 2.1 Outline drawing No. 9538718-1
2.2 Mechanism Snap action
2.3 Contact form Single pole single throw (SPST) C-NO
2.4 Protective structure IP40 Conforming to *IEC standard *IEC : International Electrotechnical Commission
2.5 Terminal For PCB board

3. Mechanical Characteristics

3.1 Operating characteristics (Initial value)

	Item	Abbr.	Unit	Specification value
1	Operating force	OF	N	0.44 to 0.74
2	Releasing force	RF	N	Min. 0.24
3	Pretravel	PT	mm	0.3±0.2
4	Overtravel	OT	mm	Min. 0.20
5	Movement differential	MD	mm	Max. 0.12
6	Operating position	OP	mm	6.9±0.2
7	Free Position	FP	mm	7.35 ⁰ _{-0.4}

3.2 Malfunction vibration

Malfunction shall be 1msec. max. when the following vibration is applied;

Amplitude : 1.5mm

Frequency : 10 to 55Hz

Cycle : 3 to 5 minutes

Direction : X, Y and Z axis

Time : 10 minute per axis

3.3 Vibration durability

No electrical or mechanical defect after the following vibration is applied;

Amplitude : 1.5mm

Frequency : 10 to 55Hz

Cycle : 3 to 5 minutes

Direction : X, Y and Z axis

Time : 2 hours per axis

3.4 Malfunction shock

Malfunction shall be 1msec. max. when the following shock is applied;

Shock : Max. 300m/s²

Direction : X, Y and Z axis

Time : 3 times per axis

3.5 Shock durability

No electrical or mechanical defect after the following shock is applied;

Shock : Max. 1000m/s²

Direction : X, Y and Z axis

Time : 10 times per axis

Condition common to Section 3.2 and 3.4

Applied voltage : DC 5V

Applied current : 100mA

Actuator position : Free position or Total travel position(detected by oscilloscope)

3.6 Actuator strength

No electrical or mechanical defect when the following force is applied to the actuator;

Direction : Actuator operation direction

Force : 10 times of the specified operating force (OF) 7.4N

Time : 1 minute

3.7 Permissible operating frequency

200 operations/minute max.

3.8 Permissible operating speed

1 to 500 mm/second

4. Electrical Characteristics

4.1 Switching capacity ratings

DC6V 1mA Resistive load

4.2 Contact resistance (at total travel position TTP)

Initial value $100\text{m}\Omega$ max. at 6VDC 0.1A by voltage drop method

4.3 Insulation resistance, Dielectric strength

Measuring part	Item	Insulation resistance (DC500V megger)	Dielectric strength (50/60Hz for 1 minute)	Remark
	Between terminals of the same polarity	$100\text{M}\Omega$ Min.	600V	
	Between each terminal and ground	$100\text{M}\Omega$ Min.	1500V	Using a separator

5. Environmental Characteristics

5.1 Heat resistance

No electrical or mechanical defect at the standard test condition after leaving at room temperature and humidity for about 1 hour, after soaking under the ambience of $65\pm 2^\circ\text{C}$ for 96 hours.

5.2 Cold resistance

No electrical or mechanical defect at the standard test condition after leaving at room temperature and humidity for about 1 hour, after soaking under the ambience of $-25\pm 2^\circ\text{C}$ for 96 hours.

There shall be no icing at a lower temperature range.

5.3 Humidity resistance

No electrical or mechanical defect at the standard test condition after leaving at room temperature and humidity for about 1 hour, after soaking under the ambience of $40\pm 2^\circ\text{C}$ and 90 to 95%RH for 96 hours.

5.4 Temperature cycle resistance

No electrical or mechanical defect at the standard test condition after 1 cycle of $-40\pm 2^\circ\text{C}$ and $85\pm 2^\circ\text{C}$ soaking (48 hours at each temperature)

6. Usage Environment

6.1 Ambient temperature range

-25 to $+65^\circ\text{C}$ 60%RH Max. (No dewing or icing)

6.2 Ambient humidity range

85%RH Max. (at $+0$ to $+65^\circ\text{C}$)

7. Durability

7.1 Electrical durability

No electrical or mechanical defect at the standard test condition when switching the rated load by 50,000,000 operations at the operating frequency of 120 operations/minute at the stroke of the specified OT value.

The contact resistance shall be 100Ω max. and the dielectric strength between terminals of the same polarity shall be excluded.

8. Standard Test Condition and Criteria

8.1 Standard test condition

Temperature : $20\pm 15^\circ\text{C}$ Humidity : $65\pm 20\%$ RH

8.2 Definition of "No electrical or mechanical defect"

Operating characteristics : Not exceeding $\pm 20\%$ of the specification value

Contact resistance : 4 times the initial specification value Max.

Insulation resistance : $10\text{M}\Omega$ Min.

Dielectric strength : Meeting the specification value

9. Correct Use

9.1 Stroke setting for switch

- Setting an operating dog in the direction where the actuator moves and detaching the dog from the actuator completely when the switch is at the free position (FP).
- The overtravel (OT) (0.2mm) is appropriate for the switch stroke setting.
- Avoiding an impact operation as much as possible as it can cause life deterioration.

9.2 Soldering work

- Do the soldering work under the conditions specified below.

	Condition	Standard	Remarks
Manual soldering	350°C 3 seconds Max.	30 to 40W	Do not apply an excessive force to the terminals during the soldering work.
Automated soldering	260°C 5 seconds Max.		The soldering time should be 3 seconds max. when the switch is mounted on a double-sided PCB (through-hole PCB). Control the liquid level of flux and solder not to exceed PCB.


Note : Do not apply an excessive wattage or too long heating, or do not operate the switch for 1 minute after heating. Otherwise, the switch characteristics may be deteriorated. Be sure to apply only the minimum required amount of flux. The switch may have a contact failure if flux enters inside the switch.

9.3 Usage/storage environment for switch

- Avoiding the location where a corrosive gas is generated or temperature changes suddenly, the ambience of high temperature or humidity, dusts and others.
- It is recommended that the switch should be inspected before use if it is stored for 3 to 6 months after the production, depending on the location.

9.4 Switch mounting

- Referring to the figure on the right for mounting-hole processing drawing.

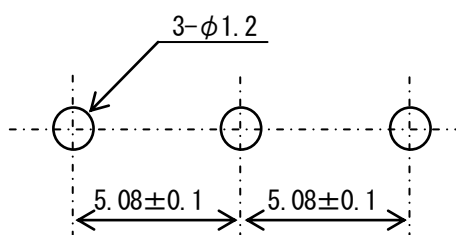

10. Warranty and Limited Warranty

(1) Definition

The definition of terms used in these Terms and Conditions are as follows:

- 1) *Usage conditions.* Usage conditions, rating, performance, operating environment, handling instructions, cautions, prohibited use, etc. of *Omron products* described in specifications, documentations or manuals.
- 2) *Customer application.* Application of *Omron products* by customers which include embedding and/or using *Omron products* in their parts/components, electronic substrates, devices, equipment or systems manufactured by customers.
- 3) *Fitness.* (a) Fitness, (b) performance, (c) non-infringement of third-party intellectual property, (d) compliance with laws and regulations and (e) conformity to various standards.

(2) Caution on Descriptions

Attention is required to the following points on descriptions in specifications.

- 1) Rated values and performance values are the product of tests performed for separate single conditions, including but not limited to temperature and humidity. It is not intended to warrant rated values and performance values for multiple combined conditions.
- 2) Reference data are provided for reference only. *Omron* does NOT warrant that *Omron products* work properly at all time in the range of reference data.
- 3) Application examples are provided for reference only. *Omron* does NOT warrant the *Fitness* of *Omron products* under such application.

- 4) *Omron* may discontinue the production of *Omron products* or change the specifications of them for the purpose of improving such products or other reasons entirely at its own discretion.

(3) Precautions

Please be aware of and accept the following when you introduce or use *Omron products*:

- 1) Please use *Omron products* in compliance with *usage conditions* including rating and performance.
- 2) Please confirm *fitness* of *Omron products* in your application and use your own judgment to determine the appropriateness of using them in such application. *Omron* shall not warrant the *fitness* of *Omron products* in customer application.
- 3) Please confirm that *Omron products* are properly wired and installed for their intended use in your overall system.
- 4) When using *Omron products*, please make sure to (i) maintain a margin of safety vis-à-vis the published rated and performance values, (ii) design to minimize risks to customer application in case of failure of *Omron products*, such as introducing redundancy, (iii) introduce system-wide safety measures to notify risks to users, and (iv) conduct regular maintenance on *Omron products* and *customer application*.
- 5) *Omron products* are designed and manufactured as general-purpose products for use in general industrial products. They are not intended to be used in the following applications. If you are using *Omron products* in the following applications, *Omron* shall not provide any warranty for such *Omron products*.
 - (a) Applications with stringent safety requirements, including but not limited to nuclear power control equipment, combustion equipment, aerospace equipment, railway equipment, elevator/lift equipment, amusement park equipment, medical equipment, safety devices and other applications that could cause danger/harm to people's body and life.
 - (b) Applications that require high reliability, including but not limited to supply systems for gas, water and electricity, etc., 24 hour continuous operating systems, financial settlement systems and other applications that handle rights and property.
 - (c) Applications under severe condition or in severe environment, including but not limited to outdoor equipment, equipment exposed to chemical contamination, equipment exposed to electromagnetic interference and equipment exposed to vibration and shocks
 - (d) Applications under conditions and environment not described in specification
- 6) In addition to the applications listed from (a) to (d) above, *Omron products* are not intended for use in automotive applications (including two wheel vehicles). Please do NOT use *Omron products* for automotive applications. Please contact *Omron* sales staff for products for automotive use.

(4) Warranty Terms and Conditions

The terms and conditions for warranty of *Omron products* are as follows:

- 1) Warranty period: One year after the purchase.
- 2) Coverage: *Omron* will provide free replacement of the malfunctioning *Omron products* with the same number of replacement/alternative products.
- 3) Exceptions: *Omron* will not cover *Omron products* under its warranty if the cause of the malfunction falls under any of the following.
 - (a) Usage in a manner other than the original intended use for the *Omron products*.
 - (b) Usage outside of the *usage conditions*.
 - (c) Modification or repair made to the *Omron* product by other than *Omron* personnel.
 - (d) Software program embedded by other than *Omron* or usage of such software.
 - (e) Cause which could not have been foreseen with the level of science and technology at the time of shipping from *Omron*.
 - (f) Causes originating from other than *Omron* or *Omron products* (including force majeure such as but not limited to natural disasters).




(5) Limitation of Liability

The warranty set out in these Terms and Conditions is the whole and sole liability for *Omron products*. There are no other warranties, expressed or implied. *Omron* and the distributors of *Omron products* are not liable for any damages which may arise from or be related to *Omron products*.

(6) Export Controls

Customers of *Omron products* shall comply with all applicable laws and regulations of Japan and/or other relevant countries with regard to security export control, when exporting *Omron products* and/or technical documents or providing such products and/or documents to a non-resident. *Omron* may not provide customers with *Omron* products and/or technical documents should they fail to comply with such laws and regulations.

A	Sep.25' 15	Newly prepared	K.Osaki	K. Izawa	A.Ikuta
Code	Date	Revision content	Issue	Check	Approval

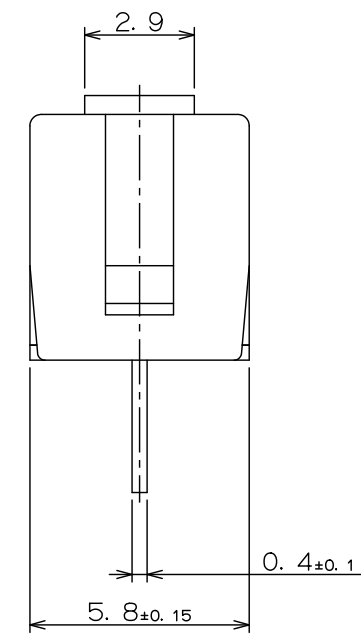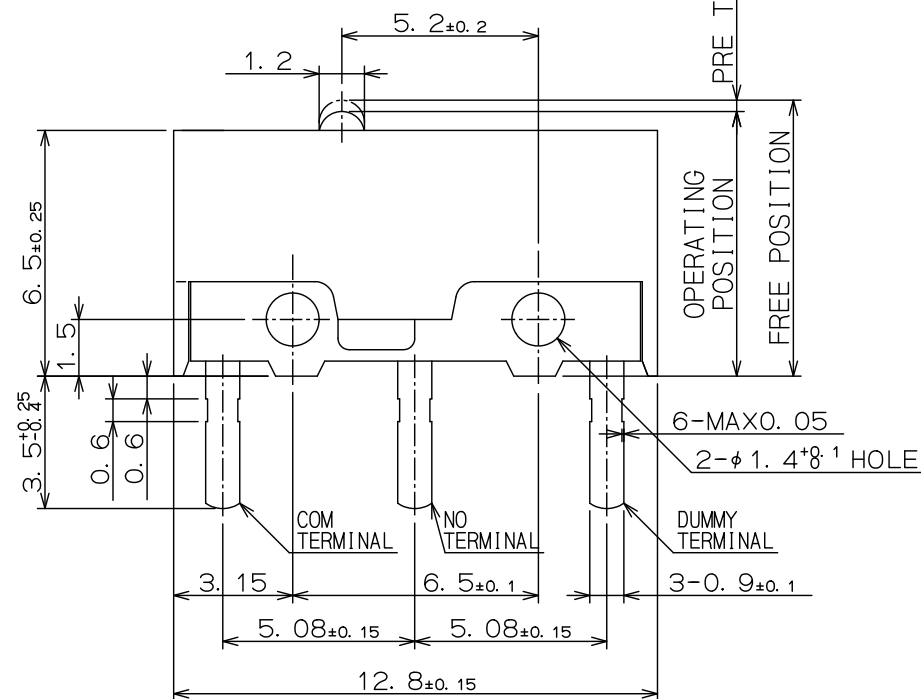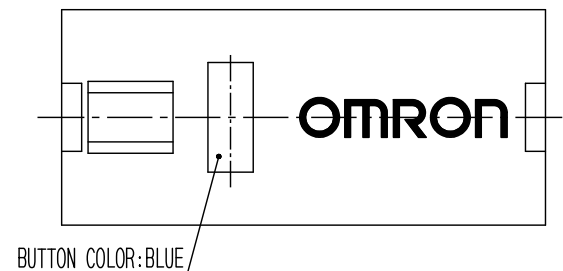

1. OPERATING CHARACTERISTICS

ITEM	SPEC.
OPERATING FORCE	0.44~0.74N
RELEASE FORCE	0.24N MIN
PRE TRAVEL	0.3±0.2 mm
OVER TRAVEL	0.2 mm MIN
MOVEMENT DIFFERENTIAL	0.12 mm MAX
OPERATING POSITION	6.9±0.2 mm
FREE POSITION	7.35 ⁰ -0.4 mm

2. ELECTRICAL RATINGS

1mA 6VDC (RESISTIVE LOAD)

3. CONTACT FORM

COM-NO

Note. Dummy terminal should not be connected to any circuit.

					MATERIAL	SCALE 5:1	TYPE D2FC-F-K(50M) ULTRA SUBMINIATURE BASIC SWITCH OUTLINE DRAWING	
					FINISH			
					TOLERANCES UNLESS SPECIFIED	DESIGNED OCT. 05' 15	3RD ANGLE	DRWG NO. 9538718-1 A
					±0.4mm	CHECKED Y. KURAMITSU		
SYM	DATE	E/C CONTENTS	E/C NO.	SIGN	APPROVED OES PE Oct. 15, 2015 HYAMADA		SHEET 1/1	DESIGNED FOR

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pushbutton Switches](#) category:

Click to view products by [Omron](#) manufacturer:

Other Similar products are found below :

[8971K1133](#) [LW2L-M1C20M-A](#) [M22-D-R-GB0/K11](#) [67021K512](#) [701PB580](#) [7199K101](#) [810K12910](#) [810KSV30B](#) [FLT 2U EE 01A](#)
[MML21EA2ADK](#) [MML21KA3ABK](#) [MML23KA3AC05K-001](#) [MML23KW3AA01W](#) [8418K2](#) [8442K3](#) [8450K1](#) [860K11911T01A](#) [861901](#)
[861K11911T01A07](#) [861K13810T00A14](#) [861K13911](#) [8646AB6X718UL](#) [9533CD4+U574+U4922](#) [99-450.837](#) [99-453.837](#)
[A2PMA1X03EC56](#) [A3A-7310](#) [A3A-7340](#) [12037A2ULCSA](#) [1203A2UL](#) [ABGW410-R](#) [1211390004](#) [ABN400-R](#) [121382](#) [1213C3](#) [HE3B-M2](#)
[1211500044](#) [121194](#) [1212MRA](#) [1232A6NF](#) [1241.1183.7047](#) [121489](#) [1223A2ULCSA](#) [1241.1183.8000](#) [1241.1183.8029](#) [D5P-MT4](#)
[13435AG](#) [13445AD29GX768](#) [AG23-L2](#) [AH165-2SGLG1TE3](#)