Pressure Sensor

E8MS/E8M

Four-channel Pressure Sensor Offering Versatile Functions and High Precision Without Errors

- The industry's smallest pressure sensor, compact, lightweight - ideal for robot arms or other moving components
- A highly sensitive minute-pressure sensor model detects very small differences in air pressure
- No wiring conduit required can be located for sensing in small places
- Simple display panel for efficient space-saving, though, providing large LEDs
- Easy sensitivity adjustment using the teach function and channel-to-channel copy function



Ordering Information

Sensors

Sensors

E8MS

	Pressure range	Output form	Model
Positive pressure	0 to 100 kPa		E8MS-01
	0 to 1 MPa	Linear output 1 to 5 V	E8MS-10
Negative pressure	0 to -101 kPa		E8MS-N0

E8M

	Pressure range	Output form	Model
Minute differential pressure sensor	Differential pressure from 0 to 1,000 Pa (0 to 0.145 psi) between positive and negative ports	Lineau autout data E.V.	E8M-A1
Positive pressure 0 to 1 MPa		Linear output 1 to 5 V	E8M-10
Negative pressure	0 to -101 kPa		E8M-N0

Controller

Supply voltage	Output form	Number of sensor inputs	Model
24 VDC	NPN open collector	4	K3C-MP8-T1Z
	MEN Open collector	2CH	K3C-DP8-T1Z

Note: 1 ch model available.

Accessories (Order Separately)

Sensor I/O Connectors

Applicable type	Shape	Model	Specifications	Quantity	Remarks
E8M		E89-M3 (see note)	4-pin connector with 3 m long cable		Supplied with one XS8A-0442 Pin Controller
E8MS		E89-M4	3-pin connector with 3 m long cable	1	Connector

Note: E8M-A1 does not require the Sensor I/O Connector.

Pin Controller Connector

Shape	Model	Fitting conductors size (mm)	Quantity	Minimum order unit	Remarks
	XS8A-0442	0.14 to 0.2	1	10	E89-M3 and E89-M4 supplied with one XS8A-0442 each

Note: Orders are accepted in multiples of the minimum order unit.

E8MS/E8M F-5

Power and output connector

Model Specifications		Quantity
K32-MP2W	7-pin connector with 2-m-long cable	1

Adapter

Shape	Model	Quantity	Minimum order unit	Remarks
	Y92F-30	1	10	One Adapter is attached to the K3C Controller.

Note: Orders are accepted in multiples of the minimum order unit.

Soft Cover

Shape	Model
	Y92A-48F1

Hard Cover

Shape	Model
	Y92A-48


Sensor and Controller Combinations

Use the Pressure Controllers in the following combinations. The E89-M3/M4 is required when using the Sensor as a single unit.

Model	E89-M3	E89-M4	K3C-MP8-T1Z K3C-DP8-T1Z	K32-MP2W
E8MS-01	Χ	0	0	0
E8MS-10	Χ	0	0	0
E8MS-N0	Χ	0	0	0
E8M-A1	Х	Х	0	0
E8M-10	0	Х	0	0
E8M-N0	0	Х	0	0

O:Required; X: Not required.


Sensor and Controller Connection

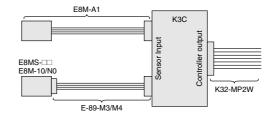



Dimensions (Unit: mm)


Sensors

Sensors

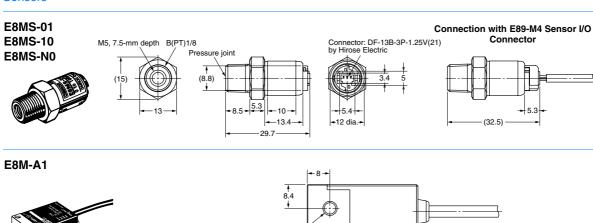

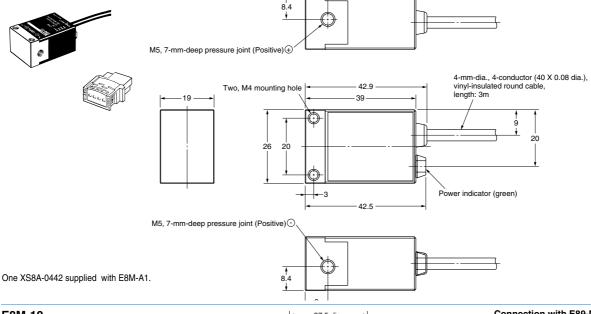

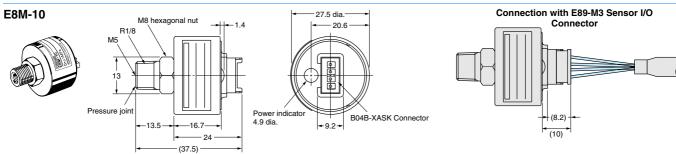

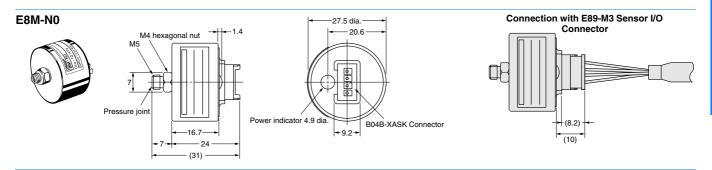



E8MS/E8M F-7

Controller

K3C-□P8-T1Z





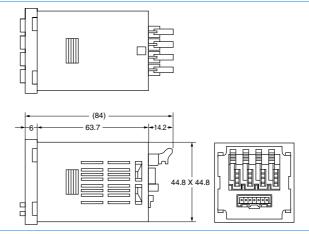

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Cat. No. F041-E2-02-X

In the interest of product improvement, specifications are subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for D-Sub Micro-D Connectors category:

Click to view products by Omron manufacturer:

Other Similar products are found below:

M243082311F M2430834F M24308/4-6F 65-1920-15 M83513/01-HN M83513/03-A10N M83513/03-B14C M83513/03-D09C M83513/03-D11N M83513/03-G02N M83513/03-G05N M83513/03-G08C M83513/03-G09N M83513/03-G12N M83513/03-H13N M83513/04-E15N M83513/04-G04C M83513/10-E01NP M83513/13-B01NP M83513/13-C01NN M83513/16-A01CP M83513/22-D01NP M83513/25-B01NP 6R2004A30F015 6R4006A28A120 703006A13F060 704002A03F200 705001A13F120 7-1532020-5 748567-1-P MDB1-31SH003 MDM-15PBS-L58 MDM-15PCBRM7T MDM-15PH003B-A174 75-068624-59S MDM-15PH034B MDM-15SH001L MDM-15SH004B MDM-21PH003K MDM-25PH003B-A174 MDM-25PHW01F-A174 MDM-37PH006L-A174 MDM-37PH048M5-A174 MDM-37SCBRP-A174 MDM-51PBS-L56 MDM-51PSF MDM-51SH003M7 MDM-51SSM7-A174 MDM-9PBSP-L58 MDM-9PH003M7