


G2RL-1A-E2-CV-HA

PCB Power Relay

Compact single pole Relay for High Current Load Switching & High Ambient Temperature

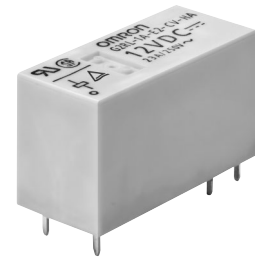

- High current 23 A switching surpassing standard G2RL models.
- Meets ambient operating temperature requirements of 105°C
- Low profile; 16.7 mm max. in height.
- Reinforced insulation between coil and contact with 10 kV Impulse voltage.
- Conforms to EN60335-1 of Safety of Household appliances.
- Clearance and creepage distances: 8 mm / 8 mm min.
- Coil insulation system: Class F (UL1446)

RoHS Compliant

Model Number Legend

G2RL-□□□-□□□
1 2 3 4 5 6

- | | |
|---|--|
| 1. Number of pole 1: 1 Pole | 4. Classification E2: High-capacity at 23 A |
| 2. Contact Form A: SPST-NO (1a) | 5. Special Requirement CV: Ambient operating temperature 105°C |
| 3. Enclosure Rating None: Flux protection | 6. Market Code HA: Home Appliance according to IEC/EN60335-1 |

Application Examples

- Home appliances
- Cooking top, Microwave Oven
- Industrial use
- HVAC

Ordering Information

| Classification | Contact form | Enclosure rating | Model | Rated coil voltage | Minimum packing unit |
|----------------------------------|--------------|------------------|------------------|---------------------------|----------------------|
| High-capacity & High-temperature | SPST-NO (1a) | Flux protection | G2RL-1A-E2-CV-HA | 5 VDC 12 VDC 24 VDC | 100 pcs. / tray |

Note: 1. When ordering, add the rated coil voltage to the model number.

Example: G2RL-1A-E2-CV-HA DC5

DC5 — Rated coil voltage

However, the notation of the coil voltage on the product case will be marked as □□VDC.

Note: 2. Place your order in tray (100 pcs./tray) units.

Ratings

Coil Ratings

| Rated voltage | Item Rated current (mA) | Coil resistance (Ω) | Must-operate voltage (V) | Must-release voltage (V) | Max. voltage (V) | Power consumption (mW) |
|---------------|----------------------------|---------------------|--------------------------|--------------------------|-------------------|------------------------|
| | | | | | | |
| 5 VDC | 80.0 | 62.5 | 75% max. | 10% min. | 130% (at 23°C) | Approx. 400 |
| 12 VDC | 33.3 | 360 | | | | |
| 24 VDC | 16.7 | 1,440 | | | | |

Note: 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.

Note: 2. The operating characteristics are measured at a coil temperature of 23°C.

Note: 3. The "Max. voltage" is the maximum voltage that can be applied to the relay coil.

Contact

| Classification | High-capacity & High-temperature type (resistive load) |
|------------------------|--|
| Item | Model |
| | G2RL-1A-E2-CV-HA |
| Contact type | Single |
| Contact material | Ag-Alloy (Cd free) |
| Rated load | 23 A at 250 VAC |
| Rated carry current | 23 A |
| Max. switching voltage | 250 VAC |
| Max. switching current | 23 A |

Characteristics

| Item | Classification | High-capacity & High-temperature type |
|-------------------------------|---------------------------------------|---|
| | Model | G2RL-1A-E2-CV-HA |
| Contact resistance *1 | | 100 mΩ max. |
| Operate time | | 15 ms max. |
| Release time | | 5 ms max. |
| Insulation resistance *2 | | 1,000 MΩ min. |
| Dielectric strength | Between coil and contacts | 5,000 VAC, 50/60 Hz for 1 min |
| | Between contacts of the same polarity | 1,000 VAC, 50/60 Hz for 1 min |
| Impulse withstand voltage | | 10 kV (1.2 × 50 μs) |
| Vibration resistance | Destruction | 10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude) |
| | Malfunction | 10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude) |
| Shock resistance | Destruction | 1,000 m/s ² |
| | Malfunction | Energized: 100 m/s ² , De-energized: 100 m/s ² |
| Durability | Mechanical | 20,000,000 operations (18,000 operation per hour) |
| | Electrical *3 (resistive load) | 100,000 operations at 250 VAC, 23 A, at 105°C (1s ON / 9s OFF) |
| Ambient operating temperature | | -40°C to 105°C (with no icing or condensation) |
| Ambient operating humidity | | 5% to 85% (with no icing or condensation) |
| Weight | | Approx. 12 g |

Note: Values in the above table are the initial values at 23°C.


*1. Measurement conditions: 5 VDC, 1 A, voltage drop method

*2. Measurement conditions: Measured at the same points as the dielectric strength using a 500 VDC ohmmeter.


*3. 360 operations per hour.

Engineering Data

● Maximum Switching Capacity

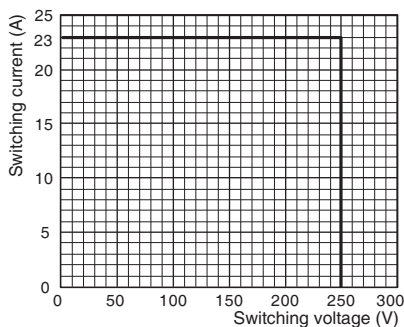


● Ambient Temperature vs. Maximum Coil Voltage

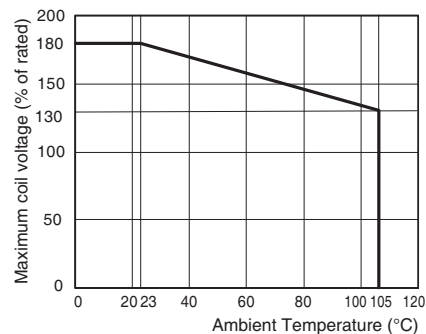


Note: The maximum coil voltage refers to the maximum value in a varying range of operating power voltage, not a continuous voltage.

● Shock Malfunction

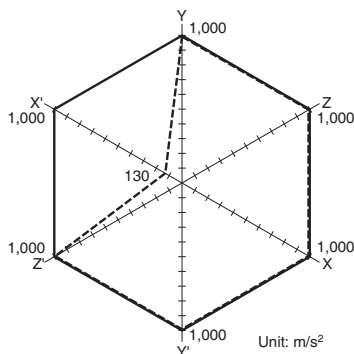


Test conditions: Shock is applied in ±X, ±Y, and ±Z directions three times each with without energizing the Relays to check the number of malfunctions.

Requirement: None malfunction
100 m/s²




● Ambient Temperature vs. Must Operate and Must Release Voltage

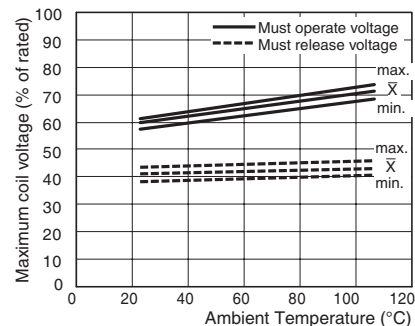

Dimensions

(Unit: mm)

G2RL-1A-E2-CV-HA

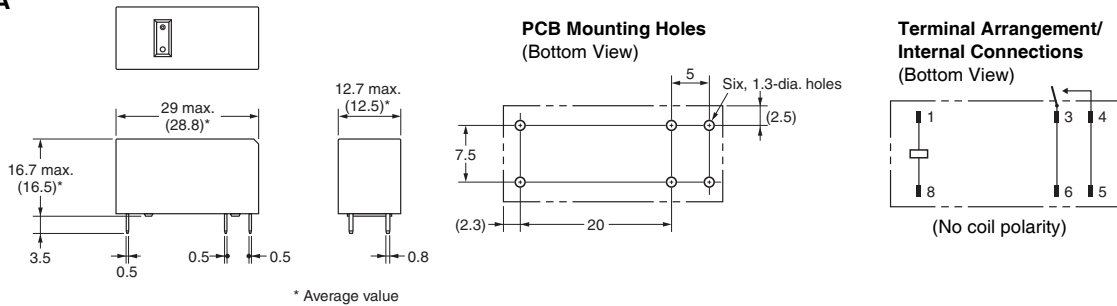

* Average value

Approved Standards

UL Recognized: (File No. E41643)

CSA Certified: (File No. LR31928)

| Model | Contact form | Coil ratings | Contact ratings | Number of test operations |
|------------------|--------------|--------------|---------------------------------|---------------------------|
| G2RL-1A-E2-CV-HA | SPST-NO (1a) | 5 to 24 V | 23 A, 250 VAC (Resistive) 105°C | 100,000 |

EN/IEC, TÜV Certified: (Certificate No. R50426950)

| Model | Contact form | Coil ratings | Contact ratings | Number of test operations |
|------------------|--------------|--------------|------------------------------|---------------------------|
| G2RL-1A-E2-CV-HA | SPST-NO (1a) | 5 to 24 V | 23 A, 250 VAC (cosφ=1) 105°C | 100,000 |

| | |
|---|--|
| Creepage distance | 8 mm min. |
| Clearance distance | 8 mm min. |
| Insulation material group | IIIa |
| Type of insulation coil-contact open contact circuit | Reinforced Micro disconnection |
| Rated insulation voltage | 250 V |
| Pollution degree | 3 |
| Rated voltage system | 250 V |
| Over voltage category | III |
| Category of protection according to IEC61810-1 | RTII (flux protection) |
| Glow wire according to IEC 60335-1 | GWT 750°C min. (IEC 60695-2-11/GWFI 850°C min (IEC 60695-2-12) |
| Tracking Index of relay base | PTI 250 V min. (housing parts) |
| Flammability class according to UL94 | V-0 |
| Coil Insulation system | F Class (UL 1446) |

Precautions

●Please refer to *PCB Relays Common Precautions* for correct use.

Electrical Appliance and Material Safety Law (Japan)

The G2RL-1A-E2 series is not compliant with the Electrical Appliance and Material Safety Law of Japan. Please pay careful attention to select a suitable relay for the application.

Please check each region's Terms & Conditions by region website.

OMRON Corporation

Electronic and Mechanical Components Company

Regional Contact

Americas

<https://www.components.omron.com/>

Asia-Pacific

<https://ecb.omron.com.sg/>

Korea

<https://www.omron-ecb.co.kr/>

Europe

<http://components.omron.eu/>

China

<https://www.ecb.omron.com.cn/>

Japan

<https://www.omron.co.jp/ecb/>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) category:

Click to view products by [Omron](#) manufacturer:

Other Similar products are found below :

[PCN-105D3MH,000](#) [59641F200](#) [LY1SAC110120](#) [5X827E](#) [5X837F](#) [5X840F](#) [5X842F](#) [5X848E](#) [LY2N-AC120](#) [LY2S-AC220/240](#) [LY2-US-AC120](#) [LY3-US-AC120](#) [LY4F-UA-DC12](#) [LY4F-UA-DC24](#) [LY4F-US-AC120](#) [LY4F-US-AC240](#) [LY4F-US-DC24](#) [LY4F-VD-AC110](#) [LYQ20DC12](#) [M115C60](#) [M115N010](#) [M115N0150](#) [6031007G](#) [603-12D](#) [61211T0B4](#) [61212T400](#) [61222Q400](#) [61243B600](#) [61243C500](#) [61243Q400](#) [61311BOA2](#) [61311BOA6](#) [61311BOA8](#) [61311C0A2](#) [61311COA1](#) [61311COA6](#) [61311F0A2](#) [61311QOA1](#) [61311QOA4](#) [61311T0D6](#) [61311TOA6](#) [61311TOA7](#) [61311TOB3](#) [61311TOB4](#) [61311U0A6](#) [61312Q600](#) [61312T400](#) [61312T600](#) [61313U200](#) [61313U400](#)