


Compact, Slim-profile SSR with Heat Sink, Offering Heater Control for 480-VAC Rated Loads

- Compact design achieved by optimizing heat sink shape.
- DIN track mounting possible in addition to screw mounting.
- Conforms to CE Marking, EN (VDE approval), UL, CSA, and VDE standards.
(UL pending for 480 V series)

 Refer to *Safety Precautions for All Solid State Relays*.



Model Number Structure

Model Number Legend

G3PB-□□□-□□□-□□
 1 2 3 4 5 6 7

1. Basic Model Name

G3PB: Solid State Relay

2. Rated Load Power Supply Voltage

2: 240 VAC
 5: 480 VAC

3. Applicable Load Current

15: 15 A
 25: 25 A
 35: 35 A
 45: 45 A

4. Terminal Type

B: Screw terminals

5. Number of Elements

Blank: Single-phase models

6. Construction

Blank: DIN track mounting and built-in heat sink

7. Certification

VD: Certified by CSA and VDE

Ordering Information

List of Models

Isolation method	Zero cross function	Operation indicator	Rated input voltage	Applicable load (See note.)	Model number
Phototriac coupler	Yes	Yes (yellow)	12 to 24 VDC	15 A, 100 to 240 VAC	G3PB-215B-VD DC12-24
				25 A, 100 to 240 VAC	G3PB-225B-VD DC12-24
				35 A, 100 to 240 VAC	G3PB-235B-VD DC12-24
				45 A, 100 to 240 VAC	G3PB-245B-VD DC12-24
				15 A, 200 to 480 VAC	G3PB-515B-VD DC12-24
				25 A, 200 to 480 VAC	G3PB-525B-VD DC12-24
				35 A, 200 to 480 VAC	G3PB-535B-VD DC12-24
45 A, 200 to 480 VAC	G3PB-545B-VD DC12-24				

Note: The applicable load current depends on the ambient temperature. For details, refer to *Load Current vs. Ambient Temperature* in Engineering Data.

Accessories (Order Separately)

Mounting Track	Dimensions	Part Number
	50 cm (1) x 7.3 mm (t)	PPF-50N
	1 m (1) x 7.3 mm (t)	PPF-100N
	1 m (1) x 16 mm (t)	PPF-100N2

Specifications

■ Ratings (at an Ambient Temperature of 25°C)

Input

Item	Common
Rated voltage	12 to 24 VDC
Operating voltage range	9.6 to 30 VDC
Rated input current	7 mA max.
Must operate voltage	9.6 VDC max.
Must release voltage	1 VDC min.

Output

Item	G3PB-215B-VD	G3PB-225B-VD	G3PB-235B-VD	G3PB-245B-VD	G3PB-515B-VD	G3PB-525B-VD	G3PB-535B-VD	G3PB-545B-VD
Rated load voltage	100 to 240 VAC (50/60 Hz)				200 to 480 VAC (50/60 Hz)			
Load voltage range	75 to 264 VAC (50/60 Hz)				180 to 528 VAC (50/60 Hz)			
Applicable load current (See note.)	0.1 to 15 A (at 40°C)	0.1 to 25 A (at 40°C)	0.5 to 35 A (at 25°C)	0.5 to 45 A (at 25°C)	0.1 to 15 A (at 40°C)	0.1 to 25 A (at 40°C)	0.5 to 35 A (at 25°C)	0.5 to 45 A (at 25°C)
Inrush current resistance (peak value)	150 A (60 Hz, 1 cycle)	220 A (60 Hz, 1 cycle)	440 A (60 Hz, 1 cycle)		150 A (60 Hz, 1 cycle)	220 A (60 Hz, 1 cycle)	440 A (60 Hz, 1 cycle)	
Permissible I ² t (half 60-Hz wave)	121 A ² s	260 A ² s	1,260 A ² s		128 A ² s	1,350 A ² s		6,600 A ² s
Applicable load (with Class-1 AC resistive load)	3 kW (at 200 VAC)	5 kW (at 200 VAC)	7 kW (at 200 VAC)	9 kW (at 200 VAC)	6 kW max. (at 400 VAC)	10 kW max. (at 400 VAC)	14 kW max. (at 400 VAC)	18 kW max. (at 400 VAC)


Note: The applicable load current varies depending on the ambient temperature. For details, refer to *Load Current vs. Ambient Temperature* in Engineering Data.

■ Characteristics

Item	G3PB-215B-VD	G3PB-225B-VD	G3PB-235B-VD	G3PB-245B-VD	G3PB-515B-VD	G3PB-525B-VD	G3PB-535B-VD	G3PB-545B-VD
Operate time	1/2 of load power source cycle + 1 ms max.							
Release time	1/2 of load power source cycle + 1 ms max.							
Output ON voltage drop	1.6 V (RMS) max.				1.8 V (RMS) max.			
Leakage current	10 mA max. (at 200 VAC)				20 mA max. (at 480 VAC)			
Insulation resistance	100 MΩ min. (at 500 VDC)							
Dielectric strength	2,500 VAC, 50/60 Hz for 1 min							
Vibration resistance	Destruction: 10 to 55 to 10 Hz, 0.375-mm single amplitude (Mounted to DIN track)							
Shock resistance	Destruction: 294 m/s ² (DIN track mounting)							
Ambient temperature	Operating: -30°C to 80°C (with no icing or condensation) Storage: -30°C to 100°C (with no icing or condensation)							
Ambient humidity	Operating: 45% to 85%							
Certified standards	UL508 CSA22.2 No. 14 EN60947-4-3				CSA22.2 No. 14 EN60947-4-3			
EMC	Emission: EN55011 Group 1 Class B Immunity: EN61000-6-2							
Weight	Approx. 240 g		Approx. 400 g		Approx. 240 g		Approx. 400 g	


Engineering Data

Input Voltage vs. Input Impedance and Input Voltage vs. Input Current



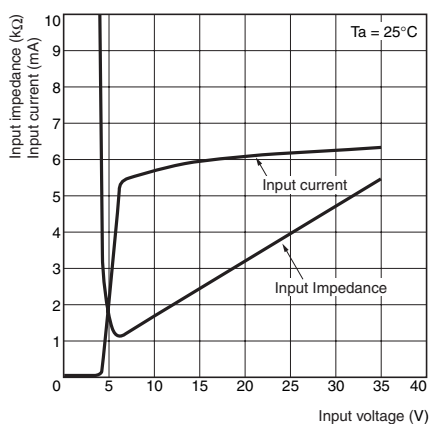


Load Current vs. Ambient Temperature

G3PB-215B-VD, PB-225B-VD
G3PB-515B-VD, G3PB-525B-VD

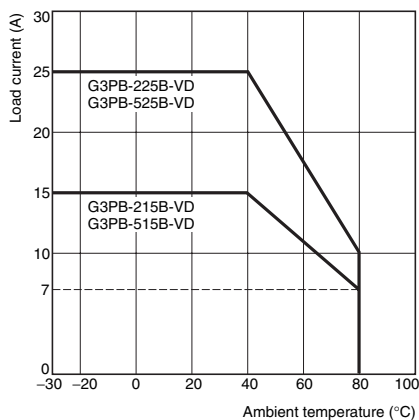

G3PB-235B-VD, PB-245B-VD
G3PB-535B-VD, G3PB-545B-VD

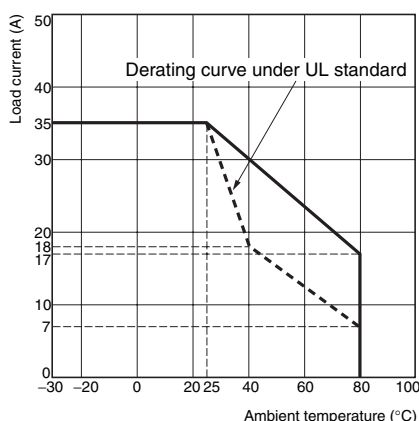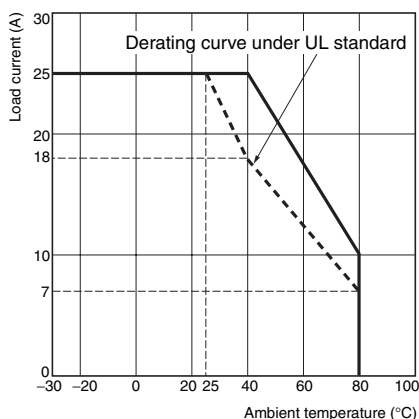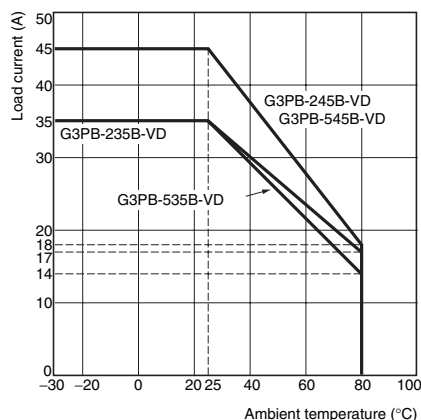


- Note:**
1. Please use proper ventilation and cooling as recommended by the instruction sheet packaged with the product.
 2. Please note that the derating curve above 18 A is applicable under the UL standard only with forced air cooling by fan.


One Cycle Surge Current: Non-repetitive

Keep the inrush current to below the inrush current resistance value (i.e., below the broken line) if it occurs repetitively.


G3PB-215B-VD, G3PB-515B-VD

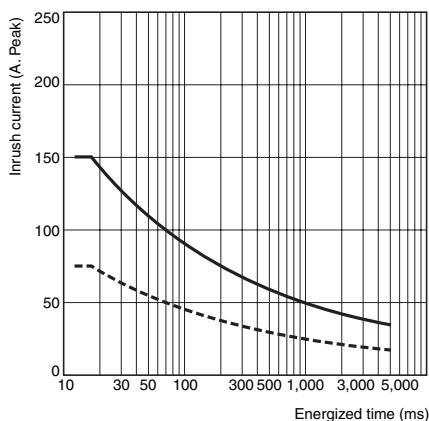

G3PB-225B-VD, G3PB-525B-VD

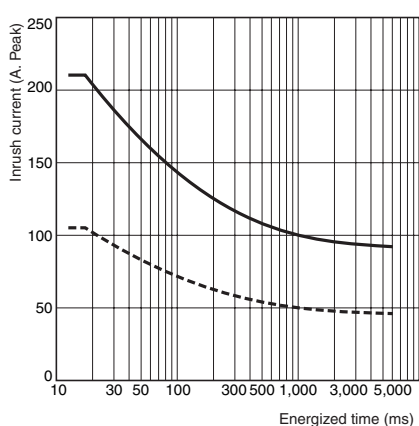


G3PB-235B-VD, G3PB-245B-VD
G3PB-535B-VD, G3PB-545B-VD

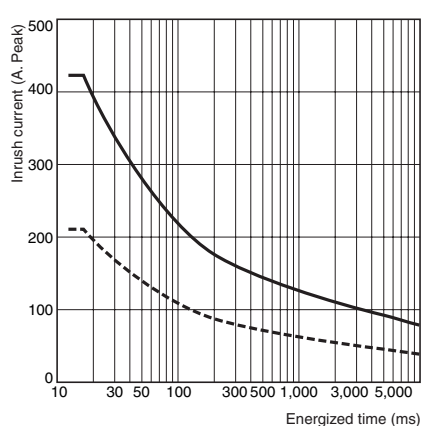


Close Mounting (3 or 8 Relays) (Refer to Safety Precautions for All G3PB Models.)


G3PB-215B-VD

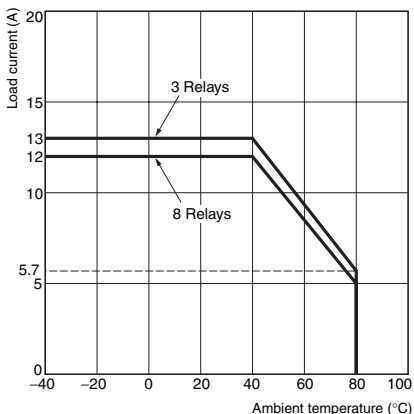


G3PB-225B-VD

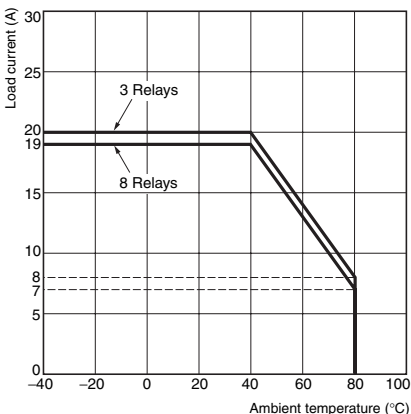


G3PB-235B-VD

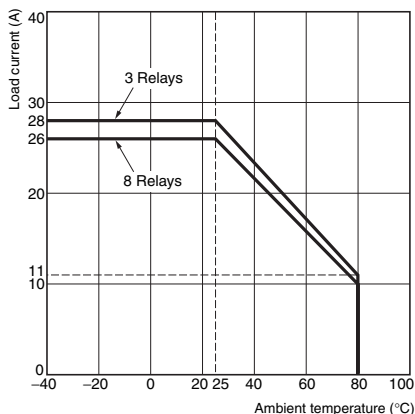


G3PB-245B-VD

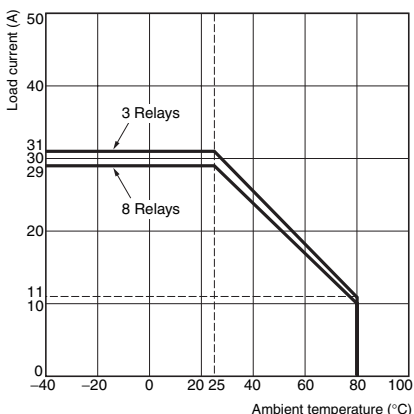


G3PB-515B-VD

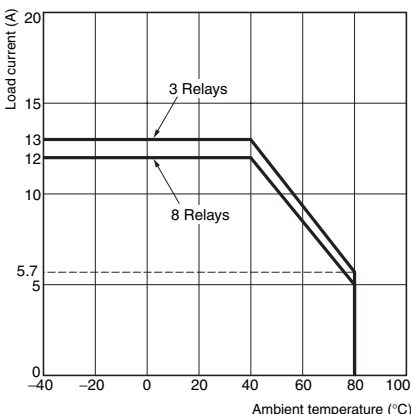


G3PB-525B-VD

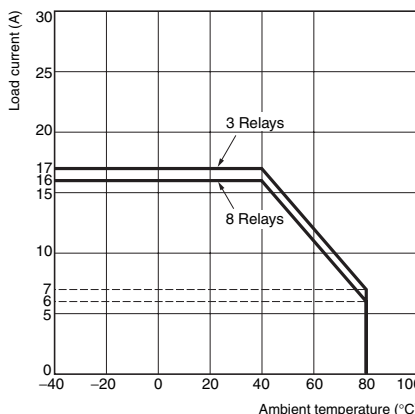


G3PB-535B-VD

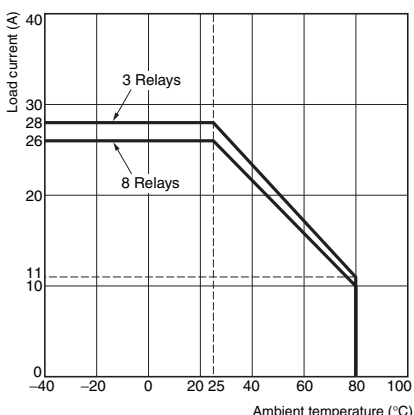

G3PB-545B-VD

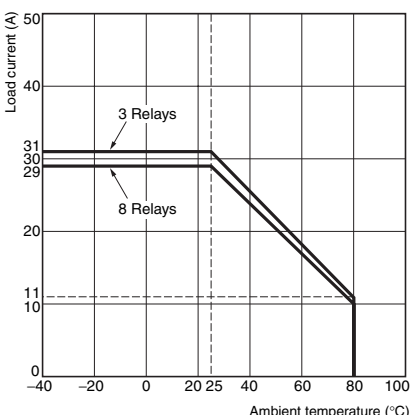

Example of Close Mounting for G3PB-525B-VD





Note: Close mounting of 3 Relays:
7 A at an ambient temperature of 80°C.
Close mounting of 8 Relays:
6 A at an ambient temperature of 80°C.

Dimensions

Note: All units are in millimeters unless otherwise indicated.




G3PB-215B-VD
G3PB-225B-VD
G3PB-515B-VD
G3PB-525B-VD

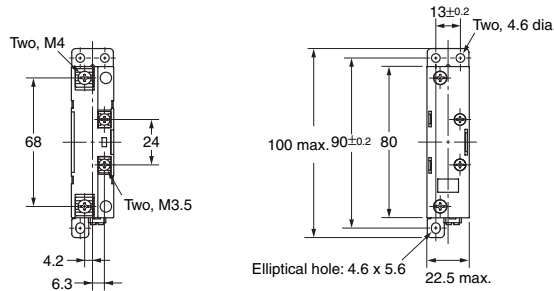



Note: Without terminal cover.

Note: With terminal cover.



Mounting Holes



Terminal Arrangement/Internal Circuit Diagram






G3PB-235B-VD
G3PB-245B-VD
G3PB-535B-VD
G3PB-545B-VD

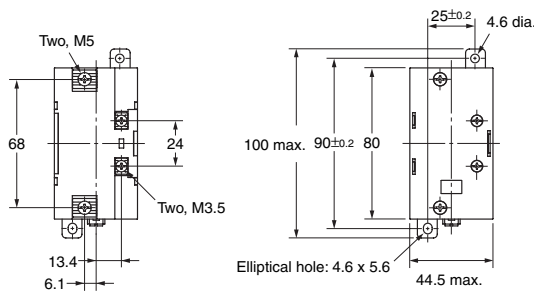



Note: Without terminal cover.

Note: With terminal cover.

Mounting Holes



Terminal Arrangement/Internal Circuit Diagram







Accessories (Order Separately)

Mounting Tracks

PFP-100N, PFP-50N

PFP-100N2

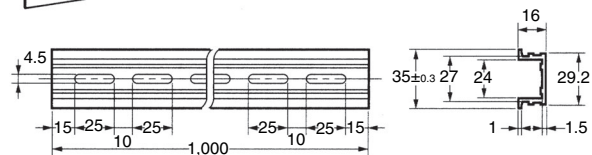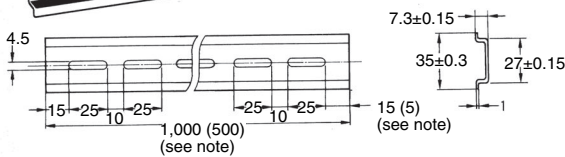

Note: Values in parentheses indicate dimensions for the PFP-50N.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

In the interest of product improvement, specifications are subject to change without notice.

Read and Understand This Catalog

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranty and Limitations of Liability

WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall the responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

Application Considerations

SUITABILITY FOR USE

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the products.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this catalog.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCTS ARE PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

PROGRAMMABLE PRODUCTS

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

Disclaimers

CHANGE IN SPECIFICATIONS

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the products may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased products.

DIMENSIONS AND WEIGHTS

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

PERFORMANCE DATA

Performance data given in this catalog is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

ERRORS AND OMISSIONS

The information in this document has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

2008.11

In the interest of product improvement, specifications are subject to change without notice.

OMRON Corporation
Industrial Automation Company

<http://www.ia.omron.com/>

(c)Copyright OMRON Corporation 2008 All Right Reserved.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Solid State Relays - Industrial Mount](#) category:

Click to view products by [Omron](#) manufacturer:

Other Similar products are found below :

[6225XXASRS-DC3](#) [D2440-C](#) [H10CA4890](#) [D4875C](#) [D53TP50DH-10](#) [1395831-1](#) [1616010-6](#) [BR312BY](#) [A-1326](#) [AQY210SXE01](#)
[AQY221N2SYD01](#) [AQY414SXE01](#) [26532764](#) [H10CA4850](#) [H12CA4890VL](#) [RA2410-D06](#) [D1202F](#) [D53TP50-10](#) [W230E-1-12](#) [W230T-3-](#)
[12](#) [W6125ASX-1](#) [W6225DSX-2](#) [W6240DSX-4](#) [W6240DTX-2](#) [1-1617030-3](#) [1-1617033-9](#) [1-1617033-7](#) [MS2-D2420](#) [MS2-D2430](#) [A-1440](#)
[4-1617080-0](#) [RJ1P60V50E](#) [RN1F48I50](#) [70.362.1028.0](#) [7-1393030-8](#) [Z5.509.0828.0](#) [W230E-2-5](#) [G3RV-SR700-D](#) [AC110](#) [G3RV-SR500-AL](#)
[AC100](#) [G3RV-SR500-D](#) [ACDC24](#) [G3RV-SR500-AL](#) [ACDC24](#) [G3RV-SR700-D](#) [ACDC24](#) [G3RV-SR700-AL](#) [ACDC24](#) [G3RV-SR500-D](#)
[DC12](#) [G3RV-SR700-A](#) [ACDC24](#) [G3RV-SR500-A](#) [ACDC24](#) [2912138](#) [2912141](#) [SSRDAC10](#) [1613353](#)