


G3VM-21UR

MOS FET Relays VSON package with Low Output Capacitance and ON Resistance type (Low C × R)

World's smallest New VSON Package with Low Output Capacitance and Low ON Resistance

- Load voltage 20V

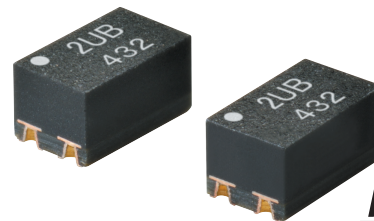

NEW

Note: The actual product is marked differently from the image shown here.


RoHS Compliant

Refer to "Common Precautions".

Application Examples

- Semiconductor test equipment
- Communication equipment
- Test & measurement equipment
- Data loggers

Package (Unit : mm, Average)



Note: The actual product is marked differently from the image shown here.

Model Number Legend

G3VM-□□□□□
1 2 3 4 5

- Load Voltage**
2: 20V
- Contact form**
1: 1a (SPST-NO)
- Package type**
U: VSON 4 pin
- Additional functions**
R: Low On-resistance

- Other informations**
When specifications overlap, serial code is added in the recorded order.

Ordering Information

Package type	Contact form	Terminals	Load voltage (peak value) *	Continuous load current (peak value) *	Packing/Tape cut		Packing/Tape & reel	
					Model	Minimum package quantity	Model	Minimum package quantity
VSON4	1a (SPST-NO)	Surface-mounting Terminals	20V	200mA	G3VM-21UR10	1 pc.	G3VM-21UR10(TR05)	500 pcs.
				450mA	G3VM-21UR1		G3VM-21UR1(TR05)	
				1,000mA	G3VM-21UR11		G3VM-21UR11(TR05)	

Note: When ordering tape packing, add "(TR05)" (500pcs/reel) to the model number.
Ask your OMRON representative for orders under 500 pcs. We can supply products with the tape already cut.
Tape-cut VSONs are packaged without humidity resistance. Use manual soldering to mount them.
Refer to common precautions.

* The AC peak and DC value are given for the load voltage and continuous load current.

Absolute Maximum Ratings (Ta = 25°C)


Item	Symbol	G3VM-21UR10	G3VM-21UR1	G3VM-21UR11	Unit	Measurement conditions
LED forward current	IF	30			mA	
LED forward current reduction rate	ΔIF/°C	-0.3			mA/°C	Ta≥25°C
LED reverse voltage	VR	5			V	
Connection temperature	TJ	125			°C	
Load voltage (AC peak/DC)	V _{OFF}	20			V	
Continuous load current (AC peak/DC)	I _o	200	450	1,000	mA	
ON current reduction rate	ΔI _o /°C	-2	-4.5	-10	mA/°C	Ta≥25°C
Pulse ON current	I _{op}	0.6	1.3	3	A	t=100ms, Duty=1/10
Connection temperature	TJ	125			°C	
Dielectric strength between I/O (See note 1.)	V _{I-O}	300			V _{rms}	AC for 1 min
Ambient operating temperature	Ta	-40~+85			°C	With no icing or condensation
Ambient storage temperature	T _{stg}	-40~+125			°C	
Soldering temperature	-	260			°C	10s

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

Electrical Characteristics (Ta = 25°C)

Item		Symbol	G3VM-21UR10	G3VM-21UR1	G3VM-21UR11	Unit	Measurement conditions	
Input	LED forward voltage	V _F	Minimum			V	I _F =10mA	
			Typical					
			Maximum					
	Reverse current	I _R	Maximum			μA	V _R =5V	
	Capacity between terminals	C _T	Typical			pF	V=0, f=1MHz	
	Trigger LED forward current	I _{FT}	Typical	1	0.6	–	mA	I _O =100mA
	Maximum	3						
Release LED forward current	I _{FC}	Minimum	0.1			mA	I _{OFF} =10μA	
Output	Maximum resistance with output ON	R _{ON}	Typical	3	0.8	0.18	Ω	I _F =5mA, t<1s, I _O =Continuous load current ratings
			Maximum	5	1.2	0.22		
	Current leakage when the relay is open	I _{LEAK}	Maximum	1			nA	V _{OFF} =20V
	Capacity between terminals	C _{OFF}	Typical	0.8	5	40	pF	V=0, f=100MHz, t<1s
	Maximum	1.1	12	–				
Capacity between I/O terminals	C _{I-O}	Typical	1		0.4	pF	f=1MHz, V _S =0V	
Insulation resistance between I/O terminals	R _{I-O}	Typical	10 ⁸			MΩ	V _{I-O} =500VDC, R _{oH} ≤60%	
Turn-ON time	t _{ON}	Typical	0.05	0.17	–	ms	I _F =5mA, R _L =200Ω, V _{DD} =10V (See note 2.)	
		Maximum	0.2	0.4	2			
Turn-OFF time	t _{OFF}	Typical	0.02			ms		
		Maximum	0.2	0.4	1			

Note: 2. Turn-ON and Turn-OFF Times



Recommended Operating Conditions


For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.


Item	Symbol		G3VM-21UR10	G3VM-21UR1	G3VM-21UR11	Unit
Load voltage (AC peak/DC)	V _{DD}	Maximum	16			V
Operating LED forward current	I _F	Minimum	5			mA
		Typical	7.5			
		Maximum	20			
Continuous load current (AC peak/DC)	I _O	Maximum	200	450	1,000	
		Minimum	–20			
Ambient operating temperature	T _a	Minimum	–20			°C
		Maximum	65			

Engineering Data


LED forward current vs. Ambient temperature




Continuous load current vs. On-state voltage




Trigger LED forward current vs. Ambient temperature




Turn ON, Turn OFF time vs. Ambient temperature




Output terminal capacitance vs. Load voltage




Continuous load current vs. Ambient temperature

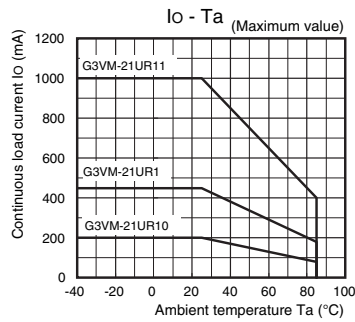


On-state resistance vs. Ambient temperature




Turn ON, Turn OFF time vs. LED forward current

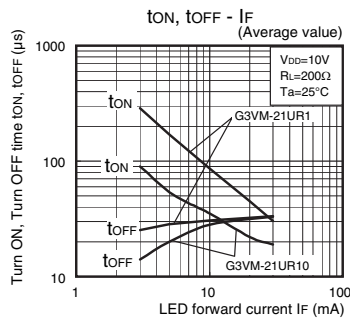


Turn ON, Turn OFF time vs. Ambient temperature




Current leakage vs. Load voltage




LED forward current vs. LED forward voltage




G3VM-21UR10

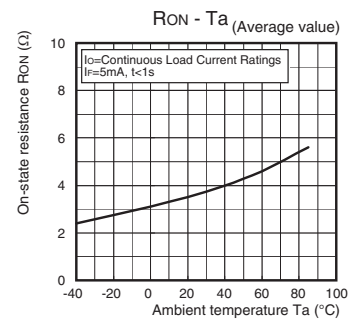

G3VM-21UR11

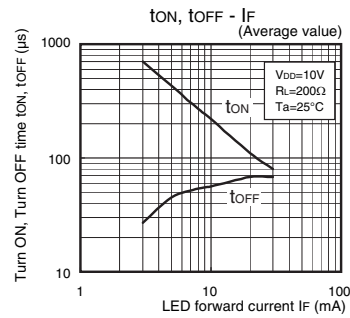


Current leakage vs. Ambient temperature

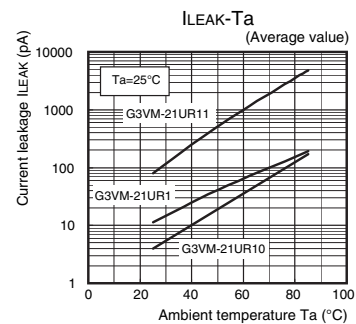

■Appearance / Terminal Arrangement / Internal Connections

■Appearance


VSON (Very Small Outline Non-leaded)
VSON4 pin



* Actual model name marking for each model

Model	Marking
G3VM-21UR10	2UA
G3VM-21UR1	2U1
G3VM-21UR11	2UB

■Terminal Arrangement/Internal Connections (Top View)





Note: The actual product is marked differently from the image shown here.

■Dimensions (Unit: mm)


Surface-mounting Terminals

Weight: 0.01g

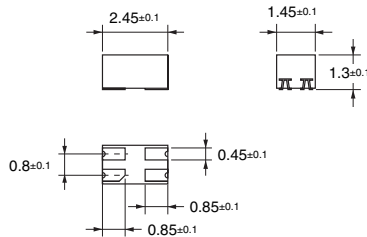

Actual Mounting Pad Dimensions

(Recommended Value, Top View)



Unless otherwise specified, the dimensional tolerance is ± 0.1 mm.

Note: The actual product is marked differently from the image shown here.

■Approved Standards

Applying for UL recognition

■Safety Precautions

- Refer to "Common Precautions" for all G3VM models.

• Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
• Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

OMRON Corporation

Electronic and Mechanical Components Company

Contact: www.omron.com/ecb

Cat. No. K267-E1-03
0215(0814)(O)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Solid State Relays - PCB Mount](#) category:

Click to view products by [Omron](#) manufacturer:

Other Similar products are found below :

[M86F-2W](#) [M90F-2Y](#) [G2-1A07-ST](#) [G2-1A07-TT](#) [G2-1B02-TT](#) [G2-DA06-ST](#) [923812OCAS](#) [PLA134S](#) [DS11-1005](#) [AQV212J](#)
[AQY412EHAJ](#) [EFR1200480A150](#) [901-7](#) [LCA220](#) [LCB110S](#) [1618400-5](#) [SR75-1ST](#) [AQH2213AJ](#) [AQV112KLJ](#) [AQV212AJ](#) [AQV212SXJ](#)
[AQV238AD01](#) [AQW414TS](#) [AQY221N2SYD01](#) [AQY221R2VJ](#) [AQY275AXJ](#) [AQY414SXE01](#) [G2-1A02-ST](#) [G2-1A03-ST](#) [G2-1A03-TT](#)
[G2-1A05-ST](#) [G2-1A06-TT](#) [G2-1A23-TT](#) [G2-1B01-ST](#) [G2-1B01-TT](#) [G2-1B02-ST](#) [G2-DA03-ST](#) [G2-DA03-TT](#) [G2-DA06-TT](#) [CPC1333GR](#)
[3-1617776-2](#) [CTA2425](#) [TLP3131\(F\)](#) [LBA110S](#) [LBB110S](#) [LCA110LSTR](#) [LCB126S](#) [WPPM-0626D](#) [WPPM-3526D](#) [WPPM-3588D](#)