

G3VM-□AY□/□DY□

MOS FET Relays Small DIP4 package with High dielectric strength type

D
I
P

Small DIP4 package with Dielectric Strength of 5,000 VAC between I/O

- Load voltage 40V/60V/200V/350V/400V/600V
- Standard type: Trigger LED forward current 3mA (max.)
- High sensitive type: Trigger LED forward current 2mA (max.)



RL

NEW

G
3
V
M
I
□
A
Y
□
/
D
Y
□

RoHS Compliant


⚠ Refer to "Common Precautions".

Note: The actual product is marked differently from the image shown here.

■ Application Examples

- Electrical power unit
- Security equipment
- Medical equipment
- Test & measurement equipment
- Industrial equipment

■ Package (Unit : mm, Average)

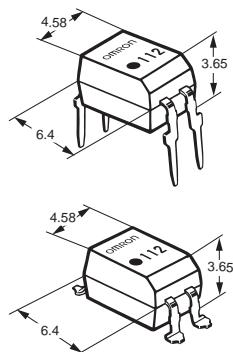

Note: The actual product is marked differently from the image shown here.

■ Model Number Legend

G3VM-□ □ □ □ □

1 2 3 4 5

1. Load Voltage

- 4: 40V
6: 60V
20: 200V
35: 350V
40: 400V
60: 600V

3. Package type

- A: DIP4 pin PCB terminals
D: DIP4 pin Surface-mounting Terminals

5. Other informations

When specifications overlap, serial code is added in the recorded order.

2. Contact form

- 1: 1a (SPST-NO)

4. Additional functions

- Y: Dielectric strength between I/O above 2,500V type

■ Ordering Information

● Standard type

Package type	Contact form	Load voltage (peak value) *	Continuous load current (peak value) *	Packing/Tube			Packing/Tape & reel	
				Model		Minimum package quantity	Model	Minimum package quantity
				PCB terminals	Surface-mounting Terminals			
DIP4	1a	40V	2000mA	G3VM-41AY1	G3VM-41DY1	100 pcs.	G3VM-41DY1(TR05)	500 pcs.
		60V	500mA	G3VM-61AY1	G3VM-61DY1		G3VM-61DY1(TR05)	
		200V	250mA	G3VM-201AY1	G3VM-201DY1		G3VM-201DY1(TR05)	
		350V	100mA	G3VM-351AY1	G3VM-351DY1		G3VM-351DY1(TR05)	
		400V	120mA	G3VM-401AY1	G3VM-401DY1		G3VM-401DY1(TR05)	
		600V	90mA	G3VM-601AY1	G3VM-601DY1		G3VM-601DY1(TR05)	

* The AC peak and DC value are given for the load voltage and continuous load current.

● High sensitive type

Package type	Contact form	Load voltage (peak value) *	Continuous load current (peak value) *	Packing/Tube			Packing/Tape & reel	
				Model		Minimum package quantity	Model	Minimum package quantity
				PCB terminals	Surface-mounting Terminals			
DIP4	1a	40V	2000mA	G3VM-41AY	G3VM-41DY	100 pcs.	G3VM-41DY(TR)	1,500 pcs.
		60V	500mA	G3VM-61AY	G3VM-61DY		G3VM-61DY(TR)	
		200V	250mA	G3VM-201AY	G3VM-201DY		G3VM-201DY(TR)	
		350V	100mA	G3VM-351AY	G3VM-351DY		G3VM-351DY(TR)	
		400V	120mA	G3VM-401AY	G3VM-401DY		G3VM-401DY(TR)	
		600V	90mA	G3VM-601AY	G3VM-601DY		G3VM-601DY(TR)	

* The AC peak and DC value are given for the load voltage and continuous load current.

■Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

- Standard type, High sensitive type

	Item	Symbol	G3VM-41AY1 G3VM-41DY1 G3VM-41AY G3VM-41DY	G3VM-61AY1 G3VM-61DY1 G3VM-61AY G3VM-61DY	G3VM-201AY1 G3VM-201DY1 G3VM-201AY G3VM-201DY	G3VM-351AY1 G3VM-351DY1 G3VM-351AY G3VM-351DY	G3VM-401AY1 G3VM-401DY1 G3VM-401AY G3VM-401DY	G3VM-601AY1 G3VM-601DY1 G3VM-601AY G3VM-601DY	Unit	Measurement conditions	
Input	LED forward current	I _F				30				mA	
	Repetitive peak LED forward current	I _{FP}				1				A	100 µs pulses, 100 pps
	LED forward current reduction rate	ΔI _F /°C				-0.3				mA/°C	T _a ≥25°C
	LED reverse voltage	V _R				5				V	
	Connection temperature	T _J				125				°C	
Output	Load voltage (AC peak/DC)	V _{OFF}	40	60	200	350	400	600		V	
	Continuous load current (AC peak/DC)	I _O	2,000	500	250	100	120	90		mA	
	ON current reduction rate	ΔI _O /°C	-20	-5	-2.5	-1	-1.2	-0.9		mA/°C	T _a ≥25°C
	Pulse ON current	I _{OP}	6	1.5	0.75	0.3	0.36	0.27		A	t=100ms, Duty=1/10
	Connection temperature	T _J				125				°C	
Dielectric strength between I/O (See note 1.)			V _{I-O}			5,000				V _{rms}	AC for 1 min
Ambient operating temperature			T _a			-40~+85				°C	
Ambient storage temperature			T _{STG}			-55~+125				°C	With no icing or condensation
Soldering temperature			-			260				°C	10s

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

DIP

G
3
V
M
I
□
A
Y
□
/
D
Y
□

■ Electrical Characteristics ($T_a = 25^\circ\text{C}$)

● Standard type

DIP


G3VM-□AY□/□DY□

Item		Symbol		G3VM-41AY1 G3VM-41DY1	G3VM-61AY1 G3VM-61DY1	G3VM-201AY1 G3VM-201DY1	G3VM-351AY1 G3VM-351DY1	G3VM-401AY1 G3VM-401DY1	G3VM-601AY1 G3VM-601DY1	Unit	Measurement conditions					
Input	LED forward voltage	VF	Minimum	1.1				V	I _F =10mA							
			Typical	1.27												
			Maximum	1.4												
Reverse current	I _R	Maximum	10				μA	$V_R=5V$								
Capacity between terminals	C _T	Typical	50					pF								
Trigger LED forward current	I _{FT}	Minimum	0.5	0.6		0.5		mA	G3VM-41AY1/DY1 : I _O =1A Others : I _O =Continuous load current ratings							
		Maximum	3													
Release LED forward current	I _{FC}	Minimum	0.1				mA	$I_{OFF}=10\mu A$								
Output	R _{ON}	Typical	0.09(0.06)	0.6	5	35(25)	22(17)	45(30)	Ω	I _F =5mA, I _O =Continuous load current ratings (value at t<1s)						
		Maximum	0.15(0.10)	2	8	50(35)	35(28)	60(40)								
Current leakage when the relay is open	I _{LEAK}	Maximum	1				μA	V_{OFF} =Load voltage ratings								
Capacity between terminals	C _{OFF}	Typical	300	130	90	30	80	75	pF							
Capacity between I/O terminals	C _{i-o}	Typical	0.8				pF	$f=1MHz, Vs=0V$								
Insulation resistance between I/O terminals	R _{i-o}	Minimum	1000					$M\Omega$								
Turn-ON time	t _{ON}	Typical	2.8	1		0.3	0.6	0.5	ms		G3VM-41AY1/DY1 : $R_L=200\Omega, I_F=10mA, V_{DD}=20V$					
		Maximum	5	3		2					G3VM-601AY1/DY1 : $R_L=200\Omega, I_F=5mA, V_{DD}=10V$					
Turn-OFF time	t _{OFF}	Typical	0.3	0.2	0.1		0.2				Others : $R_L=200\Omega, I_F=5mA, V_{DD}=20V$ (See note 2.)					
		Maximum	1													

● High sensitive type

Item		Symbol		G3VM-41AY G3VM-41DY	G3VM-61AY G3VM-61DY	G3VM-201AY G3VM-201DY	G3VM-351AY G3VM-351DY	G3VM-401AY G3VM-401DY	G3VM-601AY G3VM-601DY	Unit	Measurement conditions				
Input	LED forward voltage	VF	Minimum	1.45				V	I _F =10mA						
			Typical	1.63											
			Maximum	1.75											
Reverse current	I _R	Maximum	10				μA	$V_R=5V$							
Capacity between terminals	C _T	Typical	40					pF							
Trigger LED forward current	I _{FT}	Minimum	0.3				mA	G3VM-41AY/DY : I _O =1A Others : I _O =Continuous load current ratings							
		Maximum	2												
Release LED forward current	I _{FC}	Minimum	0.1				mA	$I_{OFF}=10\mu A$							
Output	R _{ON}	Typical	0.09(0.06)	0.6	5	35(25)	22(17)	45(30)		Ω	I _F =5mA, I _O =Continuous load current ratings (value at t<1s)				
		Maximum	0.15(0.10)	2	8	50(35)	35(28)	60(40)							
Current leakage when the relay is open	I _{LEAK}	Maximum	1				μA	V_{OFF} =Load voltage ratings							
Capacity between terminals	C _{OFF}	Typical	300	130	90	30	80	75		pF					
Capacity between I/O terminals	C _{i-o}	Typical	0.8				pF	$f=1MHz, Vs=0V$							
Insulation resistance between I/O terminals	R _{i-o}	Minimum	1000					$M\Omega$							
Turn-ON time	t _{ON}	Typical	2	0.5		0.1	0.2		ms	G3VM-601AY/DY : $R_L=200\Omega, I_F=5mA, V_{DD}=10V$					
		Maximum	5	1						Others : $R_L=200\Omega, I_F=5mA, V_{DD}=20V$ (See note 2.)					
Turn-OFF time	t _{OFF}	Typical	0.3	0.2											
		Maximum	1												

Note: 2. Turn-ON and Turn-OFF Times



G
3
V
M
I
□
A
Y
/□
D
Y

■Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.

- Standard type

Item	Symbol	G3VM-41AY1 G3VM-41DY1	G3VM-61AY1 G3VM-61DY1	G3VM-201AY1 G3VM-201DY1	G3VM-351AY1 G3VM-351DY1	G3VM-401AY1 G3VM-401DY1	G3VM-601AY1 G3VM-601DY1	Unit
Load voltage (AC peak/DC)	V _{DD}	Maximum	32	48	160	280	320	480
Operating LED forward current	I _F	Minimum			5			mA
		Typical			7.5			
		Maximum			25			
Continuous load current (AC peak/DC)	I _O	Maximum	2000	500	250	100	120	90
Ambient operating temperature	T _a	Minimum			-20			°C
		Maximum			65			

- High sensitive type

Item	Symbol	G3VM-41AY G3VM-41DY	G3VM-61AY G3VM-61DY	G3VM-201AY G3VM-201DY	G3VM-351AY G3VM-351DY	G3VM-401AY G3VM-401DY	G3VM-601AY G3VM-601DY	Unit
Load voltage (AC peak/DC)	V _{DD}	Maximum	32	48	160	280	320	480
Operating LED forward current	I _F	Minimum			3			mA
		Typical			5			
		Maximum		15		20		
Continuous load current (AC peak/DC)	I _O	Maximum	2000	500	250	100	120	90
Ambient operating temperature	T _a	Minimum			-20			°C
		Maximum			65			

■ Spacing and Insulation

- Standard type and High sensitive type


Item	Standard	Unit
Creepage distances	Minimum	7.0
Clearance distances	Minimum	7.0
	Internal isolation thickness	0.4
		mm

D
I
P

G
3
V
M
I
□
A
Y
□
/
D
Y


■Engineering Data

● LED forward current vs. Ambient temperature

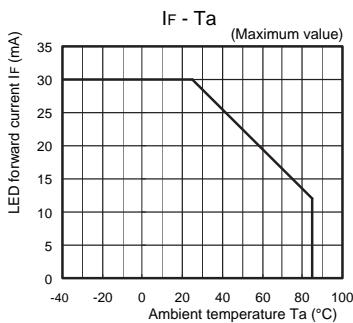


● Continuous load current vs. Ambient temperature

G3VM-41AY/DY/AY1/DY1

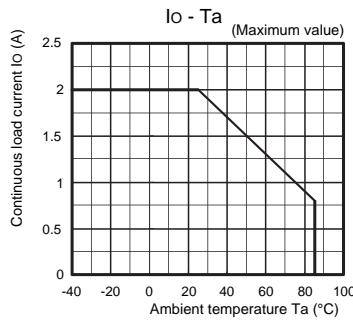


● Continuous load current vs. On-state voltage

G3VM-41AY/DY/AY1/DY1




● On-state resistance vs. Ambient temperature


G3VM-41AY/DY/AY1/DY1




● LED forward current vs. LED forward voltage




G3VM-61AY/DY/AY1/DY1
G3VM-201AY/DY/AY1/DY1




G3VM-61AY/DY/AY1/DY1
G3VM-201AY/DY/AY1/DY1




G3VM-61AY/DY/AY1/DY1
G3VM-201AY/DY/AY1/DY1




G3VM-351AY/DY/AY1/DY1
G3VM-401AY/DY/AY1/DY1
G3VM-601AY/DY/AY1/DY1

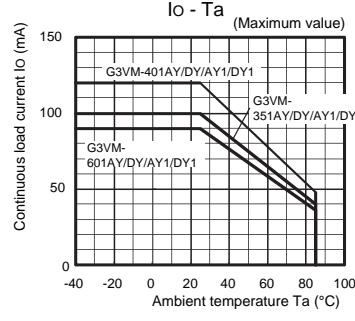

G3VM-351AY/DY/AY1/DY1
G3VM-401AY/DY/AY1/DY1
G3VM-601AY/DY/AY1/DY1



G3VM-351AY/DY/AY1/DY1
G3VM-401AY/DY/AY1/DY1
G3VM-601AY/DY/AY1/DY1

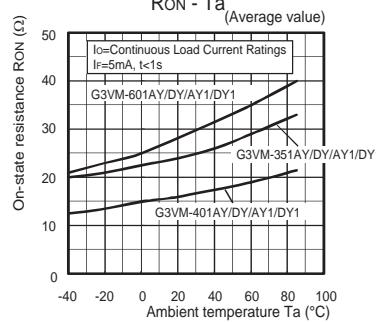


■Engineering Data

● Trigger LED forward current vs.

Ambient temperature


G3VM-41AY/DY/AY1/DY1

G3VM-61AY/DY/AY1/DY1




G3VM-201AY/DY/AY1/DY1

G3VM-351AY/DY/AY1/DY1



G3VM-401AY/DY/AY1/DY1

G3VM-601AY/DY/AY1/DY1




● Turn ON, Turn OFF time vs.

LED forward current


G3VM-41AY1/DY1

G3VM-61AY1/DY1

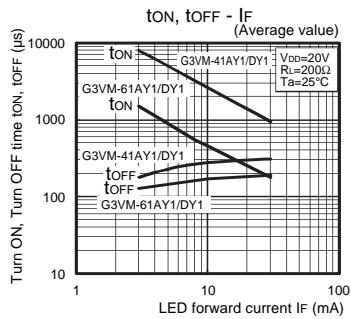


G3VM-201AY1/DY1

G3VM-351AY1/DY1




G3VM-401AY1/DY1

G3VM-601AY1/DY1




G3VM-41AY/DY

G3VM-61AY/DY

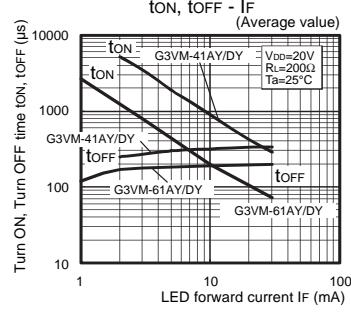


G3VM-201AY/DY

G3VM-351AY/DY



G3VM-401AY/DY

G3VM-601AY/DY




● Turn ON, Turn OFF time vs.

Ambient temperature


G3VM-41AY1/DY1

G3VM-61AY1/DY1

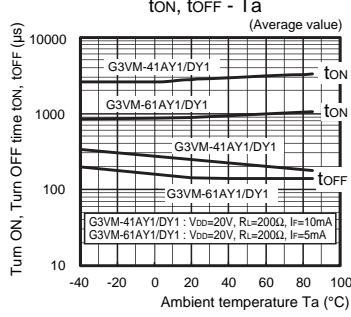


G3VM-201AY1/DY1

G3VM-351AY1/DY1



G3VM-401AY1/DY1

G3VM-601AY1/DY1



D
I
P

G
3
V
M
I
□
A
Y
□
/
□
D
Y


D
I
P

G
3
V
M
I
□
A
Y
/□
D
Y


■Engineering Data

● Turn ON, Turn OFF time vs. Ambient temperature


G3VM-41AY1/DY1
G3VM-61AY1/DY1



G3VM-201AY/DY
G3VM-351AY/DY




G3VM-401AY/DY
G3VM-601AY/DY

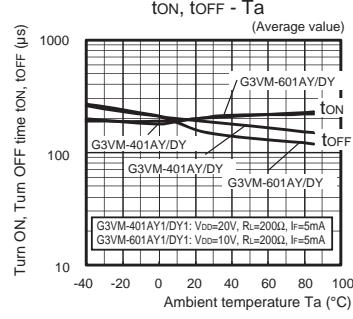


● Current leakage vs. Ambient temperature


G3VM-41AY/DY/AY1/DY1
G3VM-61AY/DY/AY1/DY1



G3VM-201AY/DY/AY1/DY1
G3VM-351AY/DY/AY1/DY1



G3VM-401AY/DY/AY1/DY1
G3VM-601AY/DY/AY1/DY1

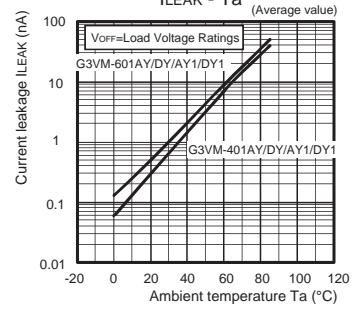


■Apperance/Terminal Arrangement/Internal Connections


■Apperance

DIP (Dual Inline Package)

DIP4

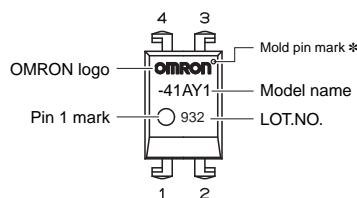

■Terminal Arrangement/Internal Connections



D
I
P

Note: The actual product is marked differently from the image shown here.


* The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.

■Dimensions (Unit: mm)




PCB Terminals

Weight: 0.25 g




Surface-mounting Terminals

Weight: 0.25 g

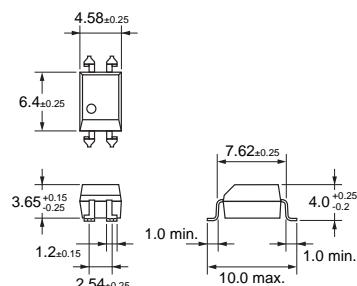


PCB Dimensions (BOTTOM VIEW)



Actual Mounting Pad Dimensions

(Recommended Value, TOP VIEW)



Note: The actual product is marked differently from the image shown here.

■Approved Standards

UL recognized

● Standard type and High sensitive type

Approved Standards	Contact form	File No.
UL recognized	1a (SPST-NO)	E80555

■Safety Precautions

- Refer to "Common Precautions" for all G3VM models.

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

OMRON Corporation

Electronic and Mechanical Components Company

Contact: www.omron.com/ecb

Cat. No. K275-E1-02
0215(0115)(O)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Solid State Relays - PCB Mount category:

Click to view products by Omron manufacturer:

Other Similar products are found below :

[M86F-2W](#) [M90F-2Y](#) [G2-1A07-ST](#) [G2-1A07-TT](#) [G2-1B02-TT](#) [G2-DA06-ST](#) [923812OCAS](#) [PLA134S](#) [DS11-1005](#) [AQV212J](#)
[AQY412EHAJ](#) [EFR1200480A150](#) [901-7](#) [LCA220](#) [LCB110S](#) [1618400-5](#) [SR75-1ST](#) [AQH2213AJ](#) [AQV112KLJ](#) [AQV212AJ](#) [AQV212SXJ](#)
[AQV238AD01](#) [AQW414TS](#) [AQY221N2SYD01](#) [AQY221R2VJ](#) [AQY275AXJ](#) [AQY414SXE01](#) [G2-1A02-ST](#) [G2-1A03-ST](#) [G2-1A03-TT](#)
[G2-1A05-ST](#) [G2-1A06-TT](#) [G2-1A23-TT](#) [G2-1B01-ST](#) [G2-1B01-TT](#) [G2-1B02-ST](#) [G2-DA03-ST](#) [G2-DA03-TT](#) [G2-DA06-TT](#) [CPC1333GR](#)
[3-1617776-2](#) [CTA2425](#) [TLP3131\(F\)](#) [LBA110S](#) [LBB110S](#) [LCA110LSTR](#) [LCB126S](#) [WPPM-0626D](#) [WPPM-3526D](#) [WPPM-3588D](#)