

G3VM-51PR

MOS FET Relays

Smallest Class in market, USOP Package MOS FET Relays is designed to exhibit a fast rise time and reduce signal degradation.

- ERT(Equivalent Rise Time): 40 ps (typ.), 90 ps (max)
- Dielectric strength of 500Vrms between I/O.

RoHS Compliant

Refer to "Common Precautions".

Application Examples

- Semiconductor test equipment
- Test & measurement equipment
- Communication equipment
- Data loggers

List of Models

Package type	Contact form	Terminals	Load voltage (peak value) (See note.)	Model	Minimum package quantity
					Number per tape & reel
USOP4	1a (SPST-NO)	Surface-mounting terminals	50V	G3VM-51PR	—
				G3VM-51PR (TR05)	500
				G3VM-51PR (TR)	1,500

Note 1. Ask you OMRON representative for orders under 1,500 pcs or 500 pcs.

2. Tape-cut USOPs are packaged without humidity resistance. Use manual soldering to mount them. Refer to common precautions.

3. The AC peak and DC value is given for the load voltages.

Absolute Maximum Ratings (Ta = 25°C)


Item	Symbol	Rating	Unit	Measurement conditions	
Input	LED forward current	IF	50	mA	
	LED forward current reduction rate	$\Delta I_F / ^\circ C$	-0.5	mA/°C	Ta ≥ 25°C
	LED reverse voltage	VR	5	V	
	Connection temperature	TJ	125	°C	
Output	Load voltage (AC peak/DC)	VOFF	50	V	
	Continuous load current (AC peak/DC)	Io	300	mA	
	ON current reduction rate	$\Delta I_O / ^\circ C$	-3.0	mA/°C	Ta ≥ 25°C
	Pulse ON current	Iop	900	mA	t = 100ms, Duty = 1/10
Connection temperature	TJ	125	°C		
Dielectric strength between I/O (See note 1.)	VI-O	500	Vrms	AC for 1 min	
Ambient operating temperature	Ta	-40 ~ +85	°C	With no icing or condensation	
Ambient storage temperature	Tstg	-40 ~ +125	°C	With no icing or condensation	
Soldering temperature	—	260	°C	10s	

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.


Electrical Characteristics (Ta = 25°C)

Item	Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions	
Input	LED forward voltage	VF	1.0	1.15	1.3	V	IF=10mA
	Reverse current	IR	—	—	10	μA	VR=5V
	Capacity between terminals	CT	—	15	—	pF	V=0, f=1MHz
Output	Trigger LED forward current	IFT	—	0.5	3	mA	Io=100mA
	Maximum resistance with output ON	RON	—	1	1.5	Ω	IF=5mA, Io=300mA, t<1s
	Current leakage when the relay is open	I _{LEAK}	—	—	1	nA	VOFF=50V
	Capacity between terminals	COFF	—	12	—	pF	V=0, f=100MHz, t<1s
	Capacity between I/O terminals	CI-O	—	0.4	—	pF	f=1MHz, Vs=0V
	Insulation resistance between I/O terminals	RI-O	1000	—	—	MΩ	VI-O=500VDC, RoH≤60%
	Turn-ON time	tON	—	0.2	0.5	ms	IF=5mA, RL=200Ω, VDD=20V (See note 2.)
Turn-OFF time	tOFF	—	0.1	0.4	ms		
Equivalent rise time	ERT	—	40	90	ps	IF=5mA, VDD=0.25V, Tr(in)=25ps (See Note.3)	

Note: 2. Turn-ON and Turn-OFF Times




Note: 3. ERT (Equivalent Rise Time)

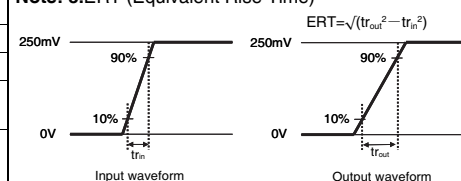

NEW

Note: The actual product is marked differently from the image shown here.

Terminal Arrangement/Internal Connections

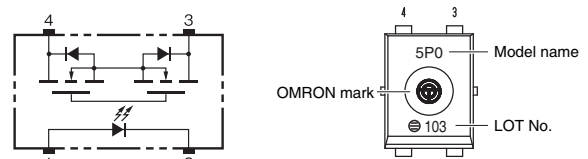

Note: The actual product is marked differently from the image shown here.


Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.


Item	Symbol	Minimum	Typical	Maximum	Unit
Load voltage (AC peak/DC)	V _{DD}	–	–	40	V
Operating LED forward current	I _F	5	7.5	20	mA
Continuous load current (AC peak/DC)	I _O	–	–	300	mA
Ambient operating temperature	T _a	–20	–	65	°C

Engineering Data


LED forward current vs. Ambient temperature
I_F - T_a

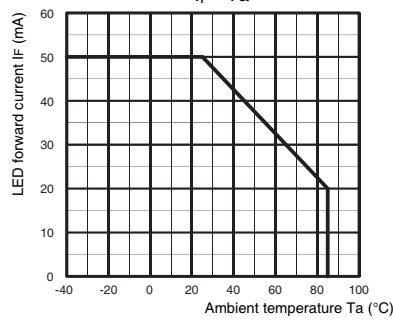


Continuous load current vs. Ambient temperature
I_O - T_a

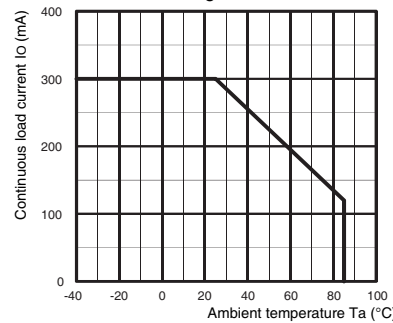


LED forward current vs. LED forward voltage
I_F - V_F

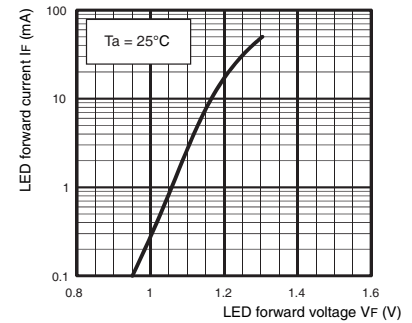


Continuous load current vs. On-state voltage
I_O - V_{ON}

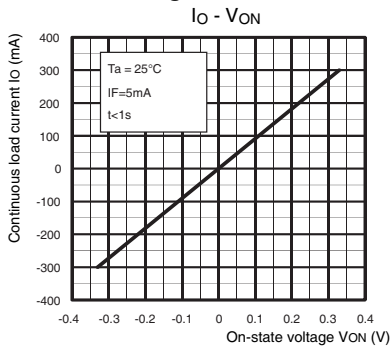


On-state resistance vs. Ambient temperature
R_{ON} - T_a

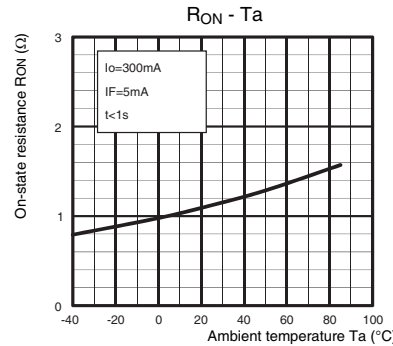


Trigger LED forward current vs. Ambient temperature
I_{FT} - T_a

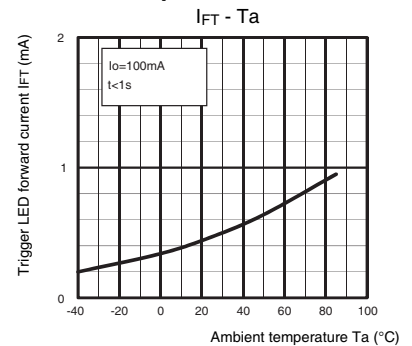


Turn ON, Turn OFF time vs. LED forward current
t_{ON}, t_{OFF} - I_F

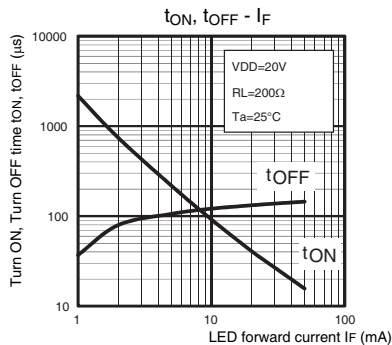


Turn ON, Turn OFF time vs. Ambient temperature
t_{ON}, t_{OFF} - T_a

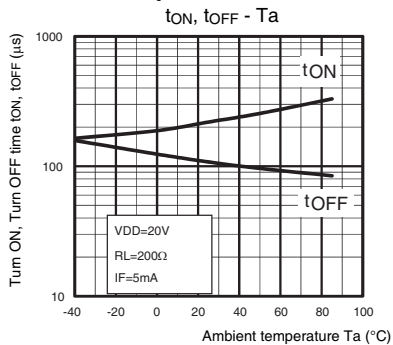

Current leakage vs. Load voltage
I_{LEAK} - V_{OFF}

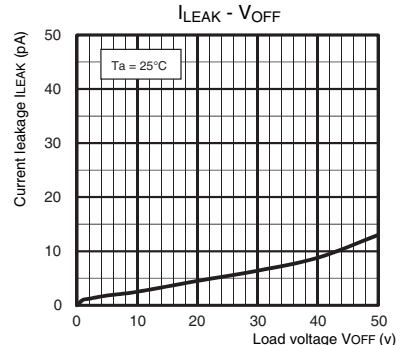

Output terminal capacitance COFF/COFF(ov) vs. Load voltage
C_{OFF} - V_{OFF}

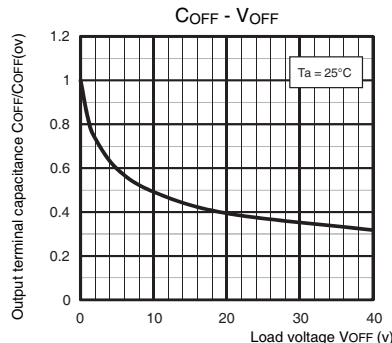


Safety Precautions

- Refer to "Common Precautions" for all G3VM models.

■ Appearance

USOP (Ultra Small Outline Package)
USOP4



Note: The actual product is marked differently from the image shown here.




■ Dimensions

(Unit: mm)




Surface-mounting Terminals

Weight: 0.03g



Actual Mounting Pad Dimensions

(Recommended Value, Top View)



Note: The actual product is marked differently from the image shown here.

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Solid State Relays - PCB Mount](#) category:

Click to view products by [Omron](#) manufacturer:

Other Similar products are found below :

[M86F-2W](#) [M90F-2Y](#) [G2-1A07-ST](#) [G2-1A07-TT](#) [G2-1B02-TT](#) [G2-DA06-ST](#) [923812OCAS](#) [PLA134S](#) [DS11-1005](#) [AQV212J](#)
[AQY412EHAJ](#) [EFR1200480A150](#) [901-7](#) [LCA220](#) [LCB110S](#) [1618400-5](#) [SR75-1ST](#) [AQH2213AJ](#) [AQV112KLJ](#) [AQV212AJ](#) [AQV212SXJ](#)
[AQV238AD01](#) [AQW414TS](#) [AQY221N2SYD01](#) [AQY221R2VJ](#) [AQY275AXJ](#) [AQY414SXE01](#) [G2-1A02-ST](#) [G2-1A03-ST](#) [G2-1A03-TT](#)
[G2-1A05-ST](#) [G2-1A06-TT](#) [G2-1A23-TT](#) [G2-1B01-ST](#) [G2-1B01-TT](#) [G2-1B02-ST](#) [G2-DA03-ST](#) [G2-DA03-TT](#) [G2-DA06-TT](#) [CPC1333GR](#)
[3-1617776-2](#) [CTA2425](#) [TLP3131\(F\)](#) [LBA110S](#) [LBB110S](#) [LCA110LSTR](#) [LCB126S](#) [WPPM-0626D](#) [WPPM-3526D](#) [WPPM-3588D](#)