

# G6DN

PCB Power Relay

## SPST Slim Power Relay for 5 A switching

- Slim 5-mm width and miniature size. (20 × 5.08 × 12.5 mm)
- High switching capability 5 A (250 VAC and 30 VDC), and high contact reliability by crossbar-twin contact.
- Low power consumption 110 mW.
- Meets application standards EN61010-1 and EN61010-2-201 for reinforced insulation (CTI 600 V min. and Rated insulation voltage 300 V).
- Actualize electrical durability 100 Kops (-L type)



### Model Number Legend

G6DN-□□□□-□  
           1  2  3  4

**1. Number of Poles**  
 1: 1-pole

**2. Contact Form**  
 A: SPST-NO (1a)

**3. Enclosure Rating**  
 None: Fully sealed

**4. Classification**  
 None: Standard (E-LIFE 80 Kops)  
 L: High durability type (E-LIFE 100 Kops)  
 SL: General purpose

### Application Examples

- Programmable Controller output
- Temperature Controller
- Building Automation
- Output of control system

### Ordering Information

Classification	Contact form	Enclosure rating	Terminal shapes	Model	Minimum packing unit
Standard	SPST-NO (1a)	Fully sealed	PCB terminal	G6DN-1A	25 pcs/ tube
High durability				G6DN-1A-L	
General purpose				G6DN-1A-SL	100pcs/tray

Note. When ordering, add the rated coil voltage to the model number.

Example: G6DN-1A DC5  
                                 └─── Rated coil voltage

However, the notation of the coil voltage on the product case as well as on the packaging will be marked as □□ VDC.  
 Example: G6DN-1A 5VDC

### Ratings

#### Coil

Classification	Rated voltage	Rated current (mA)	Coil resistance (Ω)	Must operate voltage (V)	Must release voltage (V)	Max. voltage (V)	Power consumption (mW)
				% of rated voltage			
Standard	4.5 VDC	24.4	184	70% max. *	5% min.	160%	Approx. 110
	5 VDC	22.0	227				
	12 VDC	9.2	1,309				
	24 VDC	4.6	5,236				
High durability	5 VDC	36.0	139				
	12 VDC	15.0	800				
	24 VDC	7.5	3,200				
General purpose	5 VDC	22.0	227				
	12 VDC	9.2	1,309				
	24 VDC	4.6	5,236				

Note. The rated current and resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.

\* Operating voltage is less than 72% when the relay is sideways and the marking is right way.

#### Contacts

	Resistive load	Inductive load (cos φ = 0.4, L/R = 7 ms)
Contact Type	Cross bar twin	
Contact material	Ag-Alloy and Au plating *	
Rated load	5 A at 250 VAC 5 A at 30 VDC	2 A at 250 VAC 2 A at 30 VDC
Rated carry current	5 A	
Max. switching voltage	277 VAC, 125 VDC	
Max. switching current	5 A	

\* Au plating is applied to stationary contact.

## ■ Characteristics

		Standard	High durability	General purpose
Contact resistance		100 mΩ max.		
Operate time		10 ms max.		
Release time		5 ms max.		
Insulation resistance		1,000 MΩ min. (at 500 VDC)		
Dielectric strength	Between coil and contacts	3,000 VAC, 50/60 Hz for 1 min		
	Between contacts of the same polarity	750 VAC, 50/60 Hz for 1 min		
Surge withstand voltage	Between coil and contacts	6 kV (1.2 × 50 μs)		
Vibration resistance	Destruction	10 to 55 to 10 Hz, 2.5 mm single amplitude (5.0 mm double amplitude)		
	Malfunction	10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude)		
Shock resistance	Destruction	1,000 m/s <sup>2</sup>		
	Malfunction	100 m/s <sup>2</sup>		
Durability	Mechanical	20,000,000 operations min. (at 18,000 operations/hr)		
	Electrical	100,000 operations min. (3 A at 250 VAC, 3 A at 30 VDC Resistive load) 80,000 operations min. (5 A at 250 VAC, 5 A at 30 VDC Resistive load) 100,000 operations min. (2 A at 250 VAC, 2 A at 30 VDC Inductive load)	100,000 operations min. (5 A at 250 VAC, Resistive load) 100,000 operations min. (5 A at 30 VDC, Resistive load) 200,000 operations min. (2 A at 250 VAC, Inductive load) 200,000 operations min. (2 A at 30 VDC, Inductive load)	50,000 operations min. (5 A at 250 VAC, Resistive load) 50,000 operations min. (5 A at 30 VDC, Resistive load) 100,000 operations min. (2 A at 250 VAC, Inductive load) 100,000 operations min. (2 A at 30 VDC, Inductive load)
Failure rate (P level) (reference value) *		0.1 mA at 0.1 VDC		
Ambient temperature	Operating	-40°C to +90°C (with no icing or condensation)		
Humidity		5% RH to 85% RH		
Weight		Approx. 3 g		

Note 1. Values in the above table are initial values.

Note 2. The contact resistance is measured with 1 A applied at 5 VDC using a fall-of-potential method.


Note 3. The insulation resistance is measured between coil and contacts and between contacts of the same polarity at 500 VDC.

\* This value was measured at a switching frequency of 120 operations/min.

## Engineering Data


### Maximum Switching Capacity

#### G6DN-1A, G6DN-1A-L

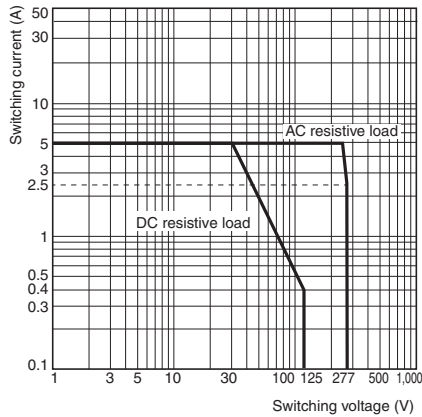


### Durability

#### G6DN-1A

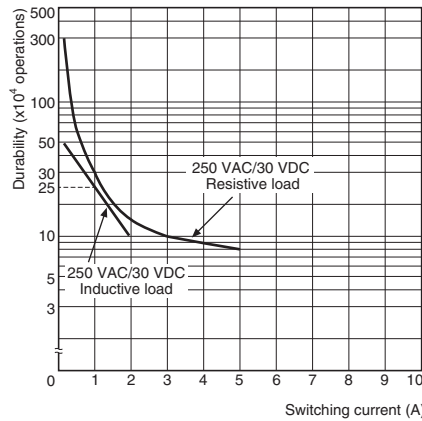

### Ambient Temperature vs. Maximum Coil Voltage


#### G6DN-1A, G6DN-1A-L

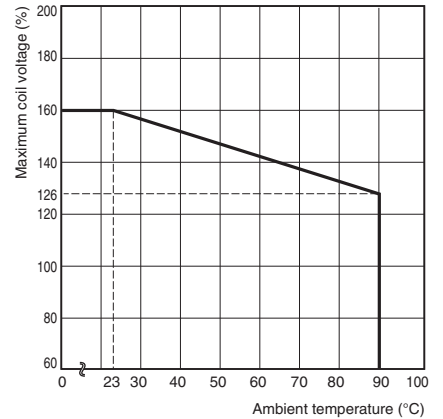


Note. The maximum coil voltage refers to the maximum voltage in a varying range of operating power voltage, not a continuous voltage.

### Ambient Temperature vs. Must Operate and Must Release Voltages

#### G6DN-1A, G6DN-1A-L

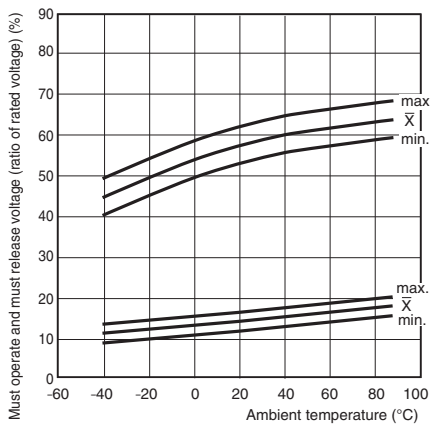


### Shock Malfunction

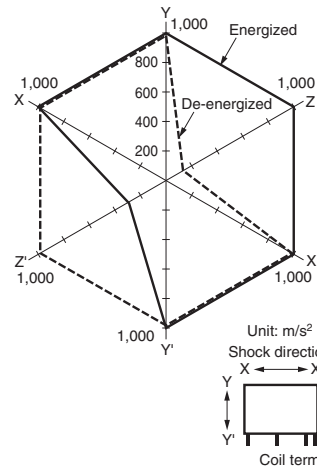

Sample: G6DN-1A  
Number of Relays: 5 pcs  
Test conditions: Impose a shock in the  $\pm X$ ,  $\pm Y$ , and  $\pm Z$  directions three times each with the Relay energized to check the shock values that cause the Relay to malfunction.  
Standard: 100  $\text{m/s}^2$


## Dimensions

### G6DN-1A(-L)

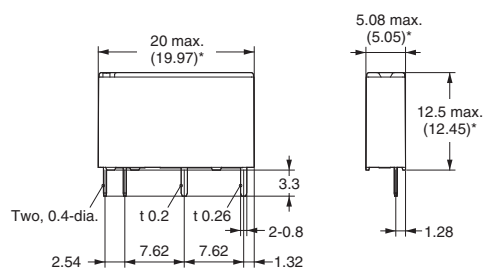


\* Average value


### PCB Mounting Holes (Bottom View)

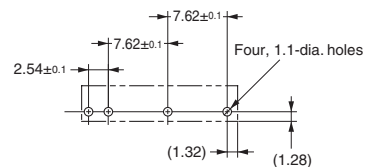


### Terminal Arrangement/ Internal Connections (Bottom View)




### G6DN-1A-SL

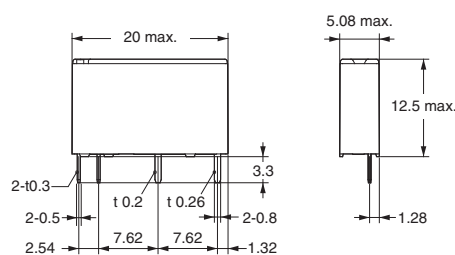

### PCB Mounting Holes (Bottom View)

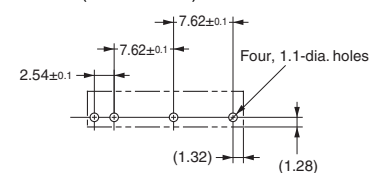

### Terminal Arrangement/ Internal Connections (Bottom View)




## Approved Standards

●The rated values approved by each of the safety standards may be different from the performance characteristics individually defined in this datasheet.

**UL/C-UL-approved models**  (File No. E41515)

Model	Contact form	Coil ratings	Contact ratings	Operations
G6DN-1A(-SL)	SPST-NO	4.5 to 24 VDC	5 A at 277 VAC (Resistive) 95°C	6,000
			5 A at 30 VDC (Resistive) 90°C	6,000
			3A, 250V ac, Resistive 85°C	100,000
			1/10 hp 125 VAC 95°C	1,000
			1/10 hp 277 VAC 95°C	1,000
			D300 120 VAC/240 VAC 95°C	6,000
			C300 120 VAC/240 VAC 95°C	6,000
			R300 125 VDC/250 VDC 95°C	6,000
G6DN-1A-L	SPST-NO	5 to 24 VDC	5 A 250 VAC (Resistive) 95°C	100,000
			2 A 250 VAC (General Use) 95°C	100,000
			2 A 30 VDC (General Use) 95°C	100,000
			1/10 hp 120 VAC 40°C	6,000
			C300 120 VAC/240 VAC 95°C	6,000
			D150 120 VAC 95°C	6,000
			R150 125 VDC 95°C	6,000

Note. CSA certification CSA 22.2 No.14 can be recognized by C-UL.

**VDE (EN61810-1)**  (Certificate No. 40042696)

Model	Contact form	Coil ratings	Contact ratings	Operations
G6DN-1A	SPST-NO	4.5, 5, 12, 24 VDC	5 A at 250 VAC (cosφ= 1.0) 90°C	10,000
			5 A at 30 VDC (L/R = 0 ms) 90°C	10,000
G6DN-1A-L	SPST-NO	5, 12, 24 VDC	5 A 250 VAC (cosφ= 1.0) 90°C	100,000
			2 A 250 VAC (cosφ= 0.4) 90°C	100,000
			2 A 250 VAC (cosφ= 0.6) 90°C	100,000
			5 A 30 VDC (L/R = 0 ms) 90°C	100,000
			2 A 30 VDC (L/R = 7 ms) 90°C	100,000

**TÜV (EN61810-1)**  (Registration No. R 50396359)

Model	Contact form	Coil ratings	Contact ratings	Operations
G6DN-1A-SL	SPST-NO	5, 12, 24 VDC	5 A at 250 VAC (cosφ= 1.0) 90°C	10,000
			5 A at 30 VDC (L/R = 0 ms) 90°C	10,000

Clearance distance	3.5 mm min.
Creepage distance	3.6 mm min.
Type of insulation coil-contact circuit	Basic (PD.2)
open contact circuit	Micro disconnection
Rated Insulation voltage	300 V
Pollution degree	2
Rated voltage system	250 V
Over voltage category	II
Category of protection according to IEC 61810-1	RT III (Sealed)
Insulation material group	I
Tracking resistance according to IEC 60112	CTI 600 V min.
Flammability class according to UL94	V-0
Coil insulation system according to UL	Class B

## Precautions

●Please refer to “PCB Relays Common Precautions” for correct use.

Please check each region's Terms & Conditions by region website.

---

## OMRON Corporation

Electronic and Mechanical Components Company

### Regional Contact

**Americas**

<https://www.components.omron.com/>

**Asia-Pacific**

<https://ecb.omron.com.sg/>

**Korea**

<https://www.omron-ecb.co.kr/>

**Europe**

<http://components.omron.eu/>

**China**

<https://www.ecb.omron.com.cn/>

**Japan**

<https://www.omron.co.jp/ecb/>

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [General Purpose Relays](#) category:*

*Click to view products by [Omron](#) manufacturer:*

Other Similar products are found below :

[APF30318](#) [JVN1AF-4.5V-F](#) [PCN-105D3MHZ](#) [5JO-10000S-SIL](#) [5JO-1000CD-SIL](#) [5JO-400CD-SIL](#) [LY2S-AC220/240](#) [LYQ20DC12](#)  
[6031007G](#) [6131406HQ](#) [6-1393099-3](#) [6-1393099-8](#) [6-1393122-4](#) [6-1393123-2](#) [6-1393767-1](#) [6-1393843-7](#) [6-1415012-1](#) [6-1419102-2](#) [6-](#)  
[1423698-4](#) [6-1608051-6](#) [6-1608067-0](#) [6-1616170-6](#) [6-1616248-2](#) [6-1616282-3](#) [6-1616348-2](#) [6-1616350-1](#) [6-1616350-8](#) [6-1616358-7](#) [6-](#)  
[1616359-9](#) [6-1616360-9](#) [6-1616931-6](#) [6-1617039-1](#) [6-1617052-1](#) [6-1617090-2](#) [6-1617090-5](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617801-8](#) [6-](#)  
[1617802-2](#) [6-1618107-9](#) [6-1618248-4](#) [M83536/1-027M](#) [CX-4014](#) [MAHC-5494](#) [MAVCD-5419-6](#) [703XCX-120A](#) [7-1393100-5](#) [7-1393111-7](#)  
[7-1393144-5](#) [7-1393767-8](#)