

G6K-2F-RF-V

Surface-mounting High-frequency Relay

8-GHz Band Miniature DPDT High Frequency Relay for High-speed Differential Transmission Signal Switching

- High-frequency characteristics (insertion loss 3 dB or less at 8 GHz)
- Miniaturized to 11.7 × 7.9 × 7.1 mm (L × W × H).
- Rated power consumption of 100 mW with high sensitivity

RoHS Compliant

Model Number Legend

G6K-2F-RF-V
1 2 3 4

1. Number of poles/
Contact Form

2: 2-pole/ DPDT (2c)

2. Terminal Shape

F: Outside-L surface mounting terminals

3. Special Function 1

RF: High-frequency compatible

4. Special Function 2

V: 8-GHz band High-speed differential transmission compatible type

Note. We have a lineup of G6K (U)-2F(P)-RF(-S,-T) products for 1-GHz/3-GHz band high-frequency signal applications.

Ordering Information

Relay Function	Enclosure rating	Contact form	Model	Rated coil voltage	Minimum packing unit
Single-side stable	Fully sealed	DPDT (2c)	G6K-2F-RF-V	3, 4.5, 5, 12 VDC	40 pcs/tube

Note 1. When ordering, add the rated coil voltage to the model number.

Example: G6K-2F-RF-V DC5

DC5 Rated coil voltage

However, the notation of the coil voltage on the product case as well as on the packing will be marked as □□ VDC.

Ratings

Contacts

Item	Load	Resistive load
Rated load	125 VAC, 0.3 A 30 VDC, 1 A 10 VDC, 10 mA 8 GHz, 1 W *	
Rated carry current	1 A	
Max. switching voltage	125 VAC or 60 VDC	
Max. switching current	1A	

* This value is for a V.SWR of 1.2 max. at the load.

High-frequency Characteristics *1


Item	Frequency	8GHz	
Differential transmission characteristics	Insertion loss	3 dB max.	
	Isolation	15 dB min.	
	Return loss (V.SWR)	5 dB min. (3.57 max.)	
Single-ended characteristics (reference value)	Insertion loss	4 dB max.	
		Isolation	15 dB min.
	Return loss (V.SWR)	Between contacts of the same polarity	15 dB min.
		Between contacts of different polarity	15 dB min.
Maximum carry power		1 W *2	
Maximum switching power		1 W *2	

Note 1. The impedance of the measurement system is 50 Ω. (Differential impedance is 100 Ω.)

Note 2. The above values are initial values.

*1. Contact your OMRON representative if the Relay will be used in an application that requires high repeatability in high-frequency characteristics.

*2. These values are for a V.SWR of 1.2 max. at the load.



NEW

Application Examples

- Semiconductor test equipment
- Test&measurement equipment
- Communication equipment

Standard type specifications

Contact type: Bifurcated crossbar
Ag (Surface Au alloy)

G6K-2F-RF-V

●Coil: Single

Rated voltage	Item	Rated current (mA)	Coil resistance (Ω)	Must operate voltage (V)	Must release voltage (V)	Maximum voltage (V)	Power consumption (mW)
				% of rated voltage			
3 VDC		33.0	91	80% max.	10% min.	150%	Approx. 100
4.5 VDC		23.2	194				
5 VDC		21.1	237				
12 VDC		9.1	1,315				

Note 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.

Note 2. The operating characteristics are measured at a coil temperature of 23°C.

Note 3. The maximum voltage is the highest voltage that can be imposed on the Relay coil instantaneously.

■Characteristics

Contact resistance *1		100 mΩ max.
Operating time *2		3 ms max. (approx. 1.4 ms)
Release time *2		3 ms max. (approx. 0.7 ms)
Insulation resistance *3		500 MΩ min. (at 500 VDC)
Dielectric strength	Between coil and contacts	350 VAC, 50/60 Hz for 1 min
	Between contacts of different polarity	350 VAC, 50/60 Hz for 1 min
	Between contacts of the same polarity	350 VAC, 50/60 Hz for 1 min
	Between ground and coil/contacts	350 VAC, 50/60 Hz for 1 min
Vibration resistance	Destruction	10 to 55 to 10 Hz, 2.5 mm single amplitude (5 mm double amplitude)
	Malfunction	10 to 55 to 10 Hz, 1.65 mm single amplitude (3.3 mm double amplitude)
Shock resistance	Destruction	1,000 m/s ²
	Malfunction	750 m/s ²
Durability	Mechanical	50,000,000 operations min. (at a switching frequency of 36,000 operations/hour)
	Electrical	1,000,000 operations min. (10 VDC, 10 mA, at a switching frequency of 1,800 operations/hour) 100,000 operations min. (Other rated load, at a switching frequency of 1,800 operations/hour)
Ambient operating temperature		-40°C to 70°C (with no icing or condensation)
Ambient operating humidity		5% to 85%
Weight		Approx. 1.16 g

Note. The above values are initial values.

*1. The contact resistance was measured with 10 mA at 1 VDC with a voltage drop method.


*2. Values in parentheses are actual values.

*3. The insulation resistance was measured with a 500 VDC megohmmeter applied to the same parts as those used for checking the dielectric strength.


Engineering Data

High-frequency characteristics (differential transmission characteristics)


Insertion loss

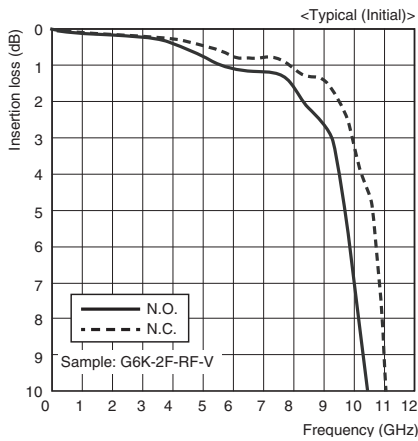

Isolation

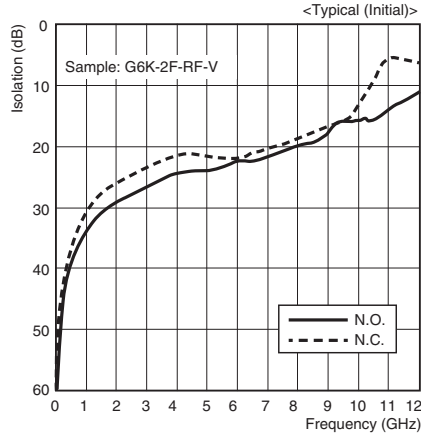


Return loss, V.SWR

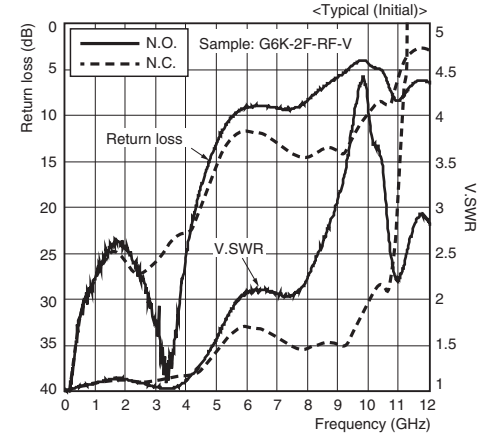


High-frequency characteristics (single-ended characteristics)


Insertion loss

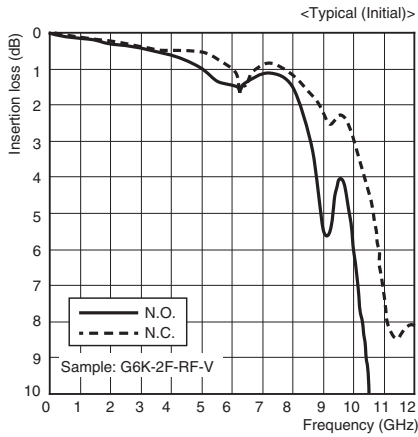

Isolation

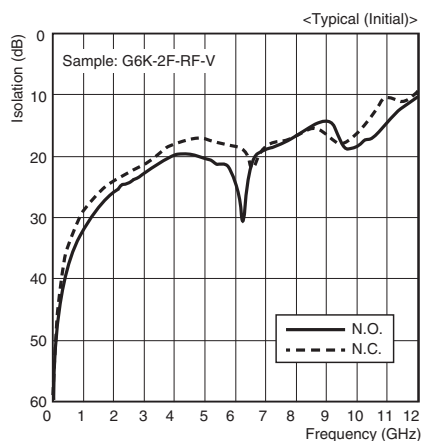

Return loss, V.SWR

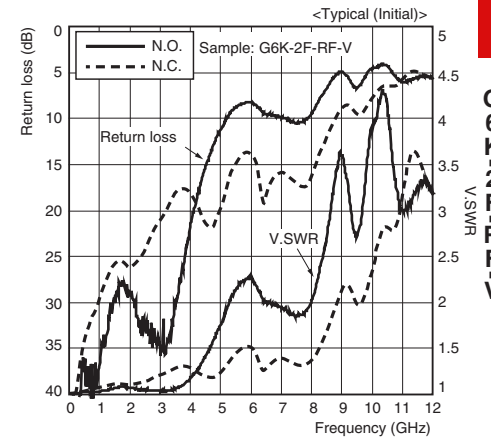

Note 1. The high-frequency characteristics depend on the mounting board. Be sure to check operation including durability in actual equipment before use.

Note 2. Ambient temperature condition: 23°C.


Note 3. The impedance of the measurement system is 50 Ω. (Differential impedance is 100 Ω.)

Note 4. S parameter (Touchstone format) data used for circuit simulation is available. Please inquire.

●High-frequency characteristics (Signal Integrity, differential transmission)

at 8.1 Gbps


N.O. Contact

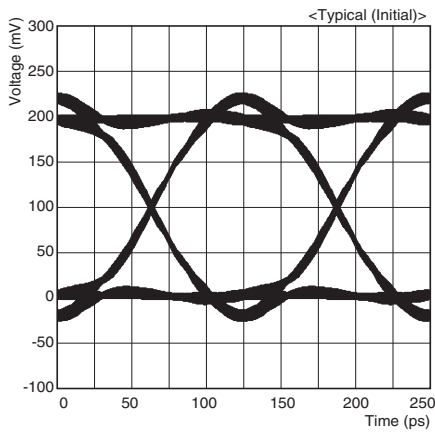

Eye Height	Eye Width	Jitter P-P
173 mV	121.0 ps	2.5 ps

at 10 Gbps


N.O. Contact

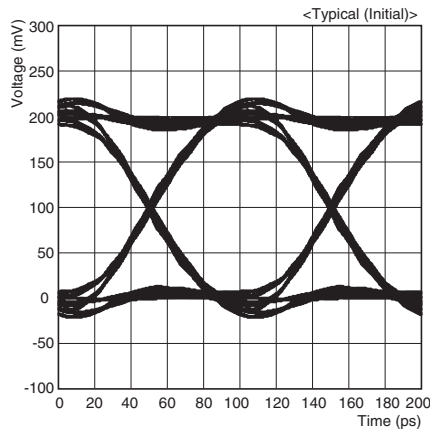

Eye Height	Eye Width	Jitter P-P
177 mV	96.5 ps	3.5 ps


at 12.5 Gbps

N.O. Contact

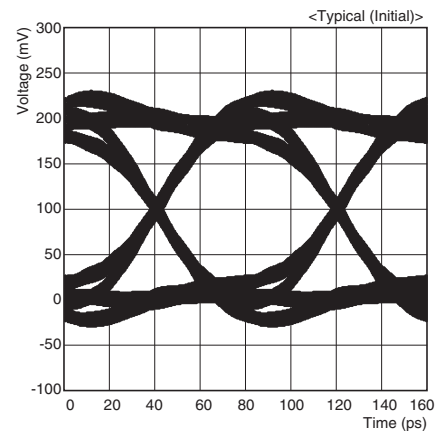


Eye Height	Eye Width	Jitter P-P
147 mV	75.2 ps	4.8 ps

N.C. Contact

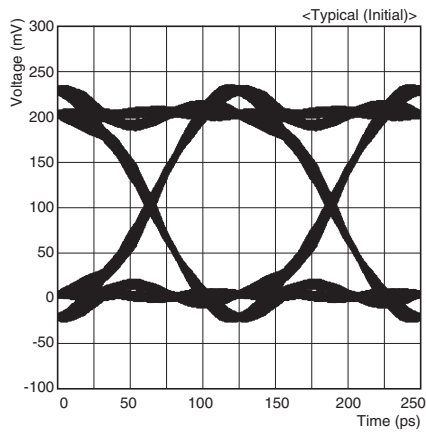


Eye Height	Eye Width	Jitter P-P
166 mV	116.0 ps	7.4 ps

N.C. Contact

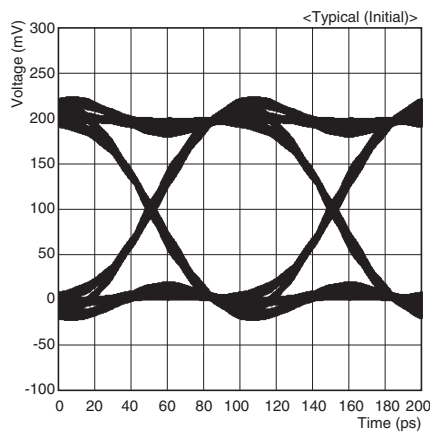

Eye Height	Eye Width	Jitter P-P
172 mV	94.5 ps	5.5 ps

N.C. Contact

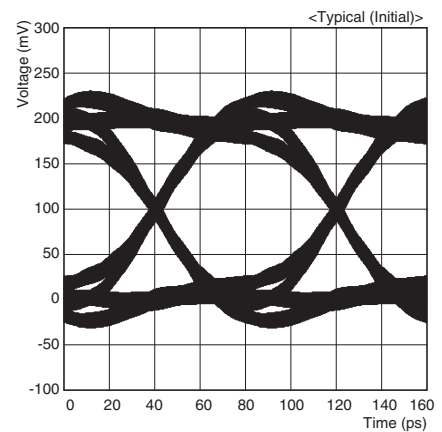

Eye Height	Eye Width	Jitter P-P
137 mV	74.4 ps	5.6 ps

Conditions

- 2¹¹-1 PRBS signal
- Input differential voltage 200 mV
- Rise time 25 ps @ 10 - 90%

Note 1. Ambient temperature condition: 23°C.

Note 2. The impedance of the measurement system is 50 Ω. (Differential impedance is 100 Ω.)

Note 3. This data includes loss due to the test board.

●Propagation delay time


Item	Propagation delay time (ps)	(typical value)
N.O. Contact	107.5	
N.C. Contact	115.0	

Note 1. Ambient temperature condition: 23°C.

Note 2. The impedance of the measurement system is 50 Ω. (Differential impedance is 100 Ω.)

Conditions

Rise time 25 ps @ 10 - 90%

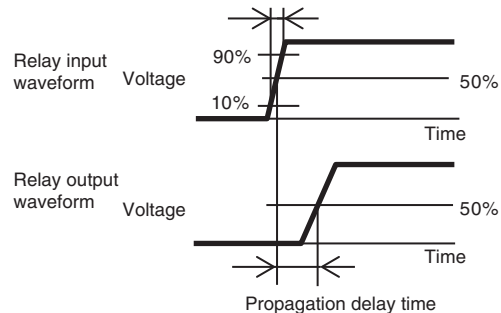


G6K-2F-RF-V

Surface-mounting High-frequency Relay


■Dimensions

(Unit: mm)


G6K-2F-RF-V

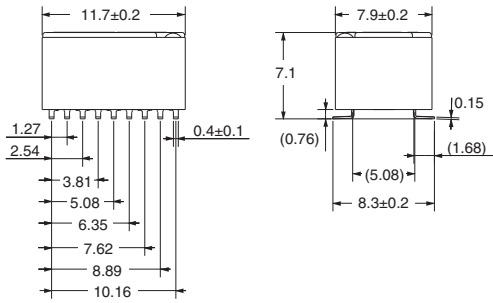

Mounting Dimensions (Top View) Tolerance: ±0.1 mm



Terminal Arrangement/ Internal Connections TOP VIEW



Note. Check carefully the coil polarity of the Relay.

Note 1. Each value has a tolerance of ±0.3 mm.


Note 2. The coplanarity of the terminals is 0.15 mm max.

Note 3. The dimensions of the printed circuit board work drawing are a recommended example that take soldering into consideration. Frequency characteristics vary depending on the band dimensions, so check the effect on high-frequency characteristics using a test board before use.

■Package specifications

Tube Packing

G6K-2F-RF-V in tube packing are arranged so that the orientation mark of each Relay is on the left side. Be sure not to make mistakes in Relay orientation when mounting the Relay to the PCB.

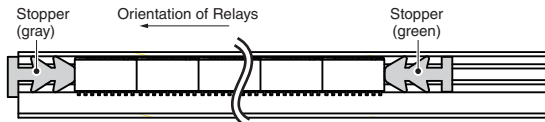


Tube length: 520 mm (stopper not included)
No. of Relays per tube: 40 pcs

G6K-2F-RF-V

■G6K-2F-RF-V Recommended Soldering Method


●Recommended Conditions for IRS Method (Surface-mounting Terminals)

(1) IRS Method (Mounting Solder: Lead)

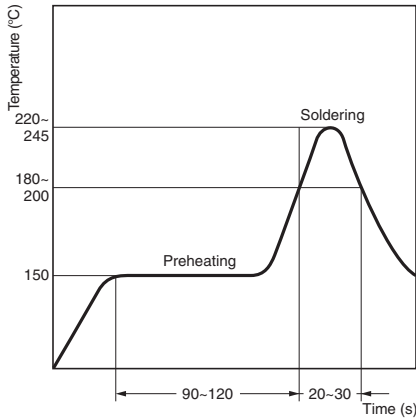


(The temperature profile indicates the temperature on the circuit board surface.)

- The thickness of cream solder to be applied should be between 200 and 250 μm and the land pattern should be based on OMRON's recommended PCB pattern.
- To maintain the correct soldering joint shown in the following diagram, we recommend applying solder with the soldering conditions shown on the left.

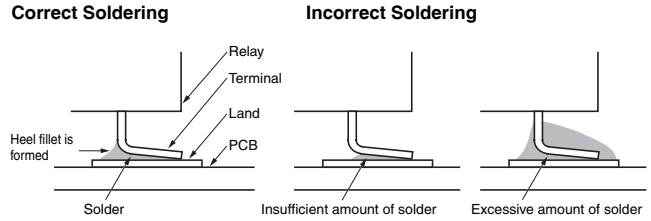

Check the soldering in the actual mounting conditions before use.

(2) IRS Method (Mounting Solder: Lead-free)

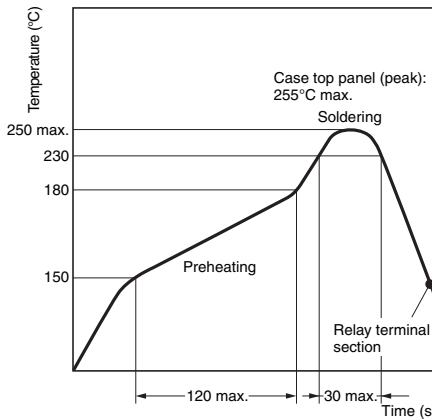

(The temperature profile indicates the temperature on the PCB.)

■ Safety Precautions

- For general precautions on PCB Relays, refer to the precautions provided in General Information of the Relay Product Data Book.

Correct Use

● Relay Handling

- Use the Relay as soon as possible after opening the moistureproof package. (As a guideline, use the Relay within one week at 30°C or less and 60% RH or less.) If the Relay is left for a long time after opening the moisture-proof package, the appearance may suffer and seal failure may occur after the solder mounting process. To store the Relay after opening the moisture-proof package, place it into the original package and seal the package with adhesive tape.
- When washing the product after soldering the Relay to a PCB, use a water-based solvent or alcohol-based solvent and keep the solvent temperature to less than 40°C. Do not put the Relay in a cold cleaning bath immediately after soldering.

● Environmental Conditions for Usage, Storage, and Transport


- Avoid direct sunlight when using, storing, or transporting the Relay and maintain normal temperature, humidity, and pressure conditions.

● Long-term, Continuous ON Contacts

- Using the Relay in a circuit where the Relay will be ON continuously for long periods (rather than switching) can lead to unstable contacts because the heat generated by the coil itself will affect the insulation and can cause a film to develop on the contact surfaces. We recommend using a latching relay (magnetic-holding relay) in this kind of circuit. If a single-side stable model must be used in this kind of circuit, we recommend adding fail-safe circuits in case the contact fails or the coil burns out.

● Claw Securing Force During Automatic Mounting

- During automatic insertion of Relays, be sure to set the securing force of each claw to the following so that the Relay's characteristics will be maintained.



Direction A: 1.96 N max.
 Direction B: 4.90 N max.
 Direction C: 1.96 N max.

● Coating

- Do not use silicone coating to coat the Relay when it is mounted to the PCB. Do not wash the PCB after the Relay is mounted using detergent containing silicone. Otherwise, the detergent may remain on the surface of the Relay.

● Repeatability

- Contact your OMRON representative if the Relay will be used in an application that requires high repeatability in high-frequency characteristics and contact resistance.

• Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
 • Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [High Frequency / RF Relays](#) category:

Click to view products by [Omron](#) manufacturer:

Other Similar products are found below :

[134M4-26](#) [134YZM4-12](#) [136CM9-5](#) [ER136CZM9-5B](#) [ER412DYM-12B](#) [ARA200A4HM01](#) [3SBH1020A2](#) [400-192-10](#) [412TM-18](#)
[ARN12A12](#) [422DM-26](#) [411T-12](#) [LB363-100-5](#) [D3210](#) [ARN10A12](#) [ER116C-26A](#) [ER114ZM4-5A/SQ](#) [ER114ZM4-12A/SQ](#) [ER412-26B/Q](#)
[ER134DYZ-12A](#) [36 AT5](#) [25-200ZA](#) [36 T5](#) [48-000ZA](#) [27 T5](#) [24-200ZA](#) [27 T5](#) [26-200ZA](#) [27 T5](#) [28-200ZA](#) [ER411DM4-12A/SQ](#)
[732-5/Q](#) [R591362640](#) [R591723400](#) [R595867120](#) [HF3 02](#) [R594873417](#) [R595863115](#) [IM43TS](#) [IMB03CTS](#) [IM05CGR](#) [IM02CGR](#) [IM21TS](#)
[732TN-26](#) [1-1462038-1](#) [IMB06CTS](#) [1462041-3](#) [1462051-5](#) [1462050-1](#) [1462050-2](#) [G6K-2F-RF-S-DC5](#) [ARE10A4H](#) [ARE1024](#) [ARS1012](#)
[ARJ22A12](#)