

- SPST and SPDT Contacts
- Plug in and Weatherproof type
- Fully automated Assembly
- L x W x H = 28 x 28 x 25.5 mm nominal
- ISO footprint and terminals 6.3 x 0.82 mm
- Made In Canada

## Available Types

Type	Description
G8JN-1C7T-R-DC12	Mini ISO SPDT PI with resistor
G8JN-1C7T-D-DC12	Mini ISO SPDT PI with diode
G8JN-1A7T-R-DC12	Mini ISO SPST PI with resistor
G8JN-1C7T-DC12	Mini ISO SPDT PI
G8JN-1C7T-MF-DC12	Mini ISO SPDT PI with Molded Bracket Cover
G8JN-1C7T-MF-R-DC12	Mini ISO SPDT PI with resistor and Molded Bracket Cover
G8JN-1C6T-F-R-DC12	Mini ISO SPDT W/P with resistor, and Metal Bracket
G8JN-1C6T-DC12	Mini ISO SPDT W/P
G8JN-1C6T-F-DC12	Mini ISO SPDT W/P, with Metal Bracket
G8JN-1C6T-R-DC12	Mini ISO SPDT W/P with resistor
* Other special types also available	
PI = Plug-in; W/P = Weatherproof;	

## Contact Data

Typical Switching Current	In rush 150 A, Steady 35 A
Max Switching Voltage	16 V
Min. Carry / Switching Current	1 A
Contact Material	Silver Tin oxide (Cadmium free)

## Coil Ratings (at 20°C)

Type	Rated Voltage	Coil Resistance ±10%	Coil Resistance w/ 680Ω suppression ±10%	Nominal Coil Power Consumption	Pull in Voltage	Dropout Voltage
G8JN Type	12 VDC	76 Ω	68 Ω	1.89 W	< 8.0 V	> 1.0 V

## Typical Applications

Motor Load
Engine Cooling Fan
Lamp Load
Resistive Load

## Characteristics

Max. Initial Contact Voltage Drop		50 mV @ 10 A / 5 mΩ
NO Activation Time		10 ms max. (5.4 ms typical) @ 14 V
NO Deactivation Time		10 ms max. (1.6 ms typical) @ 14 V
Insulation resistance		20 MΩ min
Dielectric strength		0.5 mA max. leakage at 900 VDC for 1s
Ambient Operating Temperature		- 40 °C to +125 °C
Humidity		95% RH @ 45 C
Service life	Mechanical	1,000,000 operations min.
	Electrical	100,000 operations min.
Weight		34 g


\* Typical data includes coil resistor suppression. Deactivation time may decrease without coil suppression.

## Characteristic Reference Data



### Durability Data

Relay	Load Type	Current	Cycles Tested
G8JN	NO Motor Load	80 A Inrush 33 A Steady State	300,000 3s on, 4s off
	NO Lamp Load	150 A Inrush 30 A Steady State	300,000 3s on, 4s off
	NC Motor Load	40 A Inrush 20 A Steady State	300,000 3s on, 4s off
	NO Resistive Load	35 A Steady State	100,000 2s on, 2s off
	NO/NC Resistive Load	30 / 20 A Steady State	100,000 1s on, 1s off





# Dimensions








## Plugin type



DATE CODE TO APPEAR IN THIS LOCATION



## Plugin type Molded Bracket

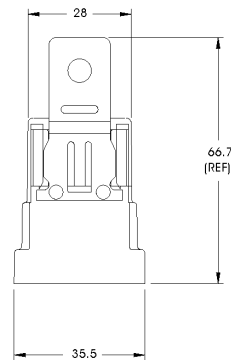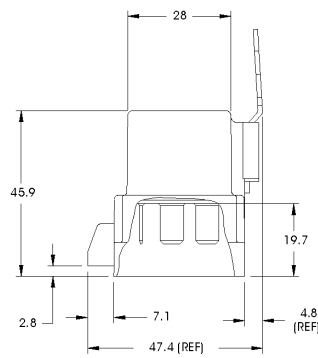

## Weatherproof type Metal Bracket

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Automotive Relays](#) category:*

*Click to view products by [Omron](#) manufacturer:*

Other Similar products are found below :

[7-1414968-8](#) [7-1617345-6](#) [9-1617516-5](#) [G5CE1ASIDC12](#) [1393204-2](#) [1393302-3](#) [13Z99A115-0074](#) [1432872-1](#) [AR4-15F11-S01](#) [AR4-15H11](#)  
[1617057-2](#) [1617058-6](#) [1617518-5](#) [2-1617057-2](#) [2-1617057-6](#) [2-1617058-3](#) [CB1F-M-12V-H15](#) [898H-1AH-D-001-12VDC](#) [AR4-11F11](#)  
[AR4-15F11](#) [AR4-41F11](#) [24198-1](#) [4-1617057-0](#) [41FZ-200ACG-BSL](#) [5-1616920-2](#) [5-1617052-9](#) [5407-0011-HS](#) [CB1AF-M-12V-H59](#) [5-](#)  
[1617346-8](#) [103-1AH-C-12VDC](#) [V23134A1052X299](#) [6-1393302-1](#) [897H-1AH-D-R1-U01-12VDC](#) [FTR-P3CP024W1-06](#) [1-1617057-8](#) [3-](#)  
[1393305-1](#) [5436-0001-HS](#) [V23086-R1851-A502](#) [V23136-A0004-X075](#) [898H-1AH-D1SW-R1-12VDC](#) [RH4C1P2607](#) [RE031005](#)  
[V23134M0052G242](#) [23234B0001X001-EV-144](#) [2-1904020-1](#) [V23134B0052C642](#) [V23134B0053C642](#) [V23234-A1001-X036](#) [2138602-1](#) [3-](#)  
[1904020-8](#)