


Medium/High-Current Connectors Conform to International Standards.

- DIN 41612 compliance ensures full interchangeability.
- Sufficient creepage distance for medium/high-current and high-voltage circuit applications.
- Mounts in XC5-series Racks.
- The product line also includes M-type (Mixed) DIN Connectors.
- The XC4 conforms to UL standards (No. E103202). (Some models are not included)

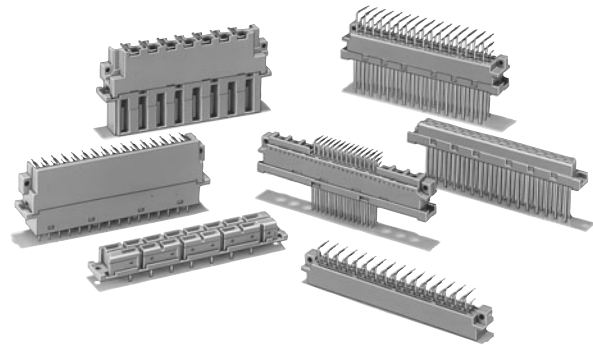

RoHS Compliant

Connectors

Model	XC4A/B	XC4E/F	XC4G/H	XC4K/L	XC4M/N
DIN connector type	F type	E type	D type	H type	M type
Appearance					
Page	2 to 3	4 to 5	6 to 7	8 to 9	11 to 12

Ratings and Characteristics

Item	Model	XC4A/B	XC4E/F	XC4G/H	XC4K/L	XC4M/N	Remarks
Rated current		6 A			15 A	2 A	
Rated voltage		380 VAC	500 VAC			300 VAC	
Contact resistance		15 mΩ max.			8 mΩ max.	20 mΩ max.	At 20 mV, 100 mA max.
Insulation resistance		10 ⁶ MΩ min.					At 100 VDC
Dielectric strength		1,550 VAC			3,100 VAC	1,000 VAC	1 min (leakage current: 1 mA max.)
Total insertion force		74 N	1.23 N per contact	39 N	88 N	0.93 N per contact	Max. value
Removal force		0.20 N	0.15 N	0.20 N		0.15 N	Min. value with a test gauge
Insertion durability		400 times					
Ambient operating temperature		Operating: -55 to 125°C					With no icing

Materials and Finish

Item		XC4A/B	XC4E/F	XC4G/H	XC4K/L	XC4M/N (See note 2.)
Housings	Plugs	Fiber-glass reinforced PC resin (UL94V-1)/gray	Fiber-glass reinforced PBT resin (UL94V-0)/gray		PC resin with glass (UL94V-1)/gray (See note 1.)	Fiber-glass reinforced PBT resin (UL94V-0)/gray
	Sockets					
Contacts	Mating end	Plugs	Brass/nickel base, gold plating		Brass/nickel base, silver plating	Brass/nickel base, gold plating
		Sockets	Phosphor bronze inlay/nickel base, gold plating		Phosphor bronze/nickel base, silver plating	Phosphor bronze/nickel base, gold plating
	Terminal	Plugs	Brass/nickel base, tin plating		Brass/nickel base, silver plating	Brass/nickel base, tin plating
		Sockets	Phosphor bronze/nickel base, tin plating		Phosphor bronze/nickel base, tin plating	Phosphor bronze/nickel base, tin plating

- Note:**
1. The XC4L-1541 is made of fiber-glass reinforced PBT resin (UL94V-0).
 2. Connector materials and finishes.

Applicable Wrap Post Wire Sizes

AWG26, AWG24, AWG22, or AWG20
(Solid wire: 0.40 to 0.80 mm dia.)

Wrap Post Length




3 wires

XC4G DIN D-type Plugs


■ Dimensions

(unit: mm)

XC4G-3212
(With right-angle terminals)

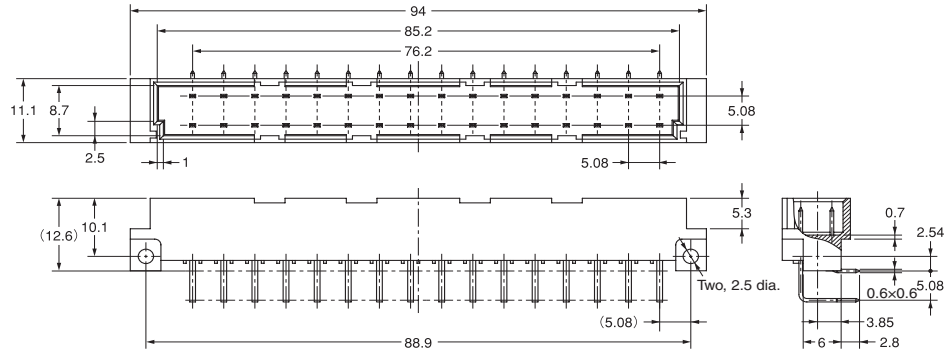

Mounting holes (bottom view)

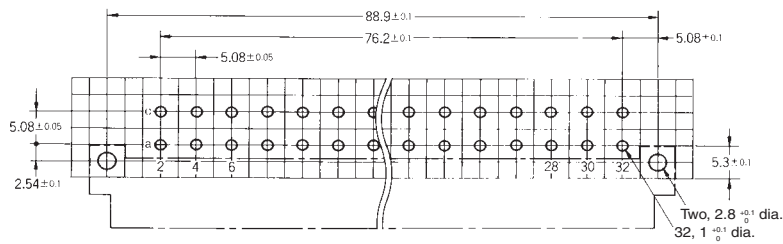

■ Ordering Information

Appearance		
No. of contacts	Terminal type	Model
32	Right-angle terminals	XC4G-3212

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DIN 41612 Connectors](#) category:

Click to view products by [Omron](#) manufacturer:

Other Similar products are found below :

[004.767](#) [608489050008049](#) [691327-1](#) [74670-0732](#) [74680-0340](#) [75880-0015](#) [76453-0014](#) [86093159ALF](#) [9732967801](#) [QLC260R](#)
[120X10019X](#) [120X10089X](#) [122A10249X](#) [122A11089X](#) [122A13089X](#) [122A10089X](#) [122A10129X](#) [122A10349X](#) [122A13359X](#) [1377391-4](#)
[DIN-048CPC-SR1-MH](#) [1393583-2](#) [1393726-7](#) [140X10129X](#) [143-1913-000](#) [143-1908-000](#) [1484472-1](#) [2110070-1](#) [2110070-2](#) [CBC20T00-](#)
[008FDS5-0-1-002VR](#) [172699-5036](#) [2-1393557-4](#) [2-1437084-2](#) [394506](#) [419-2080-402](#) [V42254B2202C968](#) [419-2086-201](#) [419-2087-002](#)
[448657-1](#) [448847-3](#) [5-1393755-9](#) [02990000004](#) [054302](#) [043556](#) [09062483201750](#) [0850033067](#) [09031646555](#) [09061486901840](#)
[09185107324800](#) [102A10019X](#)