
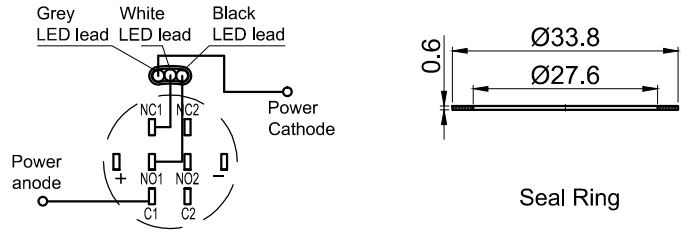


FOR 客户名称	APPROVED 客户确认签字	ATTN 销售负责人

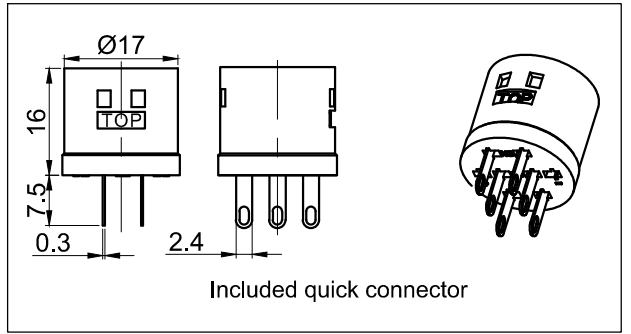

ring ( red ) → ring ( Green )

Contact Composition

Operation Position	Switch Type	90° Two Position	
		1NO1NC	2NO2NC
⊗	⊗	NO ♂ NC ♀	NO ♂ NC ♀ Left ♂ Right ♀
⊙	⊙	NO ♂ NC ♀	NO ♂ NC ♀ Left ♂ Right ♀

**SPECIFICATIONS:**

- 1.Switch Rating: AC220V/0.5A, DC110V/0.1A.
- 2.Mechanical Life: ≥200,000cycles.
- 3.Electrical Life: ≥50,000cycles.
- 4.Contact Resistance: ≤50mΩ.
- 5.Insulation Resistance: ≥1,000MΩ.
- 6.Dielectric Strength: 1,500V, RMS 50Hz, 1min.
- 7.Operating Temperature: -25°C~ +55°C(No Freezing).
- 8.Torque: About 0.8Nm max.applied to nut.
- 9.IP Class: IP40,IP65(Maintain can made to order).
- 10.Terminal Type: Pin Terminal(2.4 x 0.3mm).

**MATERIALS:**

- 1.Contact: Silver alloy.
- 2.Head: Stainless Steel.
- 3.Body: Stainless Steel.
- 4.Base: PBT、PA.

Part Number:LAS1-AGQ30-□Y/2●/RG/▲

"□"	Contact structure	"●"	Operation type	"▲"	Lamp Voltage
11	1NO 1NC	1	Maintain $\swarrow$ $\searrow$	6V	DC 6V
22	2NO 2NC	3	Return $\swarrow$ $\searrow$	12V	DC 12V
				24V	DC 24V
				110V	DC 110V
				220V	DC 220V
Other voltage can be made to order					

BRAND 品牌 <b>ONPOW</b>	红波按钮制造有限公司 ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.						
	USED 用途	APPD 审核	CH 2020/04/30				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.	FINISH 处理	CHKD 校对	NCH 2020/04/30				
	SCALE 比例	0.9 / 1	UNIT 单位	mm	DR. 制图	ZPD 2020/04/30	
DIMENSIONS	TOLERANCE	TITLE 名称	GQ Series Anti-vandal push button				
0.00 TO 18.00mm	±0.43mm	DWG NO. 图号	LAS1-AGQ30-Y二位置		SIZE 图纸	A4	
18.01 TO 30.00mm	±0.52mm	FILE NAME 档案名称	LAS1-AGQ30.DWG	SHEET 张	1 / 1	REV. 更改	1
30.01 TO 50.00mm	±0.62mm						
50.01 TO 80.00mm	±0.74mm						

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Onpow](#) manufacturer:*

Other Similar products are found below :

[PS165P10Y01W12V](#) [PS165P10Y21B24V](#) [PS193P10Y31G24VT](#) [PS223P10Y21O12VD](#) [HBJD-40/DZ/2/RG/230AC/B](#) [V16F-11Z-24B](#)  
[V16Y-11Z-24O](#) [V19-21D-12Y-S](#) [V16Y-11-24G](#) [V16F-11Z-24R](#) [HBJD-40/DZ/1/Y/24AC/DC/B](#) [LAS1-AJ-22X/31/G/24V](#) [GQ12-AH-](#)  
[10E/J/G/24V/S](#) [LAS1GQ22-11E/G/24V/S](#) [LAS1GQF-11ZET/L/W/12V/S](#) [GQ25-11D/R/12V/S](#) [GQ30-11Z/A](#) [HBJD-](#)  
[40/DWA/1/Y/24AC/DC/B](#) [PS165P10Y21O12V](#) [PS193P10Y01W12VL](#) [PS193P10Y31W24VT](#) [V16F-11-B](#) [V16Y-11-230O](#) [V16F-11Z-230B](#)  
[V12F-11Z-24Y](#) [PS165P10Y01](#) [V10F-11Z-Y](#) [V16-10D-12G-S](#) [LAS1J-11X/2/R/12V](#) [LAS1J-11X/2/R/24V](#) [LAS1Y-11X/2/JC/R](#) [LAS1-AF-](#)  
[11X/21/R/12V](#) [LAS1-AF-11X/21/R/24V](#) [LAS1-AJ-11X/21/N](#) [LAS1-AJ-11X/21/R](#) [LAS1-AY-11X/21/G/12V](#) [LAS1-AY-11X/21/R/12V](#)  
[LAS1F-11X/2/R](#) [LAS1J-11X/2/G/12V](#) [LAS1GQ22-11ZE/R/12V/S](#) [LAS1GQ25-11E/B/24V/S](#) [LAS1GQ25-11E/Y/24V/S](#) [LAS1GQ30-](#)  
[11E/G/24V/S](#) [LCA25-11E/W/12V/S](#) [MTA22F-10E/Y/W/12V/S](#) [LAS1-AGQ-11ET/G/24V/S](#) [GQ28-11ZD/B/24V/S](#) [AD16-16M/230V](#)  
[PS193P10Y01Y12VT](#) [PS223P10Y31](#)