


PANEL CUTOUT
MAX.PANEL THICKNESS
6 mm

Seal Ring

Contact Composition

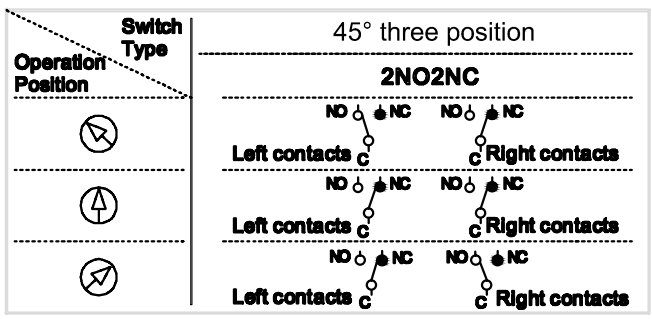

Part Number: LAS1-AY-□X/◇◆/△/▲/◎

| | |
|----|--|
| □ | Contact structure |
| 22 | 2NO 2NC |
| ◇ | Operation position |
| 3 | Three Position $\begin{matrix} L \\ C \\ R \end{matrix}$ |
| ◆ | Operation type |
| 1 | Maintain $\begin{matrix} L \\ C \\ R \end{matrix}$ |
| 3 | Return $\begin{matrix} L \\ C \\ R \end{matrix}$ |

| | |
|---|------------|
| △ | Lamp Color |
| R | Red |
| G | Green |
| Y | Yellow |

| | |
|------------------------------------|--------------|
| ▲ | Lamp Voltage |
| 6V | AC/DC 6V |
| 12V | AC/DC 12V |
| 24V | AC/DC 24V |
| 110V | AC/DC 110V |
| 220V | AC/DC 220V |
| Other voltage can be made to order | |

| | |
|-----------|----------|
| ◎ | IP class |
| No Letter | IP40 |
| P | IP65 |

SPECIFICATIONS:

- 1.Switch Rating: AC220V/0.5A, DC110V/0.1A.
- 2.Mechanical Life: ≥200,000cycles.
- 3.Electrical Life: ≥50,000cycles.
- 4.Contact Resistance: ≤50mΩ.
- 5.Insulation Resistance: ≥100MΩ.
- 6.Dielectric Strength:
Between contact and lamp terminals: AC 2,000V, RMS 50Hz, 1min;
Between terminals of the same pole: AC 1,500V, RMS 50Hz, 1min;
Between terminals of different pole: AC 2,000V, RMS 50Hz, 1min.
- 7.Operating Temperature: -25℃~ +55℃(No Freezing).
- 8.IP Class: IP40,IP65(Maintain can made to order).
- 9.Terminal Type: Pin Terminal(2.8 x 0.5mm).

MATERIALS:

- 1.Contact: Silver alloy.
- 2.Head: PC.
- 3.Body: PC.
- 4.Base: PBT.

| | | | |
|---|--|--|--------------------------|
| BRAND 品牌 ONPOW | | 红波按钮制造有限公司 ONPOW PUSH BUTTON MANUFACTURE CO.,LTD. | |
| THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD. | | USED 用途 | APPD 审核 CH 2020/04/26 |
| FINISH 处理 | | SCALE 比例 1.4 : 1 | UNIT 单位 mm |
| TITLE 名称 LAS1-A Series selector switch | | DR. 制图 ZPD 2020/04/26 | |
| DWG NO. 图号 LAS1-AY-X三位置带灯 | | SHEET 张 1 / 1 | |
| FILE NAME 档案名称 LAS1-A-X.DWG | | REV. 更改 1 | |
| DIMENSIONS | | TOLERANCE | |
| 0.00 TO 18.00mm | | ±0.43mm | |
| 18.01 TO 30.00mm | | ±0.52mm | |
| 30.01 TO 50.00mm | | ±0.62mm | |
| 50.01 TO 80.00mm | | ±0.74mm | |
| SIZE 图纸 A4 | | | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Rotary Switches](#) category:

Click to view products by [Onpow](#) manufacturer:

Other Similar products are found below :

[71ESF30-05204N](#) [MC06L1NCGF](#) [84986-26](#) [PLR3251](#) [PLR3262](#) [A0142M2SP](#) [A019605](#) [A029303](#) [R2AA2133NNNN](#) [R2AA4455NNNN](#)
[RMS1224](#) [14-520.0360](#) [BCK1006](#) [HW1MS-0202-101](#) [A029101](#) [ACSNO-129-YB-C1014](#) [ACSNO-134-RR-YB-C1005](#) [ACSNO-353-SB-](#)
[C3016](#) [1825537-4](#) [T505](#) [T505E](#) [H10207RR01Q](#) [M3786/39-4ZC](#) [M3786/4-0630](#) [M3786/4-3044](#) [M3786/4-5256](#) [MC6CX1A502X009](#)
[44MBS60-04-2-03N](#) [44MG90-02-1-02N](#) [50KMT90-01-2-02N](#) [55DP30-01-2-AJN](#) [55P30-01-1-12S-C](#) [DKPT65105291](#) [5-1825033-1](#)
[08MY231140](#) [101402A](#) [7813S-1-051E](#) [801775-2B](#) [55P30-01A12S](#) [55P36-01-1-10N-C](#) [55P36-01A10N](#) [55SP30-01-1-07N](#) [M3786/4-5034](#)
[M3786/4-1150L](#) [M3786/4-1256L](#) [T10012E](#) [447610-1](#) [55D36-01-2-AJN](#) [55DP36-01-1-AJN](#) [M3786/4-5891](#)