


| | | |
|-------------|--------------------|---------------|
| FOR 客户名称 | APPROVED 客户确认签字 | ATTN 销售负责人 |
| | | |

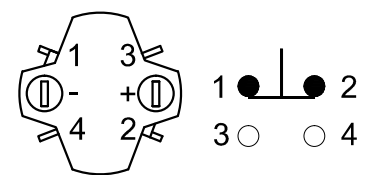

Contact Composition
 1, 2, 3, 4 are one set;
 1, 2 are normal closed (NC);
 3, 4 are normal opened (NO).

PANEL CUTOUT
 MAX. PANEL THICKNESS
 6 mm

L: 1NO1NC L=29
 2NO2NC L=36.5

Part Number: LAS1Y-□■/△/◎

| □ | Contact structure | ■ | Operation mode | △ | Cap Color | ◎ | IP class |
|----|-------------------|-----------|----------------|---|-----------|-----------|----------|
| 11 | 1NO1NC | No Letter | Momentary | R | Red | No Letter | IP40 |
| 22 | 2NO2NC | Z | Latching | G | Green | FP | IP67 |
| | | | | Y | Yellow | | |
| | | | | B | Blue | | |
| | | | | W | White | | |

Seal Ring

SPECIFICATIONS:

- Switch Rating: AC220V/2A, DC220V/0.1A.
- Mechanical Life: Momentary $\geq 1,000,000$ cycles
Latching $\geq 500,000$ cycles.
- Electrical Life: $\geq 50,000$ cycles.
- Contact Resistance: $\leq 50m\Omega$.
- Insulation Resistance: $\geq 100M\Omega$.
- Dielectric Strength:
Between contact and lamp terminals: AC 2,000V, RMS 50Hz, 1min;
Between terminals of the same pole: AC 1,500V, RMS 50Hz, 1min;
Between terminals of different pole: AC 2,000V, RMS 50Hz, 1min.
- Operating Temperature: $-25^{\circ}C \sim +55^{\circ}C$ (No Freezing).
- Operating Force: About 2N.
- Terminal Type: Pin Terminal (1.8 x 0.4mm).
- IP Class: IP40, IP67 (with a seal cover).

MATERIALS:

- Contact: Silver alloy.
- Button: PC.
- Body: PC.
- Base: UF.

| | | | |
|---|---|-------------------|-------------------------------|
| BRAND 品牌 ONPOW | 红波按钮制造有限公司 ONPOW PUSH BUTTON MANUFACTURE CO.,LTD. | | |
| | USED 用途 | APPD 审核 | CH 2020/04/29 |
| THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD. | FINISH 处理 | CHKD 校对 | NCH 2020/04/29 |
| | SCALE 比例 1.5 / 1 | UNIT 单位 mm | DR. 制图 ZPD 2020/04/29 |
| DIMENSIONS | TOLERANCE | TITLE 名称 | LAS1 Series pushbutton switch |
| 0.00 TO 18.00mm | $\pm 0.43mm$ | DWG NO. 图号 | LAS1Y不带灯 |
| 18.01 TO 30.00mm | $\pm 0.52mm$ | FILE NAME 档案名称 | LAS1F.DWG |
| 30.01 TO 50.00mm | $\pm 0.62mm$ | SHEET 张 | 1 / 1 |
| 50.01 TO 80.00mm | $\pm 0.74mm$ | REV. 更改 | 1 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pushbutton Switches](#) category:

Click to view products by [Onpow](#) manufacturer:

Other Similar products are found below :

[LW1L-M1C10V-A](#) [LW2L-A1C20M-GD](#) [LW2L-M1C20M-A](#) [60324L](#) [M7E-HRN2](#) [67021K512](#) [67081K512X](#) [701PB580](#) [719-5504-000](#)
[MDPSSGLFS](#) [810KSV30B](#) [FLT 2U EE 01A](#) [MML21KA3ABK](#) [MML23KA3AC05K-001](#) [MML23KW3AA01W](#) [8418K2](#) [8646AB6X718UL](#)
[8646ABUL](#) [FSDWH](#) [9001KXRK](#) [9001T8BK](#) [9533CD4+U574+U4922](#) [1203MRA](#) [A22EM01S](#) [A595](#) [1202A6](#) [12037A2ULCSA](#) [1203A2UL](#)
[ABD122N-B](#) [1211390004](#) [ABN111-Y](#) [ABN400-R](#) [1211500044](#) [1211580012](#) [1212MRA](#) [1232A6NF](#) [RA3CSH6A](#) [1241.1183.7047](#)
[1241.2511](#) [1241.3428](#) [1223A2ULCSA](#) [1223MRA](#) [1232AX2119](#) [1241.1183.8000](#) [1241.1183.8029](#) [1241.2506](#) [1241.2606](#) [12MA6](#)
[1301940184](#) [RELBARF6X10\(PLASTIC\)](#)