


1N6373 - 1N6381 Series (ICTE-5 - ICTE-36)

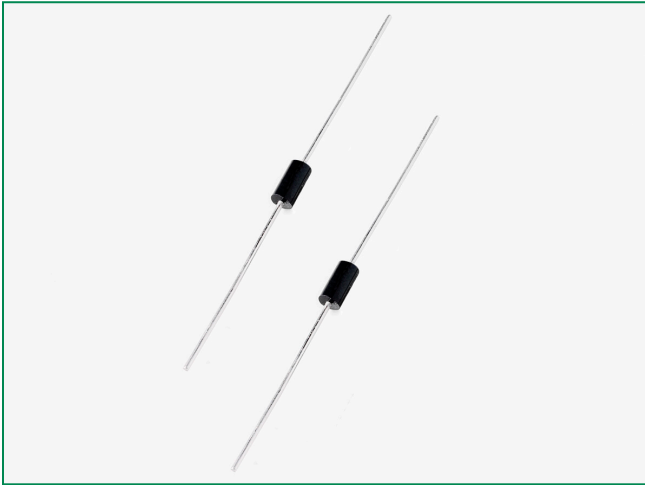

Maximum Ratings and Thermal Characteristics

| Rating | Symbol | Value | Unit |
|--|-----------------|----------------|-------|
| Peak Power Dissipation (Note 1) @ $T_L = 25^\circ\text{C}$ | P_{PK} | 1500 | W |
| Steady State Power Dissipation @ $T_L = 75^\circ\text{C}$, Lead Length = 3/8 ≤ Derated above $T_L = 75^\circ\text{C}$ | P_{PK} | 5.0 | W |
| | | 20 | mW/°C |
| Thermal Resistance, Junction-to-Lead | $R_{\theta JL}$ | 20 | °C/W |
| Forward Surge Current (Note 2) @ $T_A = 25^\circ\text{C}$ | I_{FSM} | 200 | A |
| Operating and Storage Temperature Range | T_J, T_{stg} | -65 to +175 | °C/W |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. Nonrepetitive current pulse per Figure 5 and derated above $T_A = 25^\circ\text{C}$ per Figure 2.
2. 1/2 sine wave (or equivalent square wave), $PW = 8.3 \text{ ms}$, duty cycle = 4 pulses per minute maximum.


Description

These devices are designed to protect voltage sensitive components from high voltage, high-energy transients. They have excellent clamping capability, high surge capability, low zener impedance and fast response time. These devices are the Littelfuse exclusive, cost effective, highly reliable axial leaded package and are ideally suited for use in communication systems, numerical controls, process controls, medical equipment, business machines, power supplies and many other industrial/consumer applications, to protect CMOS, MOS and Bipolar integrated circuits

Features

- Working Peak Reverse Voltage Range - 5.0 V to 45 V
- Peak Power - 1500 Watts @ 1 ms
- ESD Rating of Class 3 (>16 KV) per Human Body Model
- Low Leakage < 5 μA Above 10 V
- Response Time is Typically < 1 ns
- Pb-Free Packages are Available*

Functional Diagram



Additional Information



Datasheet




Resources



Samples

I-V Curve Characteristics (TA = 25 °C unless otherwise noted, VF = 3.5V Max. @ IF (Note 3) = 100 A)

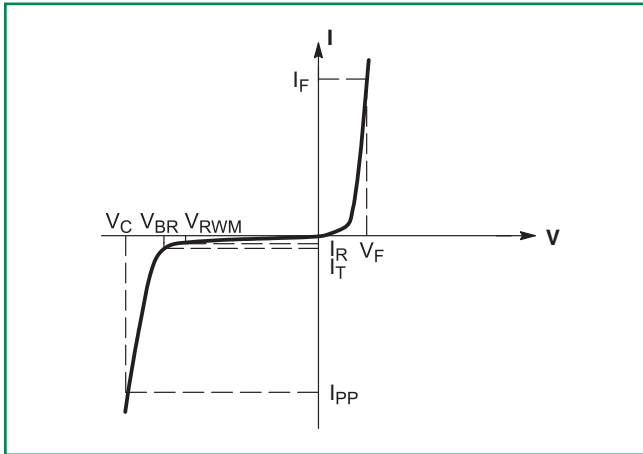

| Symbol | Parameter |
|-----------|---|
| I_{PP} | Maximum Reverse Peak Pulse Current |
| V_C | Clamping Voltage @ I_{PP} |
| V_{RWM} | Working Peak Reverse Voltage |
| I_R | Maximum Reverse Leakage Current @ V_{RWM} |
| V_{BR} | Breakdown Voltage @ I_T |
| I_T | Test Current |
| I_F | Forward Current |
| V_F | Forward Voltage @ I_F |

Ratings and Characteristic Curves

Figure 1. Pulse Rating Curve

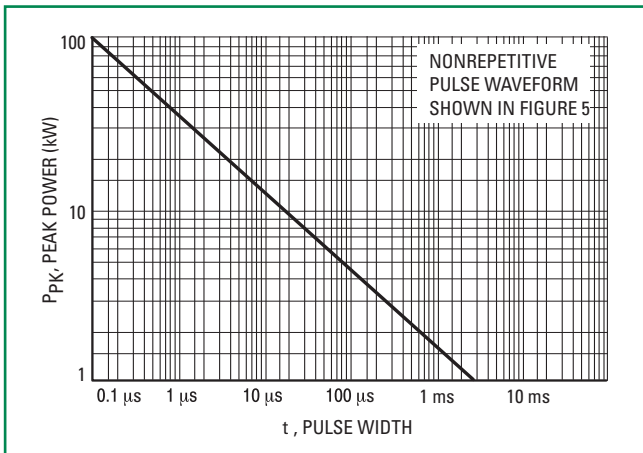


Figure 2. Pulse Derating Curve

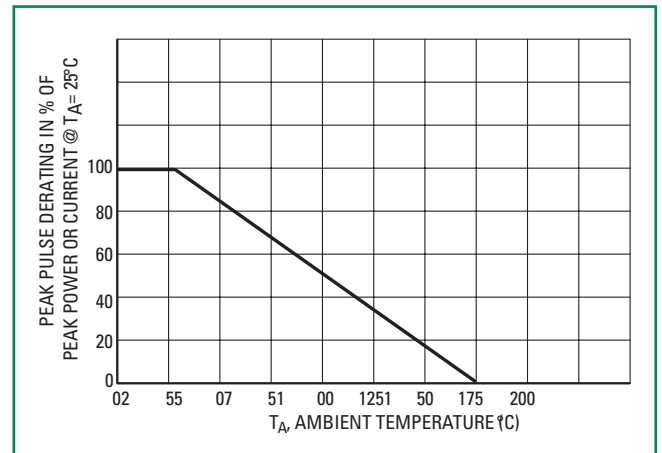


Figure 3. Capacitance versus Breakdown Voltage

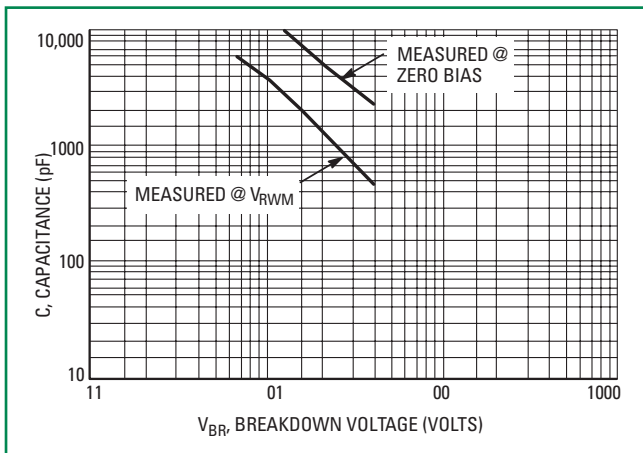


Figure 4. Steady State Power Derating

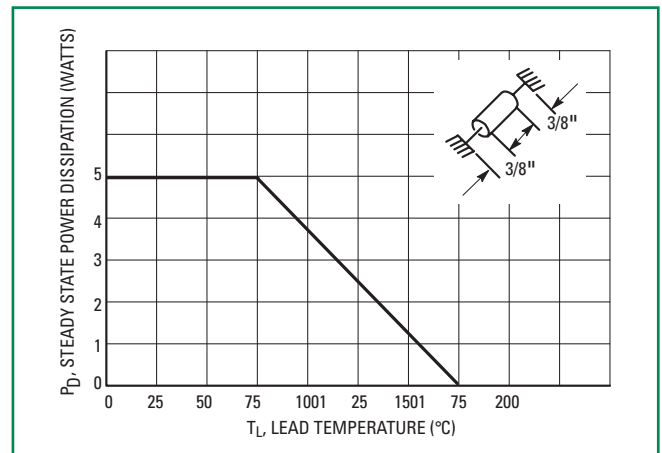


Figure 5. Pulse Waveform

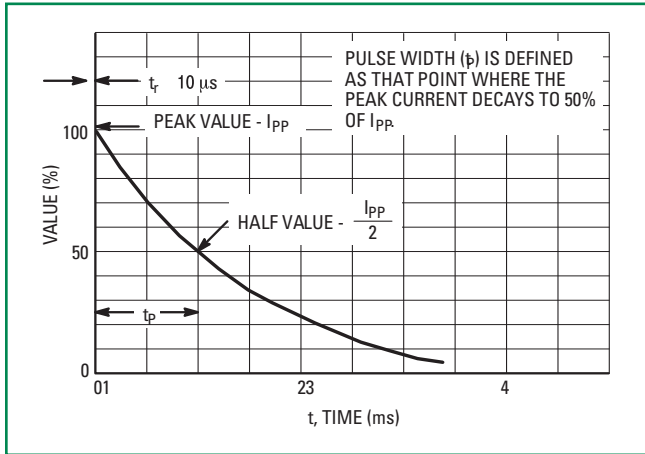


Figure 6. Dynamic Impedance


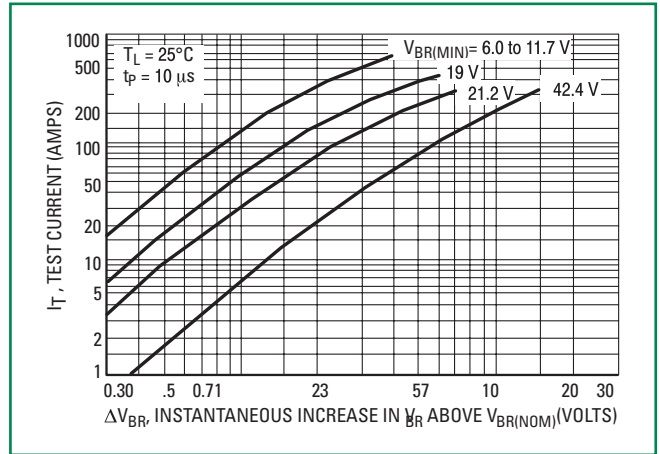


Figure 7. Typical Derating Factor for Duty Cycle

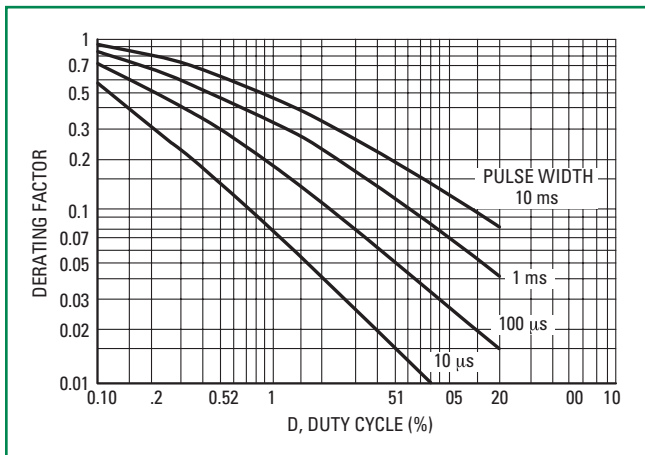

Electrical Characteristics (TA = 25 ° C unless otherwise noted, VF = 3.5 V Max. @ IF (Note 3) = 53 A)

| JEDEC Device† (ON Device) | Device Marking | V _{RWM} (Note 4) | I _R @ V _{RWM} | Breakdown Voltage | | | | V _C @ I _{PP} (Volts) (Note 6) | | V _C (Volts) (Note 6) | | CV _{BR} (mV/°C) |
|---------------------------|----------------|---------------------------|-----------------------------------|------------------------------|-----|-----|------------------|---|-----------------|---------------------------------|--------------------------|--------------------------|
| | | | | V _{BR} (V) (Note 5) | | | @ I _T | V _C | I _{PP} | @ I _{PP} = 1 A | @ I _{PP} = 10 A | |
| | | | | Min | Nom | Max | (mA) | (Volts) | (A) | | | |
| 1N6373, G | 1N6373 | 5.0 | 300 | 6.0 | - | - | 1.0 | 9.4 | 160 | 7.1 | 7.5 | 4.0 |
| 1N6374, G | 1N6374 | 8.0 | 25 | 9.4 | - | - | 10 | 15 | 100 | 11.3 | 11.5 | 8.0 |
| 1N6375, G | 1N6375 | 10 | 2.0 | 11.7 | - | - | 1.0 | 16.7 | 90 | 13.7 | 14.1 | 12 |
| 1N6376, G | 1N6376 | 12 | 2.0 | 14.1 | - | - | 1.0 | 21.2 | 70 | 16.1 | 16.5 | 14 |
| 1N6377, G | 1N6377 | 15 | 2.0 | 17.6 | - | - | 1.0 | 25 | 60 | 20.1 | 20.6 | 18 |
| 1N6380, G | 1N6380 | 36 | 2.0 | 42.4 | - | - | 1.0 | 65.2 | 23 | 50.6 | 54.3 | 50 |
| 1N6381, G | 1N6381 | 45 | 2.0 | 52.9 | - | - | 1.0 | 78.9 | 19 | 63.3 | 70 | 60 |
| ICTE-5RLG | ICTE-5 | 5.0 | 300 | 6.0 | - | - | 1.0 | 9.4 | 160 | 7.1 | 7.5 | 4.0 |
| ICTE-10RLG | ICTE-10 | 10 | 2.0 | 11.7 | - | - | 1.0 | 16.7 | 90 | 13.7 | 14.1 | 8.0 |
| ICTE-12RLG | ICTE-12 | 12 | 2.0 | 14.1 | - | - | 1.0 | 21.2 | 70 | 16.1 | 16.5 | 12 |
| ICTE-15RLG | ICTE-15 | 15 | 2.0 | 17.6 | - | - | 1.0 | 25 | 60 | 20.1 | 20.6 | 14 |
| ICTE-18, G | ICTE-18 | 18 | 2.0 | 21.2 | - | - | 1.0 | 30 | 50 | 24.2 | 25.2 | 18 |
| ICTE-36RLG | ICTE-36 | 36 | 2.0 | 42.4 | - | - | 1.0 | 65.2 | 23 | 50.6 | 54.3 | 26 |

3. Square waveform, PW = 8.3 ms, non-repetitive duty cycle.


4. A transient suppressor is normally selected according to the maximum working peak reverse voltage (V_{RWM}), which should be equal to or greater than the DC or continuous peak operating voltage level.

5. V_{BR} measured at pulse test current I_T at an ambient temperature of 25°C and minimum voltage in V_{BR} is to be controlled.

6. Surge current waveform per Figure 5 and derate per Figures 1 and 2.

†The "G" suffix indicates Pb-Free package or Pb-Free packages are available.

Dimensions

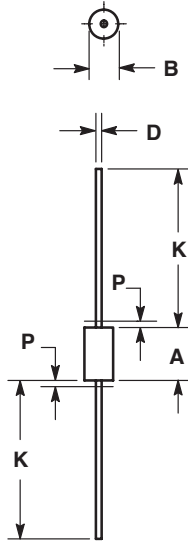


| Dim | Inches | | Millimeters | |
|-----|--------|-------|-------------|------|
| | Min | Max | Min | Max |
| A | 0.335 | 0.374 | 8.50 | 9.50 |
| B | 0.189 | 0.209 | 4.80 | 5.30 |
| D | 0.038 | 0.042 | 0.96 | 1.06 |
| K | 1.000 | — | 25.40 | — |
| P | — | 0.050 | — | 1.27 |

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. LEAD FINISH AND DIAMETER UNCONTROLLED IN DIMENSION P.
4. 041A-01 THRU 041A-03 OBSOLETE, NEW STANDARD 041A-04.

Part Marking System

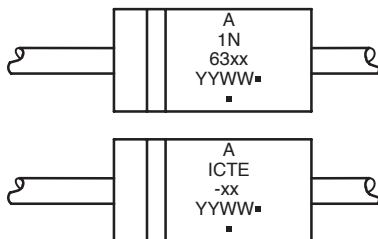

- A= Assembly Location
 - 1N63xx= JEDEC Device Code
 - ICTE-xx = ON Device Code
 - YY = Year
 - WW = Work Week
 - = Pb-Free Package
- (Note: Microdot may be in either location)

ORDERING INFORMATION

| Device | Package | Shipping† |
|---------------|----------------------|------------------|
| 1N63xx, G | Axial Lead (Pb-Free) | 500 Units/Box |
| 1N63xxRL4, G | Axial Lead (Pb-Free) | 1500/Tape & Reel |
| ICTE-xx, G | Axial Lead (Pb-Free) | 500 Units/Box |
| ICTE-xxRL4, G | Axial Lead (Pb-Free) | 1500/Tape & Reel |

Flow/Wave Soldering (Solder Dipping)

| | |
|---------------------------|------------------------------------|
| Peak Temperature : | 260°C |
| Dipping Time : | 1/16" from the case for 10 seconds |

Physical Specifications

| | |
|--------------------------|--|
| Case | Void-free, transfer-molded, thermosetting plastic |
| Leads | Modified L-Bend providing more contact area to bond pads |
| Finish | All external surfaces are corrosion resistant and leads are readily solderable |
| Mounting Position | Any |

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: www.littelfuse.com/disclaimer-electronics.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:

Click to view products by [ON Semiconductor](#) manufacturer:

Other Similar products are found below :

[60KS200C](#) [D12V0H1U2WS-7](#) [D18V0L1B2LP-7B](#) [82356050220](#) [D5V0F4U5P5-7](#) [D5V0M5U6V-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#)
[P6KE39CA-TP](#) [P6KE8.2A](#) [SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ8.0A](#) [SMLJ30CA-TP](#) [ESD112-B1-02EL E6327](#)
[ESD119B1W01005E6327XTSA1](#) [ESD5V0J4-TP](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#)
[SCM1293A-04SO](#) [ESD203-B1-02EL E6327](#) [SM12-7](#) [SMF8.0A-TP](#) [SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [82356240030](#)
[VESD12A1A-HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDUR24V-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#)
[D1213A-02WL-7](#) [ESDLIN1524BJ-HQ](#) [5KP100A](#) [5KP15A](#)