

Is Now Part of



## **ON Semiconductor**®

# To learn more about ON Semiconductor, please visit our website at <u>www.onsemi.com</u>

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at <a href="mailto:www.onsemi.com">www.onsemi.com</a>. Please email any questions regarding the system integration to <a href="mailto:Fairchild\_questions@onsemi.com">Fairchild\_questions@onsemi.com</a>.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or unavteries, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out or i, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor and is officers, employees, uniotificated use, even if such claim any manner.

BAT54 / BAT54A / BAT54C / BAT54S — Schottky Diodes


April 2016



## BAT54 / BAT54A / BAT54C / BAT54S Schottky Diodes



3 **L4P** 1 2 MARKING BAT54 = L4P BAT54A = L42 BAT54C = L43 BAT54S = L44



#### **Ordering Information**

| Part Number | Top Mark | Package   | Packing Method        |
|-------------|----------|-----------|-----------------------|
| BAT54       | L4P      | SOT-23 3L | 3k per Tape and Reel  |
| BAT54_D87Z  | L4P      | SOT-23 3L | 10k per Tape and Reel |
| BAT54A      | L42      | SOT-23 3L | 3k per Tape and Reel  |
| BAT54C      | L43      | SOT-23 3L | 3k per Tape and Reel  |
| BAT54S      | L44      | SOT-23 3L | 3k per Tape and Reel  |
| BAT54S_D87Z | L44      | SOT-23 3L | 10k per Tape and Reel |

#### **Absolute Maximum Ratings**

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only. Values are at  $T_A = 25^{\circ}$ C unless otherwise noted.

| Symbol             | Parameter   | Value       | Unit |  |
|--------------------|---|-------------|------|--|
| V <sub>RRM</sub>   | Maximum Repetitive Reverse Voltage                                    | 30          | V    |  |
| I <sub>F(AV)</sub> | Average Rectified Forward Current                                     | 200         | mA   |  |
| I <sub>FSM</sub>   | Non-Repetitive Peak Forward Surge Current<br>Pulse Width = 1.0 second | 600         | mA   |  |
| T <sub>STG</sub>   | Storage Temperature Range   | -55 to +150 | °C   |  |
| ТJ                 | Operating Junction Temperature  | -55 to +150 | °C   |  |

#### **Thermal Characteristics**


Values are at  $T_A = 25^{\circ}C$  unless otherwise noted.

| Symbol              | Parameter                               | Value | Unit |
|---------------------|---|-------|------|
| PD                  | Power Dissipation                       | 290   | mW   |
| $R_{	ext{	heta}JA}$ | Thermal Resistance, Junction-to-Ambient | 430   | °C/W |

#### **Electrical Characteristics**

Values are at  $T_A = 25^{\circ}C$  unless otherwise noted.

| Symbol          | Parameter             | Conditions   | Min. | Max. | Unit |
|-----------------|-----------------------|--|------|------|------|
| V <sub>R</sub>  | Breakdown Voltage     | I <sub>R</sub> = 10 μA   | 30   |      | V    |
| V <sub>F</sub>  | Forward Voltage       | I <sub>F</sub> = 0.1 mA  |      | 240  | mV   |
|                 |                       | I <sub>F</sub> = 1 mA  |      | 320  | mV   |
|                 |                       | I <sub>F</sub> = 10 mA   |      | 400  | mV   |
|                 |                       | I <sub>F</sub> = 30 mA   |      | 500  | mV   |
|                 |                       | l <sub>F</sub> = 100 mA  |      | 0.8  | V    |
| I <sub>R</sub>  | Reverse Leakage       | V <sub>R</sub> = 25 V  |      | 2    | μΑ   |
| CT              | Total Capacitance     | V <sub>R</sub> = 1 V, f = 1.0 MHz  |      | 10   | pF   |
| t <sub>rr</sub> | Reverse Recovery Time | $    I_F = I_R = 10 \text{ mA}, I_{RR} = 1.0 \text{ mA},                                   $ |      | 5.0  | ns   |

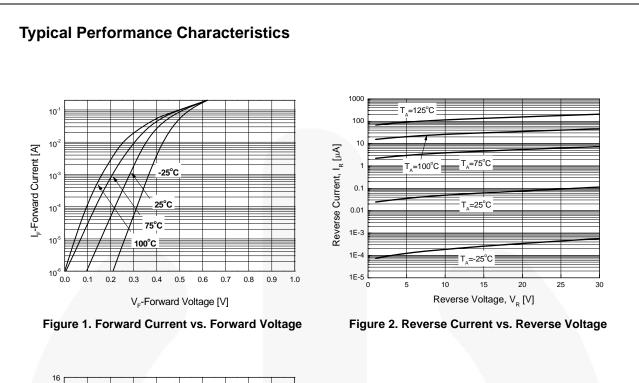




Figure 3. Total Capacitance vs. Reverse Voltage



ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor has against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death ass

#### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81-3-5817-1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

© Semiconductor Components Industries, LLC

### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Schottky Diodes & Rectifiers category:

Click to view products by ON Semiconductor manufacturer:

Other Similar products are found below :

MA4E2039 D1FH3-5063 MBR10100CT-BP MBR1545CT MMBD301M3T5G RB160M-50TR RB551V-30 BAS16E6433HTMA1 BAT 54-02LRH E6327 NSR05F40QNXT5G NTE555 JANS1N6640 SB07-03C-TB-H SB1003M3-TL-W SK310-T SK32A-LTP SK34B-TP SS3003CH-TL-E GA01SHT18 CRS10I30A(TE85L,QM MA4E2501L-1290 MBRB30H30CT-1G SB007-03C-TB-E SK32A-TP SK33B-TP SK38B-TP NRVBM120LT1G NTE505 NTSB30U100CT-1G SS15E-TP VS-6CWQ10FNHM3 ACDBA1100LR-HF ACDBA1200-HF ACDBA140-HF ACDBA2100-HF ACDBA3100-HF CDBQC0530L-HF ACDBA340-HF ACDBA260LR-HF ACDBA1100-HF SK310B-TP MA4E2502L-1246 MA4E2502H-1246 NRVBM120ET1G NSR01L30MXT5G NTE573 NTE6081 SB560 PMAD1108-LF SD103ATW-TP