

Is Now Part of



## **ON Semiconductor**®

# To learn more about ON Semiconductor, please visit our website at <u>www.onsemi.com</u>

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at <a href="mailto:www.onsemi.com">www.onsemi.com</a>. Please email any questions regarding the system integration to <a href="mailto:Fairchild\_questions@onsemi.com">Fairchild\_questions@onsemi.com</a>.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or unavteries, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out or i, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor and is officers, employees, uniotificated use, even if such claim any manner.


KA393 / KA393A, KA2903 **Dual Differential Comparator** Description Single Supply Operation: 2V to 36V Dual Supply Operation: ±1V to ±18V Allow Comparison of Voltages Near Ground

- Potential
- Low Current Drain: 800µA Typical
- Compatible with all Forms of Logic
- Low Input Bias Current: 25nA Typical
- Low Input Offset Current: ±5nA Typical
- Low Offset Voltage: ±1mV Typical

The KA393 / KA393A / KA2903 series consists of two independent voltage comparators designed to operate from a single power supply over a wide voltage range.

Figure 1. DIP Package

Figure 2. SOIC Package



## IN2(-) IN2(+)GND O


Vcc


Vcc

OUTPUT 2

### **Ordering Information**

Part Number Operating Temperature Range		Package	Packing Method		
KA393	0 to 70°C		Tube		
KA393A	0 to 70°C	8-Lead DIP	Tube		
KA393DTF	0 to 70°C		Tape and Reel		
KA393ADTF	0 to 70°C	8-Lead SOIC	Tape and Reel		
KA2903DTF	-40 to 85°C		Tape and Reel		

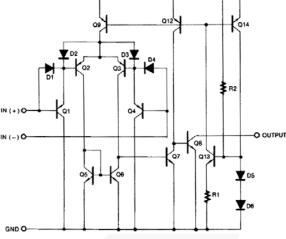





**Features** 

OUTPUT 1

IN1(-)

IN1(+)

GND

June 2011

**Absolute Maximum Ratings** 

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Symbol	Parameter			Max.	Unit	
V <sub>CC</sub>	Power Supply Voltage			36	V	
$V_{I(DIFF)}$	Differential Input Voltage			36	V	
VI	Input Voltage		-0.3	+36.0	6.0 V	
	Output Short Circuit to GND		Continuous			
$P_D$ Power Dissipation $T_A = 25^{\circ}C$	Power Dissipation,	8-DIP		1040	mW	
		8-SOIC		480		
T <sub>OPR</sub>	Operating Temperature	KA393 / KA393A	0	+70	°C	
		KA2903	-40	+85		
T <sub>STG</sub>	Storage Temperature		-65	+150	°C	
R(-)	Thermal Resistance, Junction-to-Ambient	8-DIP		120	°C/W	
		8-SOIC		260		
ESD	Electrostatic Discharge	Human Body Model, JESD22-A114		1000	v	
	Capability	Charged Device Model, JESD22-C101		2000		


KA393 /
(A393 / KA393A,
, KA2903 –
- Dual I
<b>Dual Differential C</b>
Comparator


### **Electrical Characteristics**

 $V_{CC}$  = 5V and  $T_A$  = 25°C, Unless otherwise specified.


Symbol	Para	ameter	Conditions	Min.	Тур.	Max.	Unit
		144.000	V <sub>O(P)</sub> =1.4V, R <sub>S</sub> =0Ω		±1	±5	
	Input Offset	KA393	V <sub>CM</sub> = 0 to1.5V, T <sub>A</sub> = 0 to +70°C			±9	mV
	Voltage		V <sub>O(P)</sub> =1.4V, R <sub>S</sub> =0Ω		±1	±2	
		KA393A	V <sub>CM</sub> = 0 to1.5V, T <sub>A</sub> = 0 to +70°C			±4	
		· ·	T <sub>A</sub> =25°C		±5	±50	nA
I <sub>IO</sub>	Input Offset Cu	irrent	T <sub>A</sub> = 0 to +70°C			±150	
			T <sub>A</sub> =25°C		65	250	nA
BIAS	Input Bias Curi	rent	T <sub>A</sub> = 0 to +70°C			400	
	Input Common-Mode Voltage		T <sub>A</sub> =25°C	0		V <sub>CC</sub> -1.5	
$V_{I(R)}$	Range	J	T <sub>A</sub> = 0 to +70°C	0		V <sub>CC</sub> -2.0	V
			R <sub>L</sub> = ∞, V <sub>CC</sub> = 5V		0.6	1.0	mA
I <sub>CC</sub>	Supply Current	urrent	R <sub>L</sub> = ∞, V <sub>CC</sub> = 30V		0.8	2.5	
V <sub>G</sub>	Voltage Gain		V <sub>CC</sub> =15V, R <sub>L</sub> ≥15KΩ, (for Large V <sub>O(P-P)</sub> Swing)	50	200		V/mV
t <sub>LRES</sub>	Large Signal Response Time		$V_{I}$ =TTL Logic Swing $V_{REF}$ =1.4V, $V_{RL}$ =5V, $R_{L}$ =5.1K $\Omega$		350		ns
t <sub>RES</sub>	Response Tim	e	V <sub>RL</sub> =5V, R <sub>L</sub> =5.1KΩ		1.4		μs
I <sub>SINK</sub>	Output Sink Current		$V_{I(-)} \ge 1V, V_{I(+)} = 0V, V_{O(P)} \le 1.5V$	6	18		mA
.,		utput Saturation Voltage	V <sub>I(-)</sub> ≥ 1V, V <sub>I(+)</sub> =0V		160	400	mV
V <sub>SAT</sub> Output Sa	Output Saturat		$I_{SINK}$ =4mA, $T_A$ = 0 to +70°C			700	
		0	V <sub>I(-)</sub> = 0V, V <sub>I(+)</sub> = 1V, V <sub>O(P)</sub> = 5V		0.1		nA
I <sub>O(LKG)</sub>	LKG) Output Leakage Current		V <sub>I(-)</sub> = 0V, V <sub>I(+)</sub> = 1V, V <sub>O(P)</sub> = 30V			1.0	μA
<b>KA2903</b>							
			V <sub>O(P)</sub> =1.4V, R <sub>S</sub> =0Ω		±1	±7	mV
V <sub>IO</sub>	Input Offset Vo	bitage	V <sub>CM</sub> = 0 to1.5V, T <sub>A</sub> = -40 to +85°C		±9	±15	
			T <sub>A</sub> =25°C		±5	±50	nA
I <sub>IO</sub>	Input Offset Cu	irrent	T <sub>A</sub> = -40 to +85°C		±50	±200	
			T <sub>A</sub> =25°C		65	250	nA
IBIAS	Input Bias Current	rent	T <sub>A</sub> = -40 to +85°C			500	
	Input Common-Mod	-Mode Voltage	T <sub>A</sub> =25°C	0		V <sub>CC</sub> -1.5	
V <sub>I(R)</sub>	Range	0	T <sub>A</sub> = -40 to +85°C	0		V <sub>CC</sub> -2.0	V
		ipply Current	R <sub>L</sub> = ∞, V <sub>CC</sub> = 5V		0.6	1.0	mA
I <sub>CC</sub> Supply C	Supply Current		R <sub>L</sub> = ∞, V <sub>CC</sub> = 30V		1.0	2.5	
$V_{G}$	Voltage Gain		V <sub>CC</sub> =15V, R <sub>L</sub> ≥15KΩ, (for Large V <sub>O(P-P)</sub> Swing)	25	100		V/mV
t <sub>LRES</sub>	Large Signal R	esponse Time	$      V_{I} = TTL \ Logic \ Swing \ V_{REF} = 1.4V, \\ V_{RL} = 5V, \ R_{L} = 5.1K\Omega $		350		ns
t <sub>RES</sub>	Response Tim	e	V <sub>RL</sub> =5V, R <sub>L</sub> =5.1KΩ		1.5		μs
I <sub>SINK</sub>	Output Sink Cu	urrent	$V_{I(-)} \ge 1V, V_{I(+)} = 0V, V_{O(P)} \le 1.5V$	6	16		mA
V	Output Saturation Voltage		$V_{I(-)} \ge 1V, V_{I(+)} = 0V$		160	400	mV
V <sub>SAT</sub>			$I_{SINK}$ =4mA, $T_A$ = -40 to +85°C			700	
	Output Leakage Current		V <sub>I(-)</sub> = 0V, V <sub>I(+)</sub> = 1V, V <sub>O(P)</sub> = 5V		0.1		nA
I <sub>O(LKG)</sub>			$V_{I(-)} = 0V, V_{I(+)} = 1V, V_{O(P)} = 30V$		1	1.0	μA



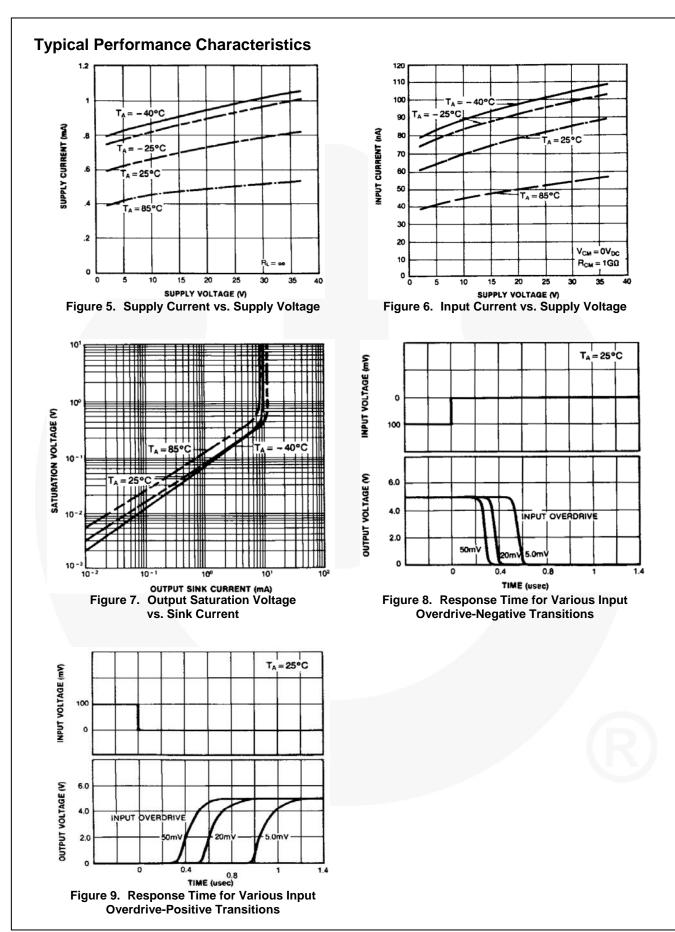

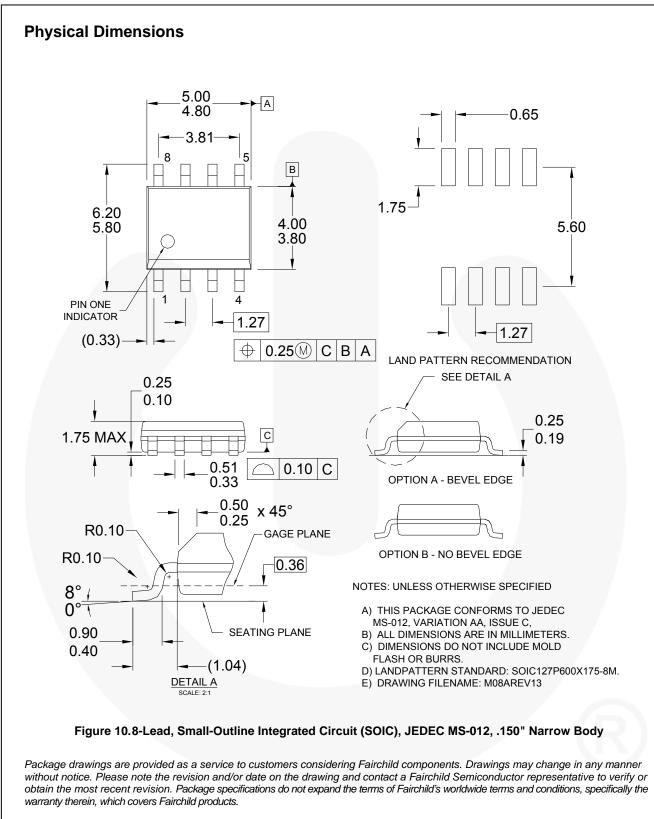

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings: <u>http://www.fairchildsemi.com/packaging/</u>. KA393 / KA393A, KA2903 — Dual Differential Comparator

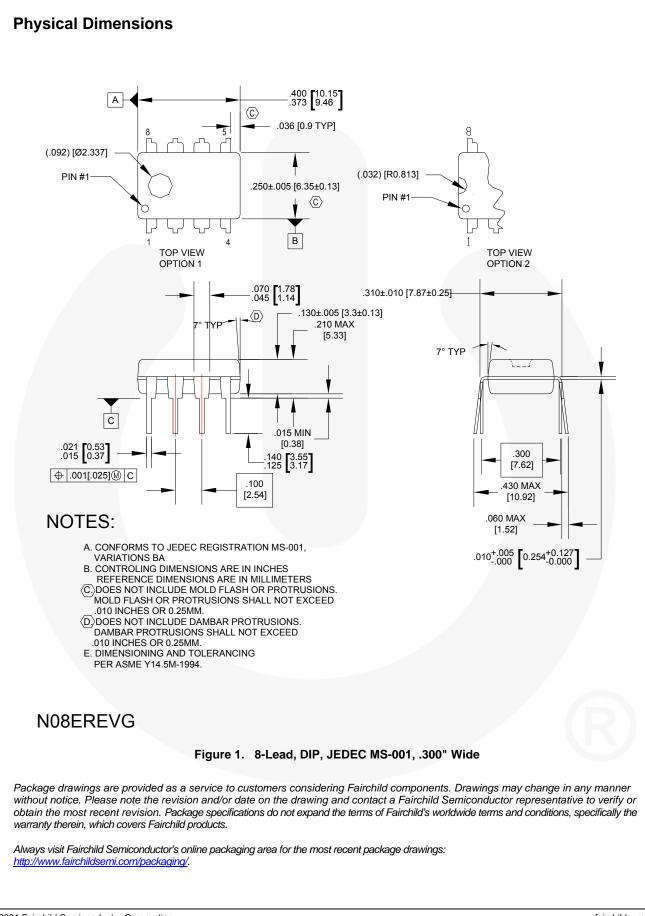



SEMICONDUCTOR

#### TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

FPS™ AccuPower™ Auto-SPM™ F-PFS™ AX-CAP™ BitSiC<sup>®</sup> **FRFET**® Global Power Resource<sup>sM</sup> Green FPS™ Build it Now™ Green FPS™ e-Series™ CorePLUS™ Gmax™ CorePOWER™ GTO™ CROSSVOLT™ CTI TM IntelliMAX™ ISOPLANAR™ Current Transfer Logic™ DEUXPEED® MegaBuck™ Dual Cool™ MICROCOUPLER™ EcoSPARK® MicroFET™ EfficientMa×™ MicroPak™ ESBC™ MicroPak2™ ® MillerDrive™ F MotionMax™ Fairchild® Motion-SPM™ Fairchild Semiconductor® mWSaver™ FACT Quiet Series™ OptoHiT™ FACT OPTOLOGIC® FAST® **OPTOPLANAR®** FastvCore™ FETBench™ FlashWriter®\*

Power-SPM™ PowerTrench<sup>®</sup> PowerXS™ QFĔT QS™ Quiet Series™ )™ SignalWise™ SmartMax™ SPM® STEALTH™ SuperFET® SuperSOT™-3 SuperSOT™-6 SuperSOT™-8 SupreMOS<sup>®</sup> SyncFET™ Sync-Lock™

Programmable Active Droop™ RapidConfigure™ Saving our world, 1mW/W/kW at a time™ SMART START™ 

**Wer** franchise TinyBoost™ TinyBuck™ TinyCalc™ TinyLogic<sup>®</sup> TINYOPTOT TinγPower™ TinyPVM™ TinyWire™ TranSiC<sup>®</sup> TriFault Detect™ TRUECURRENT®\*

The Power Franchise®

The Right Technology for Your Success™



Ultra FRFET™ UniEET™ VCX™ VisualMax™ XS™

\* Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

PDP SPM™

#### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user

2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

#### ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors

#### PRODUCT STATUS DEFINITIONS

#### Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
		Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed Full Production Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.		Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.
Obsolete Not In Production		Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.

Rev 154

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor has against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death ass

#### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81-3-5817-1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

© Semiconductor Components Industries, LLC

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Analog Comparators category:

Click to view products by ON Semiconductor manufacturer:

Other Similar products are found below :

SC2903VDR2G LM2901SNG LM339SNG 55122 5962-8757203IA NTE911 5962-8751601DA LM339EDR2G NTE922 SC2901DR2G LM2903M/TR LM2903F-E2 MCP6544-EP LM2901EDR2G TS391SN2T1G LM111JG LM239APT 5962-8765801PA MAX9024AUD+ LT6700HVIS6-2#TRMPBF 5962-8765902CA ADCMP394ARZ-RL7 LM339AMX LTC1440IMS8#PBF AZV331KSTR-G1 LTC1841IS8#PBF LTC1440CN8#PBF LTC1542CS8#PBF LTC1445CS#PBF TL331VSN4T3G LT6700IDCB-1#TRMPBF LTC1042CN8#PBF LTC1540CMS8#PBF LT6703CDC-2#TRMPBF ADCMP607BCPZ-R7 LT1720CDD#PBF LTC1040CN#PBF LT6700MPDCB-1#TRMPBF LT6700IDCB-3#TRMPBF LTC1440IS8#PBF S-89431ACNC-HBVTFG NTE1718 NTE943 NTE943M NTE943SM TA75S393F,LF(T ALD2301APAL ALD2302APAL TSX3704IYPT AD790JNZ